


# Outdoor Digital Advertising Displays

22" | 32" | 43" | 49" | 55" | 65"

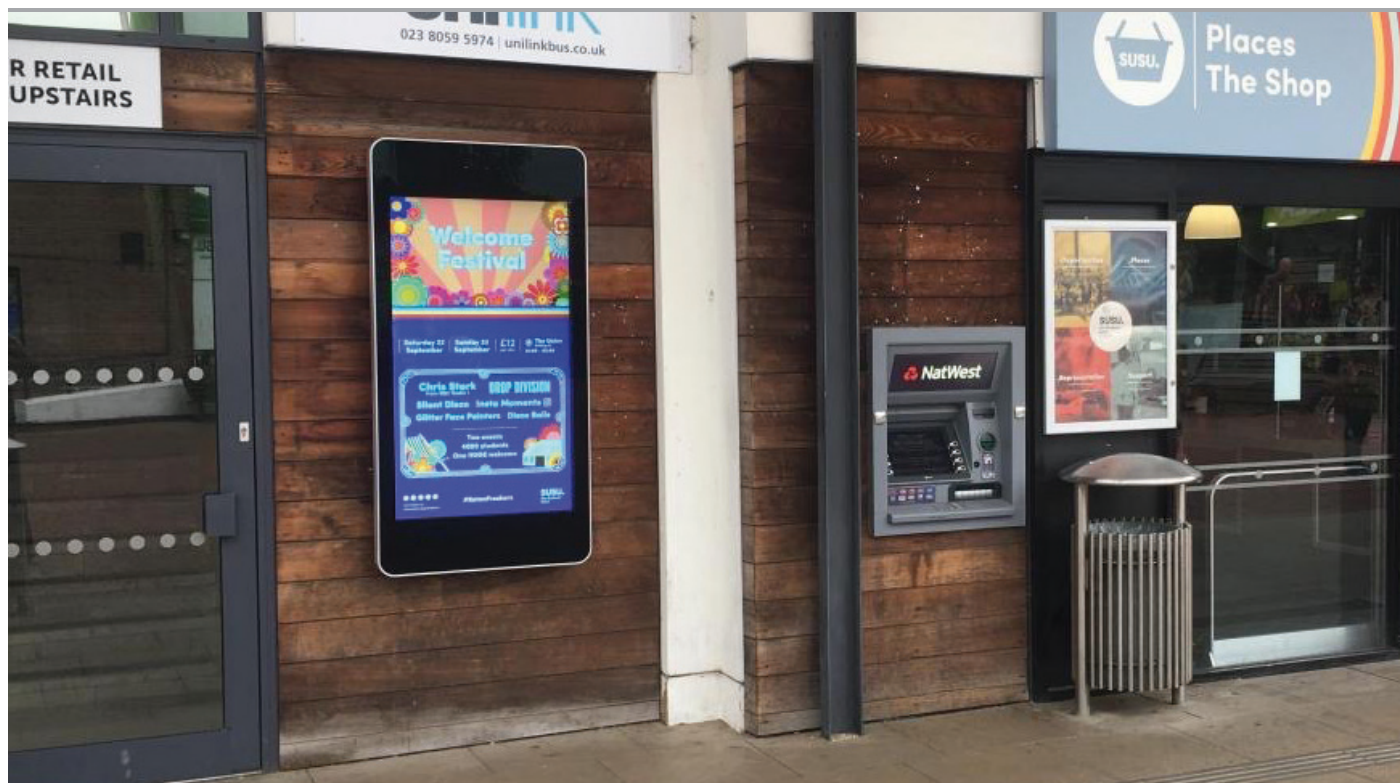

Fully integrated stunning tablet-style displays; perfect for any weather conditions

## Direct Sunlight Readable

Thanks to their commercial grade ultra-high brightness panels (2,500cd/m<sup>2</sup>), these displays are up to 10 times brighter than a domestic TV and so are easily readable even in direct sunlight.



\*22" Display is 2,000cd/m<sup>2</sup>

2,500cd/m<sup>2</sup>

## Weatherproof

Designed to withstand the elements, these displays are protected against all wet weather conditions and airborne dust particles by their robust IP65 rated enclosure. They also feature a waterproof coating on all internal circuit boards and waterproof over-moulded AV connectors.



IP65

- 6** Dust Resistance  
Protected against dust that may harm equipment.
- 5** Water Resistance  
Protected against water spray from all directions.



Vandal Proof



Advanced Temperature Control System



Anti-Reflective Glass



Ambient Light Sensor



Protective UV Film



Landscape or Portrait



Plug and Play



Vandal Proof Wi-Fi Aerial



24/7 Usage




Customisation Available

## Other Features


### Vandal Proof

With a mild steel enclosure and thermally-toughened glass front, these IK10 rated displays are designed to withstand any damage that may occur in public spaces. To avoid tampering, controls and inputs are hidden and cannot be accessed by passers-by.

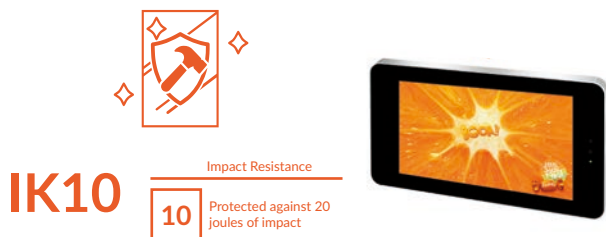

### Advanced Temperature Control System

To maximise the lifespan of the display, the internal airflow system keeps the screen running at the optimal temperature regardless of the external conditions. Built-in air conditioning can be tailored to allow the display to work in any climate.

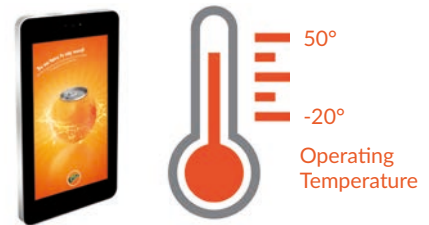

### Anti Reflective Glass

The front glass face is specially treated to help diffuse direct sunlight, making the display easily readable even in bright weather conditions.



### Ultimate UV Protection

The front glass of the display utilises a special UV treatment that reduces the internal heat of the enclosure by up to 71%; reducing the number of cooling fans needed and increasing the life of your display.



### Optional Network Upgrade

The integrated Android media player allows you to easily update on-screen content via USB plug and play. Alternatively, upgrade your screen to be networked without needing any additional hardware to unlock our cloud-based CMS software. Third-party software can be installed instead if required.



### Internal Locker

Should you need run the screen from an external source, there is space to fit a small PC or media player inside the lockable compartment. This can then be connected to the display via the HDMI, VGA or 3.5mm audio inputs.




### Free Lockable Wall Mount

To ensure that this a complete turnkey solution, a lockable wall mount is included at no extra cost, allowing you to securely mount your screen in either landscape or portrait orientation.



### Customisation Available

Bespoke displays can be manufactured to order should you require a non-standard solution, to incorporate a camera or touch screen upgrade for example. We can also modify existing models to add a 4G module for mobile connectivity or a vinyl logo/wrap.

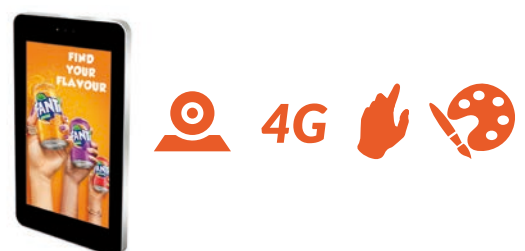

# Key Features



2,500 CD/M<sup>2</sup>  
SUNLIGHT READABLE



IP65 RATED



IK10 RATED



VANDAL PROOF HIGH GAIN  
WI-FI AERIAL



ANDROID MEDIA PLAYER



PROTECTIVE UV FILM




24/7 USAGE




LANDSCAPE OR PORTRAIT  
ORIENTATION




INTERNAL LOCKER



AMBIENT LIGHT SENSOR



FREE LOCKABLE  
WALL MOUNT




4G

CUSTOMISATION  
AVAILABLE

# Specification Table

		22 Inch	32 Inch	43 Inch	49 Inch	55 Inch	65 Inch
Panel	Resolution	1920x1080					3840x2160
	Display Area (mm)	477x270	702x396	941x529	1073x603	1215x686	1428.5x803.5
	Aspect Ratio	16:9					
	Brightness (cd/m <sup>2</sup> )	2,000	2,500				
	Colour	16.7M					
	Viewing Angle	178°					
	Contrast Ratio	8000:1					
AV Inputs	Video	HDMI, VGA (Internal)	HDMI, VGA				
Power	Power Consumption (W)	130	190	250	300	430	550
	Input Voltage	AC110~240V (50Hz~60Hz)					
Mechanical	Unit Size (WxHxD mm)	737x397x120	1041x516x130.2	1410x670x140	1500x746x140	1637x817x140	1910x990x140
	Package Size (WxHxD mm)	860x560x280	1180x650x300	1550x850x300	1630x900x300	1780x1050x300	2060x1280x330
	Landscape VESA Holes (mm)	250x250	340x340	800x400	800x500	800x600	1100x400/1300x400
	Portrait VESA Holes (mm)			400x800	500x800	600x800	600x800/600x1000
	Net Weight (kg)	22	40	65	82	95	115
	Gross Weight (kg)	27	48	82.5	101	115.5	168
	IK Rating	IK10					
Environmental	Operating Temperature:	-20 °C to 50 °C					
	Operating Humidity:	10% - 80%					
	Storage Temperature:	-30°C - 60°C					
	Storage Humidity:	5% - 90%					
	Enclosure Protection	IP65					
Computer	Media Formats	Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG)					
	Media Resolution	1920x1080/1080x1920					
	Internal Memory	6GB					
	CPU	Quad-Core Cortex-A17@1.61GHz					
	GPU	Mali-T760 MP4 @600MHz					
	RAM	2GB DDR3					
	Internal Storage	8GB NAND					
	USB	USB2.0 HOST (x2)					
	LAN	10/100/1000Mb/s Ethernet					
	Wi-Fi	802.11b/g/n/ac					
	OS	Android 5.1.1					
	Graphic Engine	OpenGL ES 1.1/2.0/3.0/3.1, OpenCL 1.1, Renderscript, Direct3D 11.1					
	Accessories	Included	AC Power Cable, Remote Control, Wall Mount				
Optional		Touch Screen Upgrade, Network Upgrade, Camera					
Warranty	Warranty Period	3 Year Warranty					
	Technical Support	Lifetime					

Errors and omissions excepted

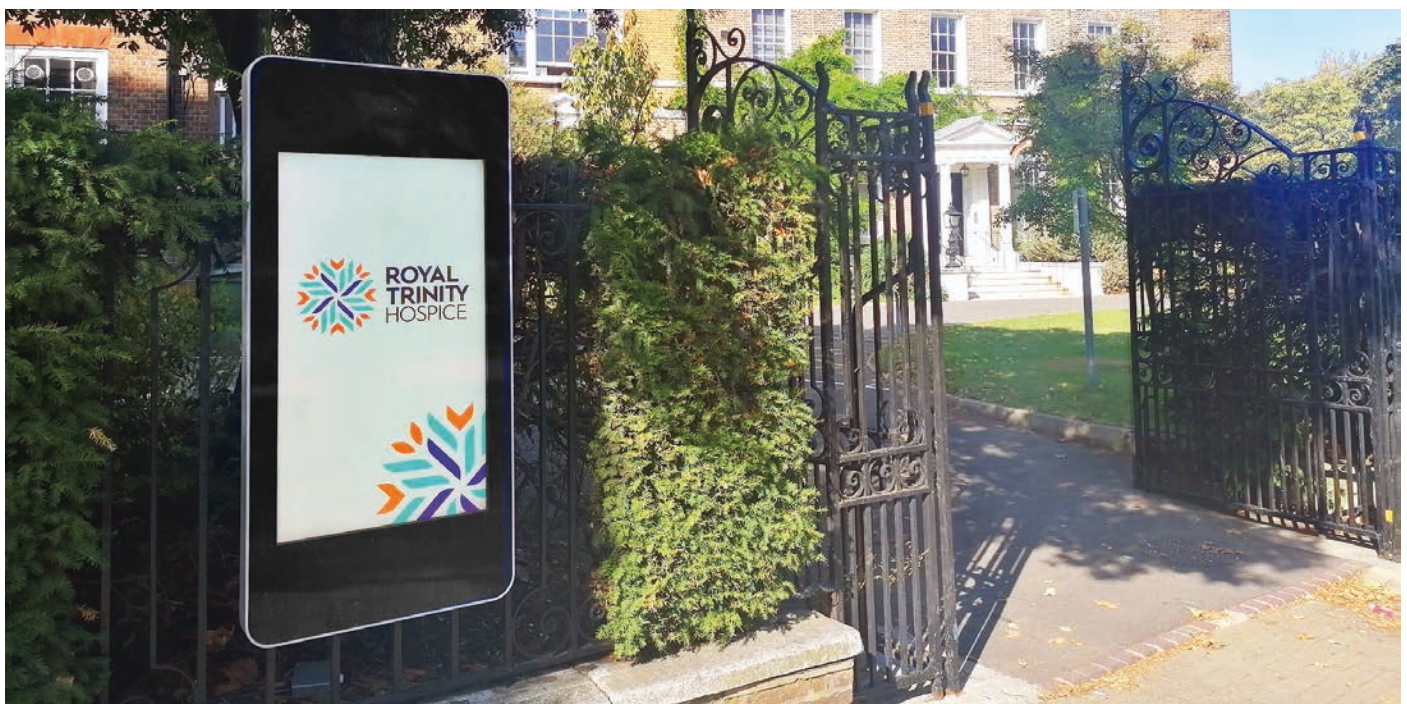

If you require any further information  
please contact us:

0370 334 1598 (local call rate)  
studio@thenewfat.co.uk

[thenewfat.co.uk](http://thenewfat.co.uk)



the new fat

