

Outdoor PCAP Freestanding Multi Touch Screen Posters

49" | 55" | 65"



PCAP Touch Screen

State-of-the-art projected capacitive technology provides the most responsive and sensitive touch experience available, as well as offering superior optical quality. Unlike other touch technologies, PCAP is not affected by dust or debris on the surface of the screen.



Vandal Proof

With a 2mm thick mild steel enclosure and 5mm thermally-toughened glass front, these IK10 rated displays are designed to withstand damage that may occur in public spaces. To avoid tampering, controls and inputs are hidden and cannot be accessed by passers-by.

IK10

Impact Resistance
10 Protected against 20 joules of impact



2mm Steel Enclosure
 5mm Tough Glass



Sunlight Readable



Weatherproof



No Ghost Touch



Advanced Temperature Control System



Ambient Light Sensor



Anti-Reflective Glass



Internal Locker



24/7 Usage



Android Media Player



Customisation Available

Other Features

Direct Sunlight Readable

Thanks to their commercial grade ultra-high brightness panels (2,500cd/m²), these displays are up to 10 times brighter than a domestic TV and so are easily readable even in direct sunlight.



Weatherproof

Designed to withstand the elements, these displays are protected against all wet weather conditions and airborne dust particles by their robust IP65 rated enclosure. They also feature a waterproof coating on all internal circuit boards and waterproof over-moulded AV connectors.

IP65

- Dust Resistance**
6 Protected against dust that may harm equipment.
- Water Resistance**
5 Protected against water spray from all directions.



No Ghost Touch

The electrodes that control the interactivity are sandwiched between two layers of special protective glass to prevent phantom touches. This ensures ultimate accuracy and a seamless touch experience.



Easy Maintenance

These displays use hydraulic cylinders to allow easy front access to the internal components, ensuring that maintenance is simple and straightforward.



Internal Locker

Should you need run the screen from an external source, there is space to fit a small PC or media player inside the lockable compartment. This can then be connected to the display via the HDMI, VGA or 3.5mm audio inputs.



Advanced Temperature Control System

To maximise the lifespan of the display, the internal airflow system keeps the screen running at the optimal temperature regardless of the external conditions. Built-in air conditioning can be tailored to allow the display to work in any climate.



Anti-Reflective Glass

The front glass face is specially treated to help diffuse direct sunlight, making the display easily readable even in bright weather conditions.



Ultimate UV Protection

The front glass of the display utilises a special UV treatment that reduces the internal heat of the enclosure by up to 71%; reducing the number of cooling fans needed and increasing the life of your display.



Key Features



PCAP TOUCH SCREEN



2,500 CD/M²
SUNLIGHT READABLE



IK10 RATED



IP65 RATED



2MM THICK
STEEL ENCLOSURE



REMOVABLE BASE



10 TOUCH POINTS



ANDROID MEDIA PLAYER



WEATHERPROOF

AMBIENT LIGHT SENSOR


EASY MAINTENANCE

CUSTOMISATION AVAILABLE

Specification Table

		49 Inch	55 Inch	65 Inch
Panel	Resolution	1080x1920		3840x2160
	Display Area (mm)	1079.8x610	1209.4x680.2	1428.5x803.5
	Aspect Ratio	16:9		
	Brightness (cd/m ²)	2,500		
	Colour	1.06 B	1.073 G	
	Viewing Angle	178°		
	Contrast Ratio	8000:1		
Touch	Touch Technology	Projected Capacitive		
	Touch Points	10		
	Glass Hardness	7H Minimum		
AV Inputs	Video	HDMI, VGA		
Power	Power Consumption (W)	300	430	680
	Input Voltage	AC110~240V (50Hz~60Hz)		
Mechanical	Unit Size (WxHxD mm)	1950x870x182	2032.5x960x203	2235.3x1086x245
	Package Size (WxHxD mm)	2070x1050x400	2130x1100x400	2350x1350x410
	Footprint (WxHxD mm)	890x500	990x500	1116x550
	Net Weight (kg)	186	224	260
	Gross Weight (kg)	216	256	340
	IK Rating	IK10		
Environmental	Operating Temperature:	-20 °C to 50 °C		
	Operating Humidity:	10% - 80%		
	Storage Temperature:	-30°C - 60°C		
	Storage Humidity:	5% - 90%		
	Enclosure Protection	IP65		
Computer	Media Formats	Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG)		
	Media Resolution	1920x1080/1080x1920/1080x1920		
	Internal Memory	6GB		
	CPU	Quad-Core Cortex-A17@1.61GHz		
	GPU	Mali-T760 MP4 @600MHz		
	RAM	2GB DDR3		
	Internal Storage	8GB NAND		
	USB	USB2.0 HOST (x2)		
	LAN	10/100M Ethernet		
	Wi-Fi	802.11b/g/n/ac		
	OS	Android 5.1.1		
	Graphic Engine	OpenGL ES 1.1/2.0/3.0/3.1, OpenCL 1.1, Renderscript, Direct3D 11.1		
Accessories	Included	AC Power Cable, Remote Control		
	Optional	Network Upgrade, Camera		
Warranty	Warranty Period	3 Year Warranty		
	Technical Support	Lifetime		

Errors and omissions excepted

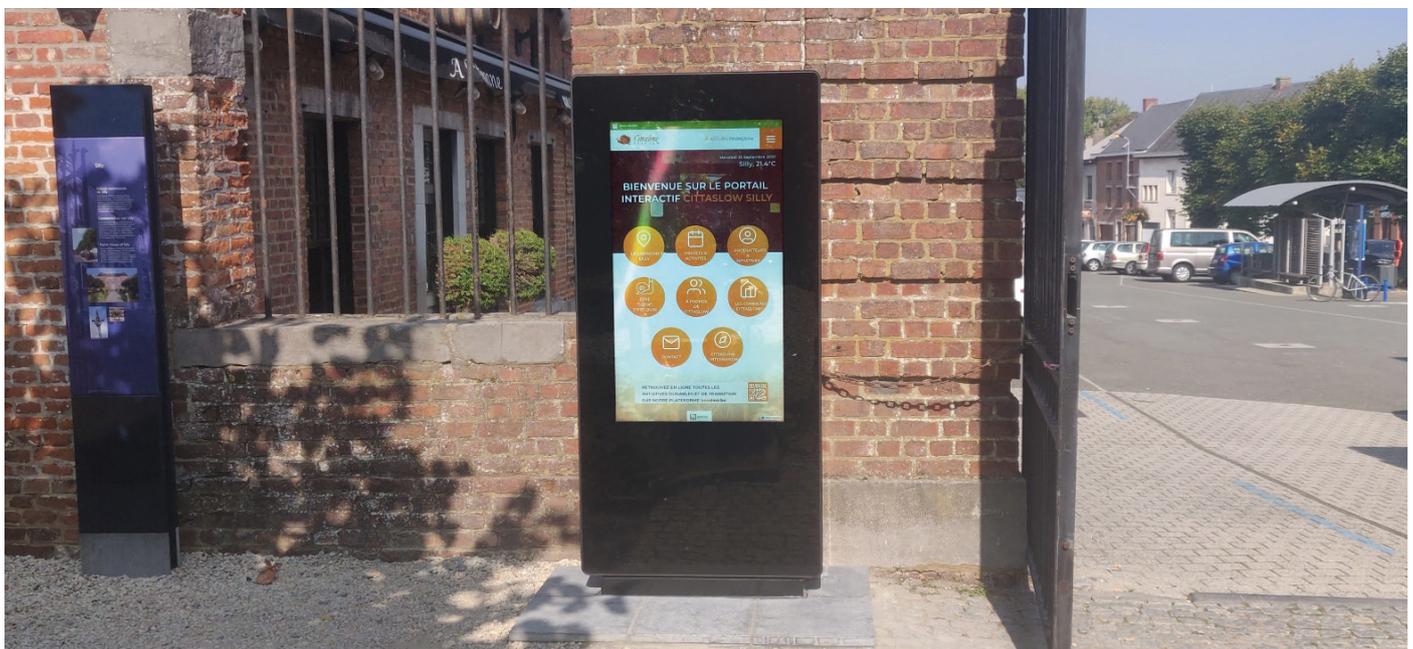

If you require any further information
please contact us:

0370 334 1598 (local call rate)
studio@thenewfat.co.uk

thenewfat.co.uk



the new fat

