

RAISED ACCESS FLOOR SYSTEM

PSA

To view product details




Tested in accordance with PSA MOB PF2 PS/SPU for raised access floors.

FDEB_H

HEAVY GRADE

For: Data centre and server room use

Panel comprises of a galvanised steel top and bottom sheet that are bonded to the core. A resilient surface is applied to the top and the panel is finished with a full edge banding.

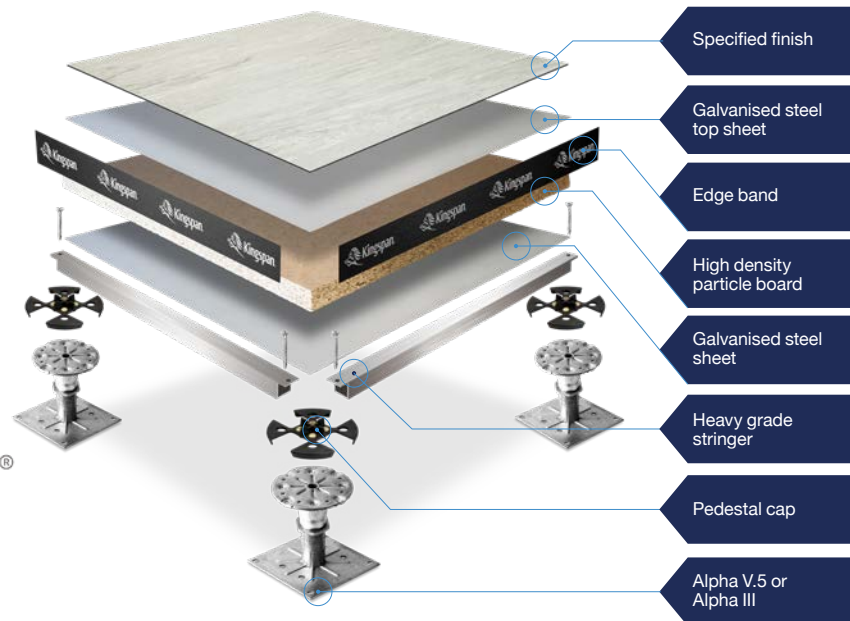

Panels	
Thickness:	40mm** Nominal
Weight:	52kg/m ² Nominal
Panel Size:	600mm x 600mm [†]
Core Material:	38mm high density particle board
Edgeband:	ABS
Category:	Loose lay

System Performance	
Point load 25 x 25mm:	4.5kN
Uniformly Distributed Load (UDL):	12kN/m ²

Panel Fire Performance	
Fire Class:	BS476-6:1989 & BS476-7:1997 Class 0
Reaction:	EN13501-1:2018 Bfl-s1
Resistance:	EN13501-2:2016 REI60r [^]

System Sound Performance	
Airborne Insulation $D_{n,f,w} (C;C_{tr})$:	47 dB
Impact Insulation $L_{n,f,w} (C)$:	65 dB

[†] 600 x 900mm medium/heavy grade panels available for perimeter detailing.

* Pivot-head adaptors and Nickel plated pedestals available upon request.

§ Warranty only valid when a full Tate system including panels and understructure is installed. Excludes covering, please refer to original manufacturers information.


** Without surface covering.

[^] Alpha V.5 up to 570mm, Alpha III up to 990mm.

- All working loads perform to a 3x safety factor.
- Void heights from 30mm to 1200mm are available using standard pedestals. For heights outside of this range alternative pedestals are available.
- Structural performance based upon a full Tate system i.e. panels & pedestals.

Pedestal Options

Steel pedestals* coated with a clear passivation.



Pedestal Adhesive:

Standard or Acoustic pedestal adhesives available.

Stringers

A heavy grade screw down stringer system is required to achieve the Heavy PSA rating.

Underfloor Plenum

This system can be supplied with neoprene gaskets to minimise air loss through the raised floor surface from the underfloor plenum to aid air circulation, distribution and management.

Surface Finishes

A wide variety of surface finishes can be bonded to the top surface of the panel including HPL, Vinyl, Rubber, Linoleum & Marmoleum.

Tate BIM 360



To access our BIM drawings scan here and register. Existing customers can access up to date content directly through their BIM360 account.



Tate

Burma Drive, Hull, HU9 5SG, United Kingdom
T: +44 (0)1482 781701 E: hello.uk@tateglobal.com W: tateglobal.com

© 2024 Tate. We reserve the right to change specification or design and supply products which may differ from those described and illustrated without notice and without liability.
tate-fdeb-h-product-data-sheet-en-gb-ie-v13



#planetpassionate