



Europed

Europed fully complies with the requirements of BSEN 12825 specification.



Dimensions

Height range:	16 - 347mm
Base:	80mm

Alpha V / Alpha V.5

Alpha V Pedestal fully complies with light, medium and heavy grade requirements of the PSA MOB PF2 PS/SPU specification.

Alpha V.5 has a 5mm thick head plate.




Dimensions

Height range:	20 - 620mm
Base:	100mm

Alpha III

Alpha III Pedestal fully complies with heavy and extra heavy grade requirements of the PSA MOB PF2 PS/SPU specification.

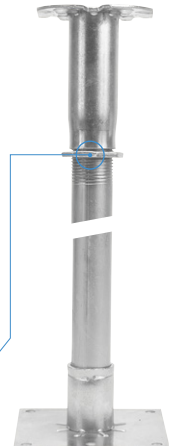


Height adjustment:
+/- 40mm

Dimensions

Height range:	=/> 250mm
Base:	120mm

Pedestal Usage Guide

	Europed	Alpha V	Alpha V.5	Alpha III	Stringer
RG Series PSA		●		●	>600mm
RG Series BSEN	●	●		●	>600mm
TL PSA		●		●	
TL BSEN	●	●		●	
FDEB_M PSA			●	●	>450mm
FDEB_H PSA			●	●	All heights
FDEB BSEN	●	●		●	>450mm

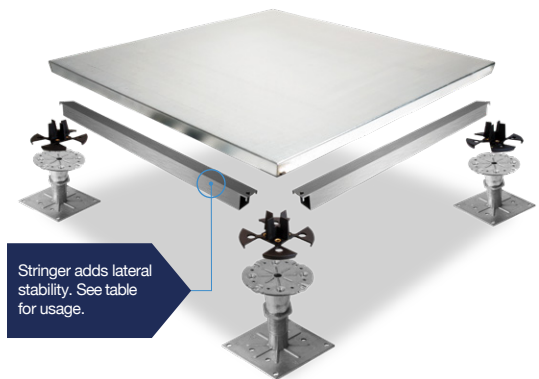

Stringer adds lateral stability. See table for usage.

The pedestals are of a Zinc plated steel construction, ensuring electrical continuity, pre-assembled to help minimize installation time. The pedestals have a locking nut to ensure that once adjusted and locked there is no movement in the pedestal head.

The head of the pedestals is designed to accept a range of support stringers. The head caps have a 90mm diameter and provide positive panel location. Adjustment is a nominal +/-40mm; less on the lower void heights, with the range of floor heights ranging from 50mm to 2000mm.

When considering a pedestal, a height allowance must be made for cap thickness and adhesive layer; in general an allowance of 5mm should be made.

See specific panel datasheet for more information

- Where a stringer is recommended for system heights $\geq 450\text{mm}$ and $\geq 600\text{mm}$ the light clip on stringer is provided only to aid stability at installation; it is not a requirement to achieve system load rating.
- For FDEB_H the structural stringer must be employed at all heights.
- For Extra Heavy rating the 30x50x2mm Extended stringer must be employed with the correct version of the Alpha 3 pedestal.
- Nickel plated versions are available to special order.
- For applications not covered by this data sheet please contact: hello.uk@tateglobal.com or call +44 (0) 1482 781701