



BIM SUPPORT



SAFETY



SECURITY



Punched Security Caging & Mesh Walls

Tate Secure are modern security caging and mesh wall solutions with a light, flexible design to offer greater security and to subdivide areas within data centres. The Tate Secure range is available in three panel types, Welded, Punched and Woven.

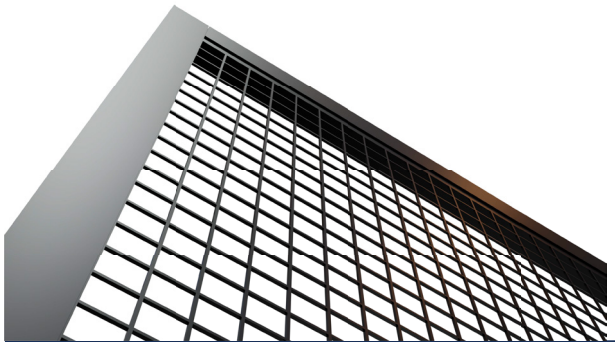
Tate Secure Punched is flexible and reconfigurable to scale to your future requirements, available in various heights and widths. The cross sections and openings on the panels enable air to circulate easily throughout the data hall.

The punched panels are folded at the end to create a 30 x 30mm angle as standard for extra stability and strength. This design allows them to be fixed to security posts using structural fixings or optional tamper proof screws.

The panels are available in a painted mild steel finish as standard and can also have a painted finish in white, grey or black.

Core Features	
Specifications - 25 x 25 x 3mm	
	
Weight:	4.9kg/m2
Height:	2400mm standard
Thickness:	3mm
Open Area:	79% Open
Frame:	Integral folded 30mm frame
Specifications - 10 x 10 x 3mm	
	
Weight:	9.8kg/m2
Height:	2400mm standard
Thickness:	3mm
Open Area:	59% Open
Frame:	Integral folded 30mm frame
Finish Options	
Punched Mesh & Frame	Painted White, Grey or Black Customisation Available
Components	
Punched Mesh:	Powder Coated Mesh Panels

Securing Post	50x50x3mm Mild Steel Painted Black
---------------	------------------------------------



Securing Post Features:

Pilot Holes:	Pilot holes pre-drilled for quick installation of mesh using self tapping screws.	
Multi-Directional:	Pilot holes on all 4 sides of post allow for security mesh to be mounted on any scale.	
Base Plate:	U-Bracket is anchored to slab, reducing trip hazard potential.	

Key Benefits

- Subdivide areas within the data hall.
- Maintain airflow throughout the data hall.
- Flexible, configurable and quick to install.
- Provide safety to personnel when working near data servers and fan walls.
- BIM coordinated by the Tate team to minimise snags and dashing during construction.

E: info@tateglobal.com
T: +353 (0)1 6856518
tateglobal.com



Please note we reserve the right to change specification or design and supply products which may differ from those described and illustrated without notice and without liability.

