

PV 流量比例閥組



Proportional Flow Control Valve


日泰展業有限公司
Ritai Enterprise Co., Ltd.



產品規格 Specifications

| 型號 Model | PV300-MM2 | PV300-MM3 | PV300-MM5 |
|----------------------------------|---|-----------|-----------|
| 閥門類型 Valve Type | 兩口兩位比例式針閥 2-Way Proportional Needle valves | | |
| 口徑 Port Size | Inlet : G3/8" ; Outlet : G 1/4" | | |
| 流體 Medium | 真空、惰性氣體、油、水...等液體 Vacuum, Compatible gases, oil, water and liquids | | |
| 壓力範圍 Pressure Range | -1~7bar | | |
| 流量範圍(空氣)Flow Range of air | 0~400L/min@6bar | | |
| 流量範圍(水)Flow Range of water | 0~8L/min@6bar | | |
| 重覆精度 Repeatability | ±0.1% F.S. | | |
| 流量分辨率(空氣)Flow Resolution of air | 0.3 L/min@3bar | | |
| 流量分辨率(水)Flow Resolution of water | 0.008L/min@3bar | | |
| 溫度範圍 Temperature Range | -20 ~84° C | | |
| 開關時間(全開到全關)Full stroke time | 2 sec | | |
| 本體材質 Body material | 鋁合金 Aluminum | | |
| 密封件 Seals | 本體-鋁合金:全 VITON 或 VITON+EPDM Body- Aluminum : All VITON or VITON+EPDM ----- **若用於真空或水·建議搭配 EPDM | | |
| 防護等級 Ingress Protection | IP 52 | | |

外觀尺寸 Dimensions

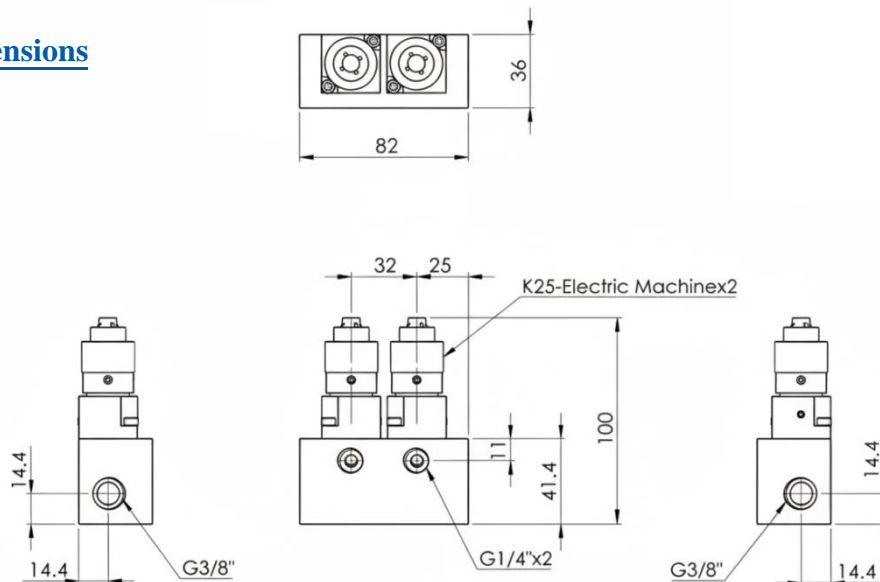

- PV300-MM2 -

