

MODEL **S50** **S70**

Description:

- Ventilating fan should be ceiling or wall mounted and capable of exhausting air quietly and efficiently.
- The S50, S70 fan is HVI certified.
- Torsion mounting-no tools required

Housing

- Built-in mounting ears
- Made of rugged 26 GA galvanized steel
- Ceiling or wall installation
- Detachable 3 inch or 4 inch polymetic collar
- Housing size:7 1/4"x7 1/2"x3 5/8"

Motor/Blower

- Plug-in permanently lubricated motor for continuous operation
- Power rating should be 120 volts and 60 Hz
- Fan should be ETL and cETL listed for tub/shower when used with a GFCI branch circuit.
- Low RPM for quiet performance
- Motor comes with a built in overload disconnect for safety and longer motor life

Grille

- The grille is low profile that has elegance and still able to maintain its simplicity.
- Made of a rugged polymeric resin that's known for its long life durability

Typical specification

- Ceiling ventilator shall have corrosion resistance galvanized steel.
- It shall be ducted to a roof vent or wall cap using 3 inch or 4 inch round pipe.
- Blower assembly shall be removable,have a centrifugal type blower wheel and permanently
- lubricated motor designed for continuous operation
- Air and sound delivery shall meet the HVI certified rating as per the fan curves attached.



Optional
Fluorescent Light



Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

CERTIFICATIONS



MODEL S50 S70

Model Number	S50	S70
Static Pressure in inches w.g.	0.1	0.1
Air Volume (CFM)	50	70
Noise (sonse)	4.8	4.0
Fan Watts	45W	55W
Duct Diameter	3"	4"
Power Rating (V/Hz)	120/60	

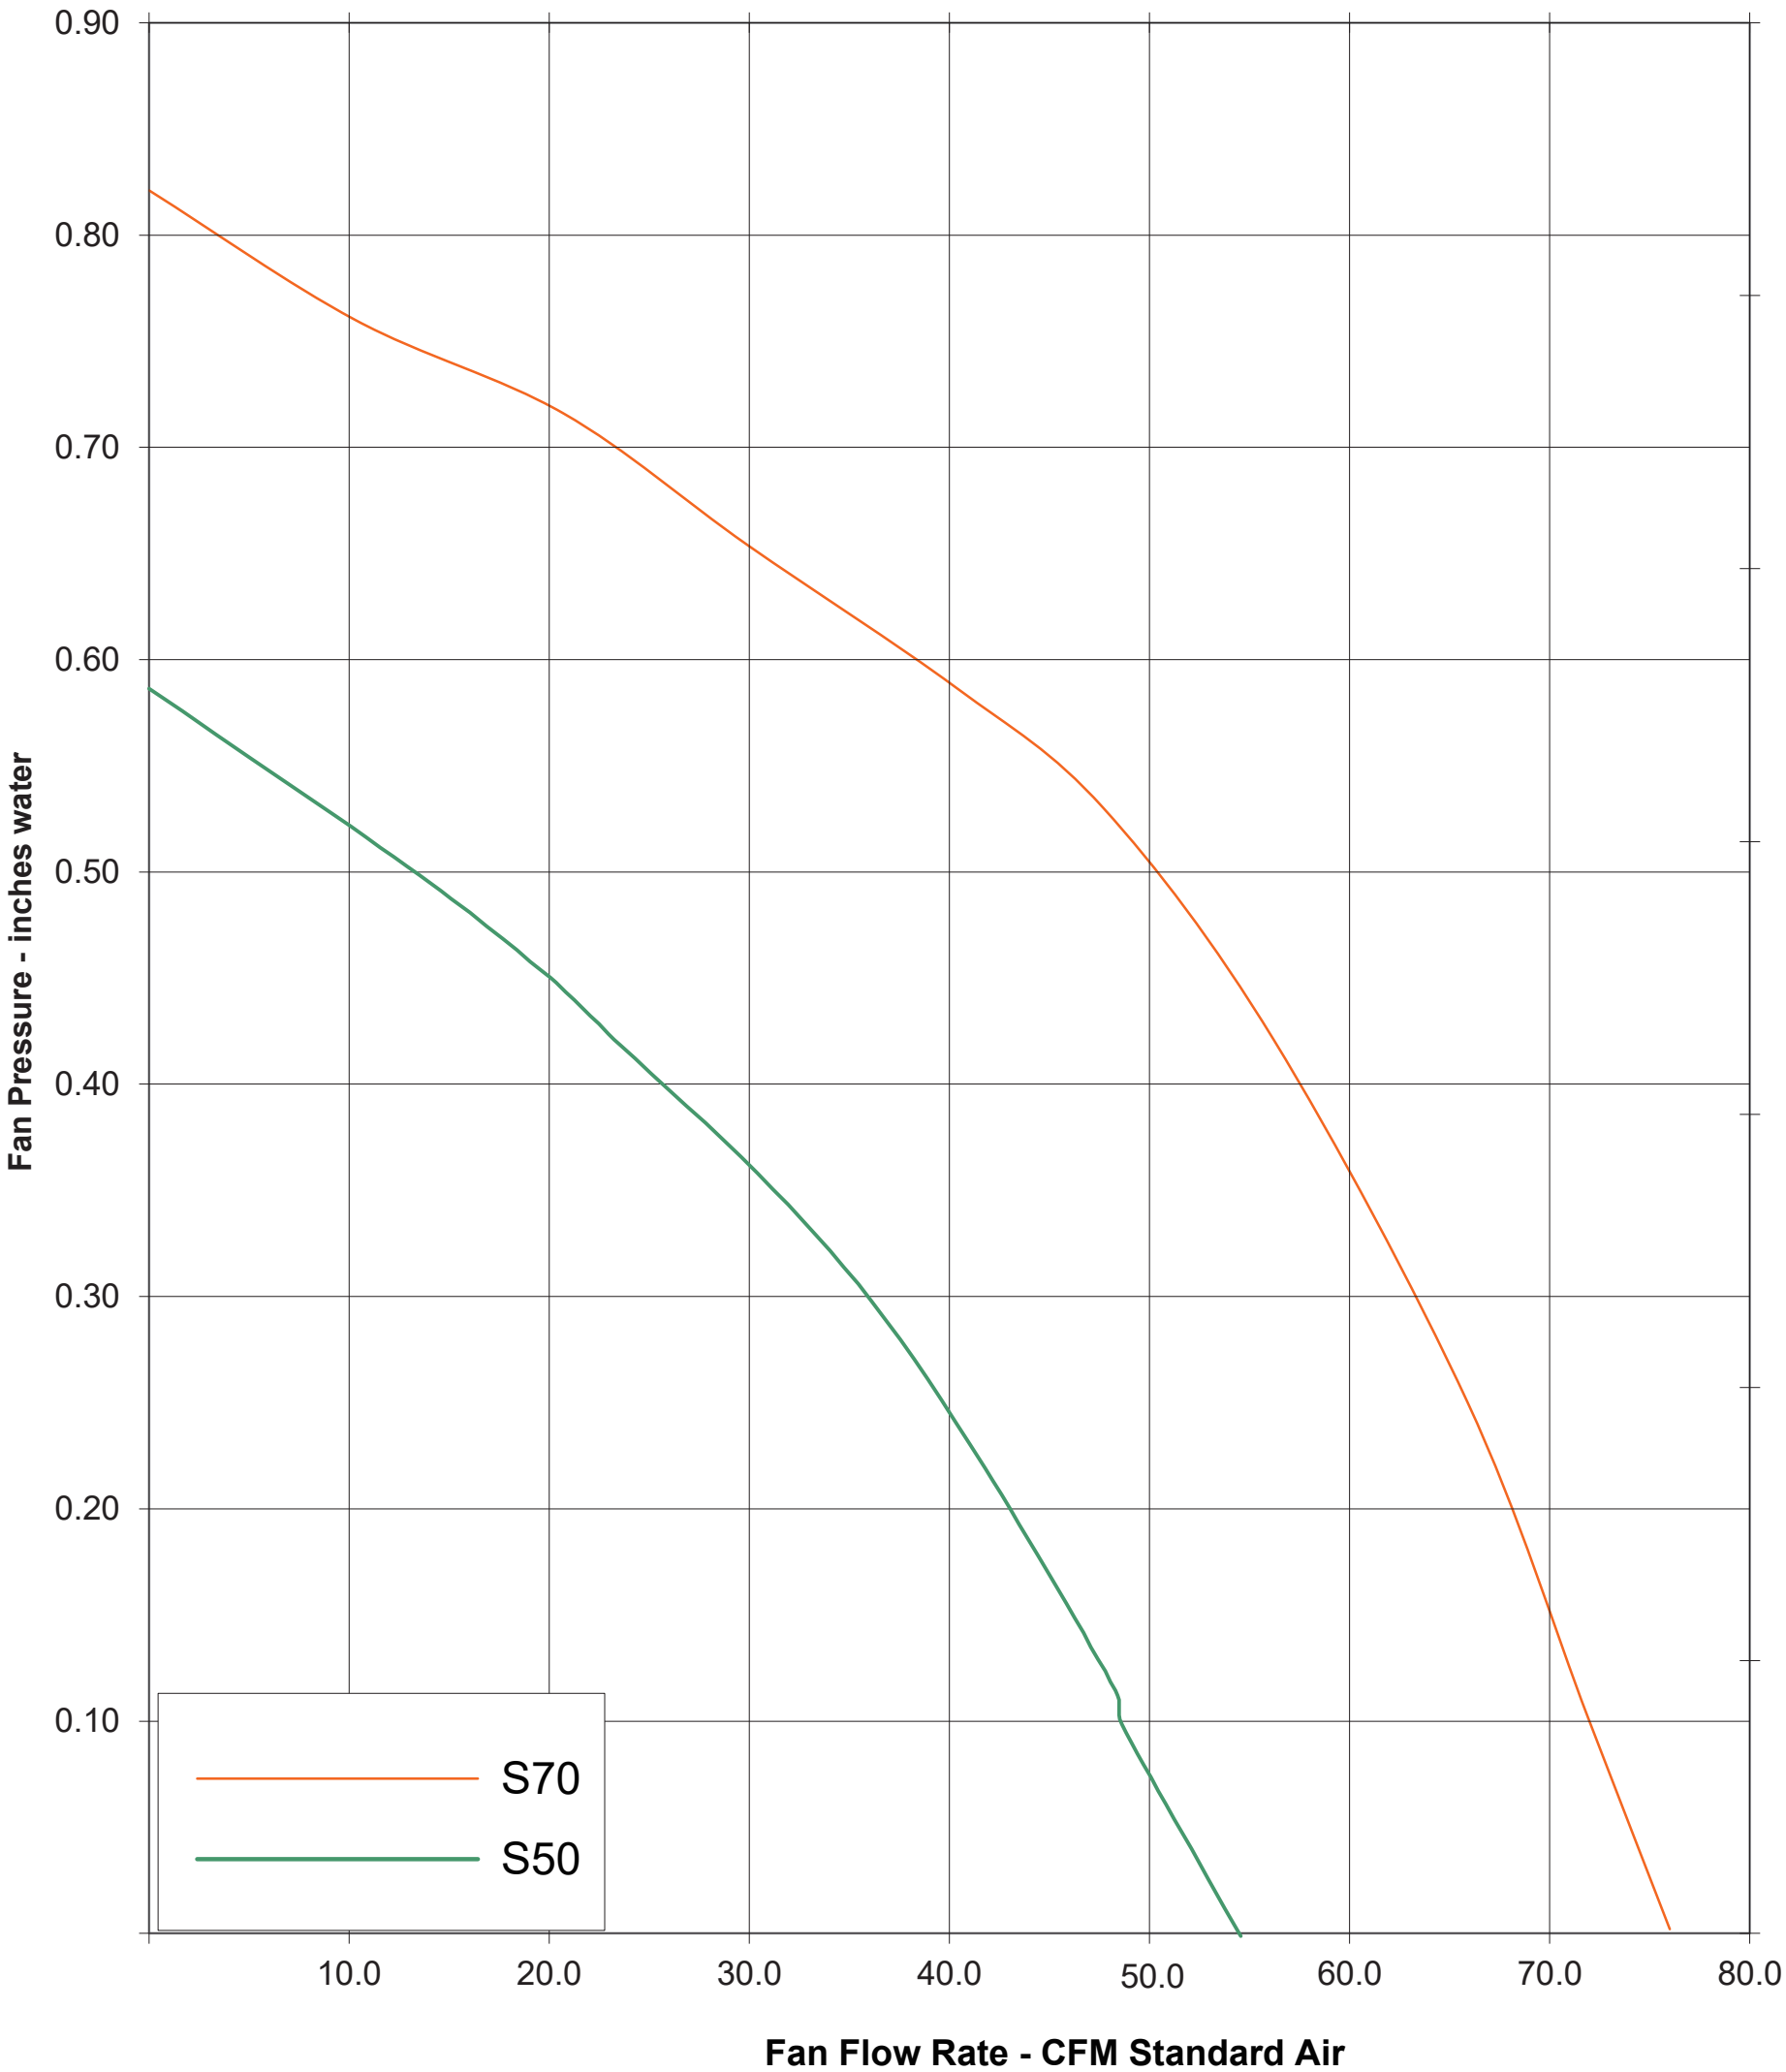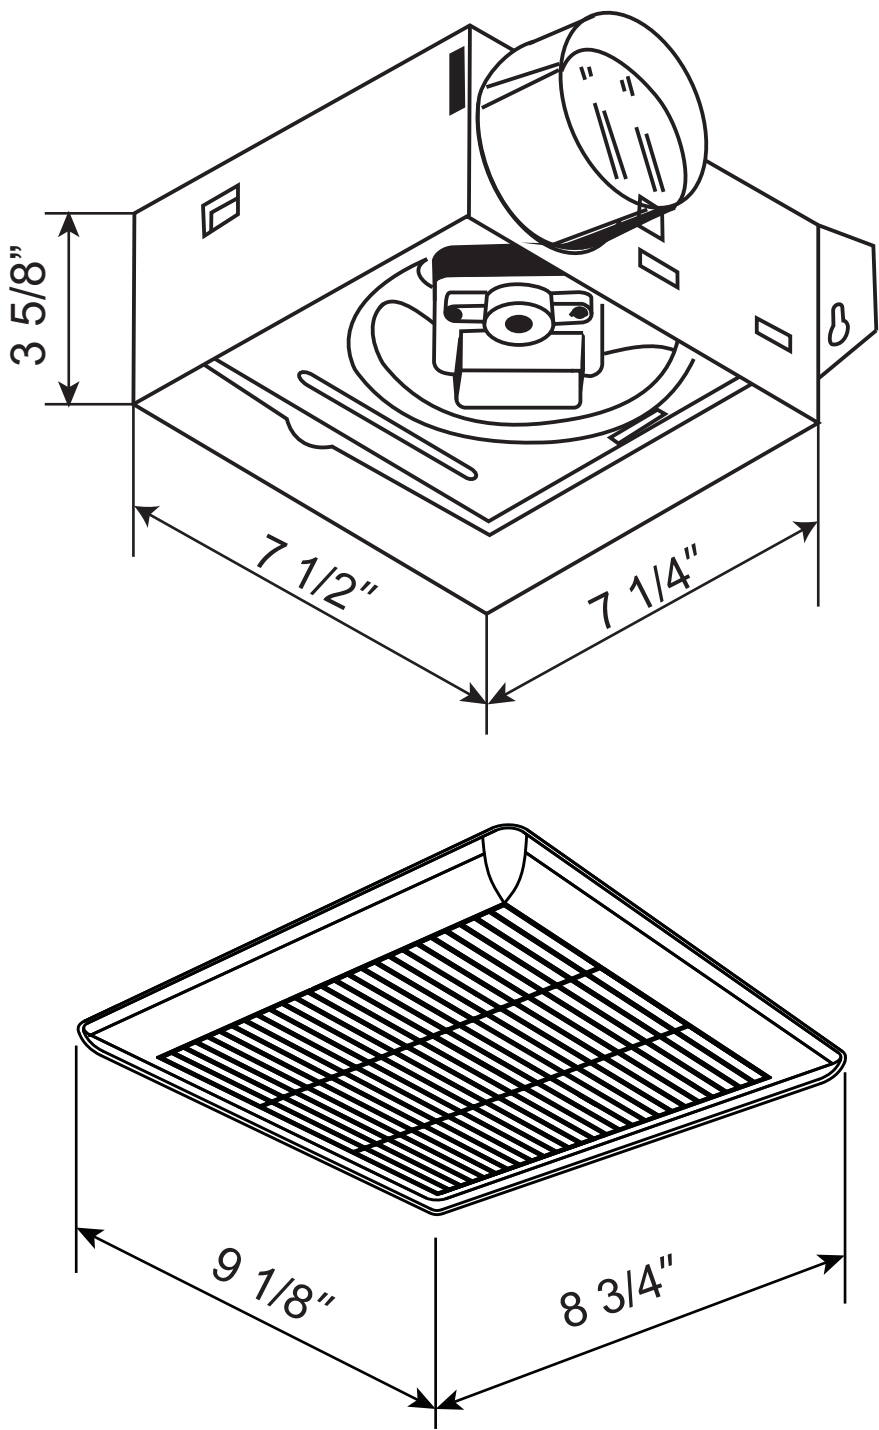

CERTIFICATIONS





MODEL SNP50 SNP80 SNP100

Ultra Silent, High Performance, Attractive Design Grille

Description

- Very quiet fan for ceiling or wall mounted Hold and ETL evaluation and confirm to UL and cUL safety standards. HVI and ENERGY STAR[®] certified.
- It comes with a capacitor start motor which is known for its high efficiency and long lasting reliability. It holds an ETL evaluation and conforms to UL and cUL safety standards.

Housing

- Made of rugged 26 GA galvanized steel
- Detachable 4 inch polymeric collar which includes a light weight built in back draft damper.
- Housing size: 8-1/2"x9"x5 3/4"

Motor/Blower

- Plug in permanently lubricated motor- Engineered for continuous operation.
- Power rating should be 120 volts and 60 Hz
- Motor comes with a built in overload disconnect for safety and longer motor life.

Grille

- The grille is low profile that has elegance and still able to maintain its simplicity.
- Grille dimension:11-13/16"x11-7/16".

Typical specification

- Ceiling ventilator shall have corrosion resistance galvanized steel.
- It shall be ducted to a roof vent or wall cap using 4 inch round pipe.
- Blower assembly shall be removable, have a centrifugal type blower wheel and a permanently lubricated motor designed for continuous operation.
- Includes an attachable non metallic collar with build in back draft damper.
- Air and sound delivery shall meet the ENERGY STAR, HVI certified ratings as per the fan curves attached.



Optional
LED Light
Humidity Sensor
Motion Sensor
Speed Controller



Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

CERTIFICATIONS



MODEL **SNP50** **SNP80** **SNP100**

Model Number	SNP50		SNP80		SNP100	
Static Pressure in inches w.g.	0.1	0.25	0.1	0.25	0.1	0.25
Air Volume (CFM)	50	37	80	60	100	97
Noise (sones)	0.4	N/A	0.3	N/A	0.8	N/A
Fan Watts	18W		19W		26W	
Duct Diameter	4"					
Power Rating(V/Hz)	120/60					

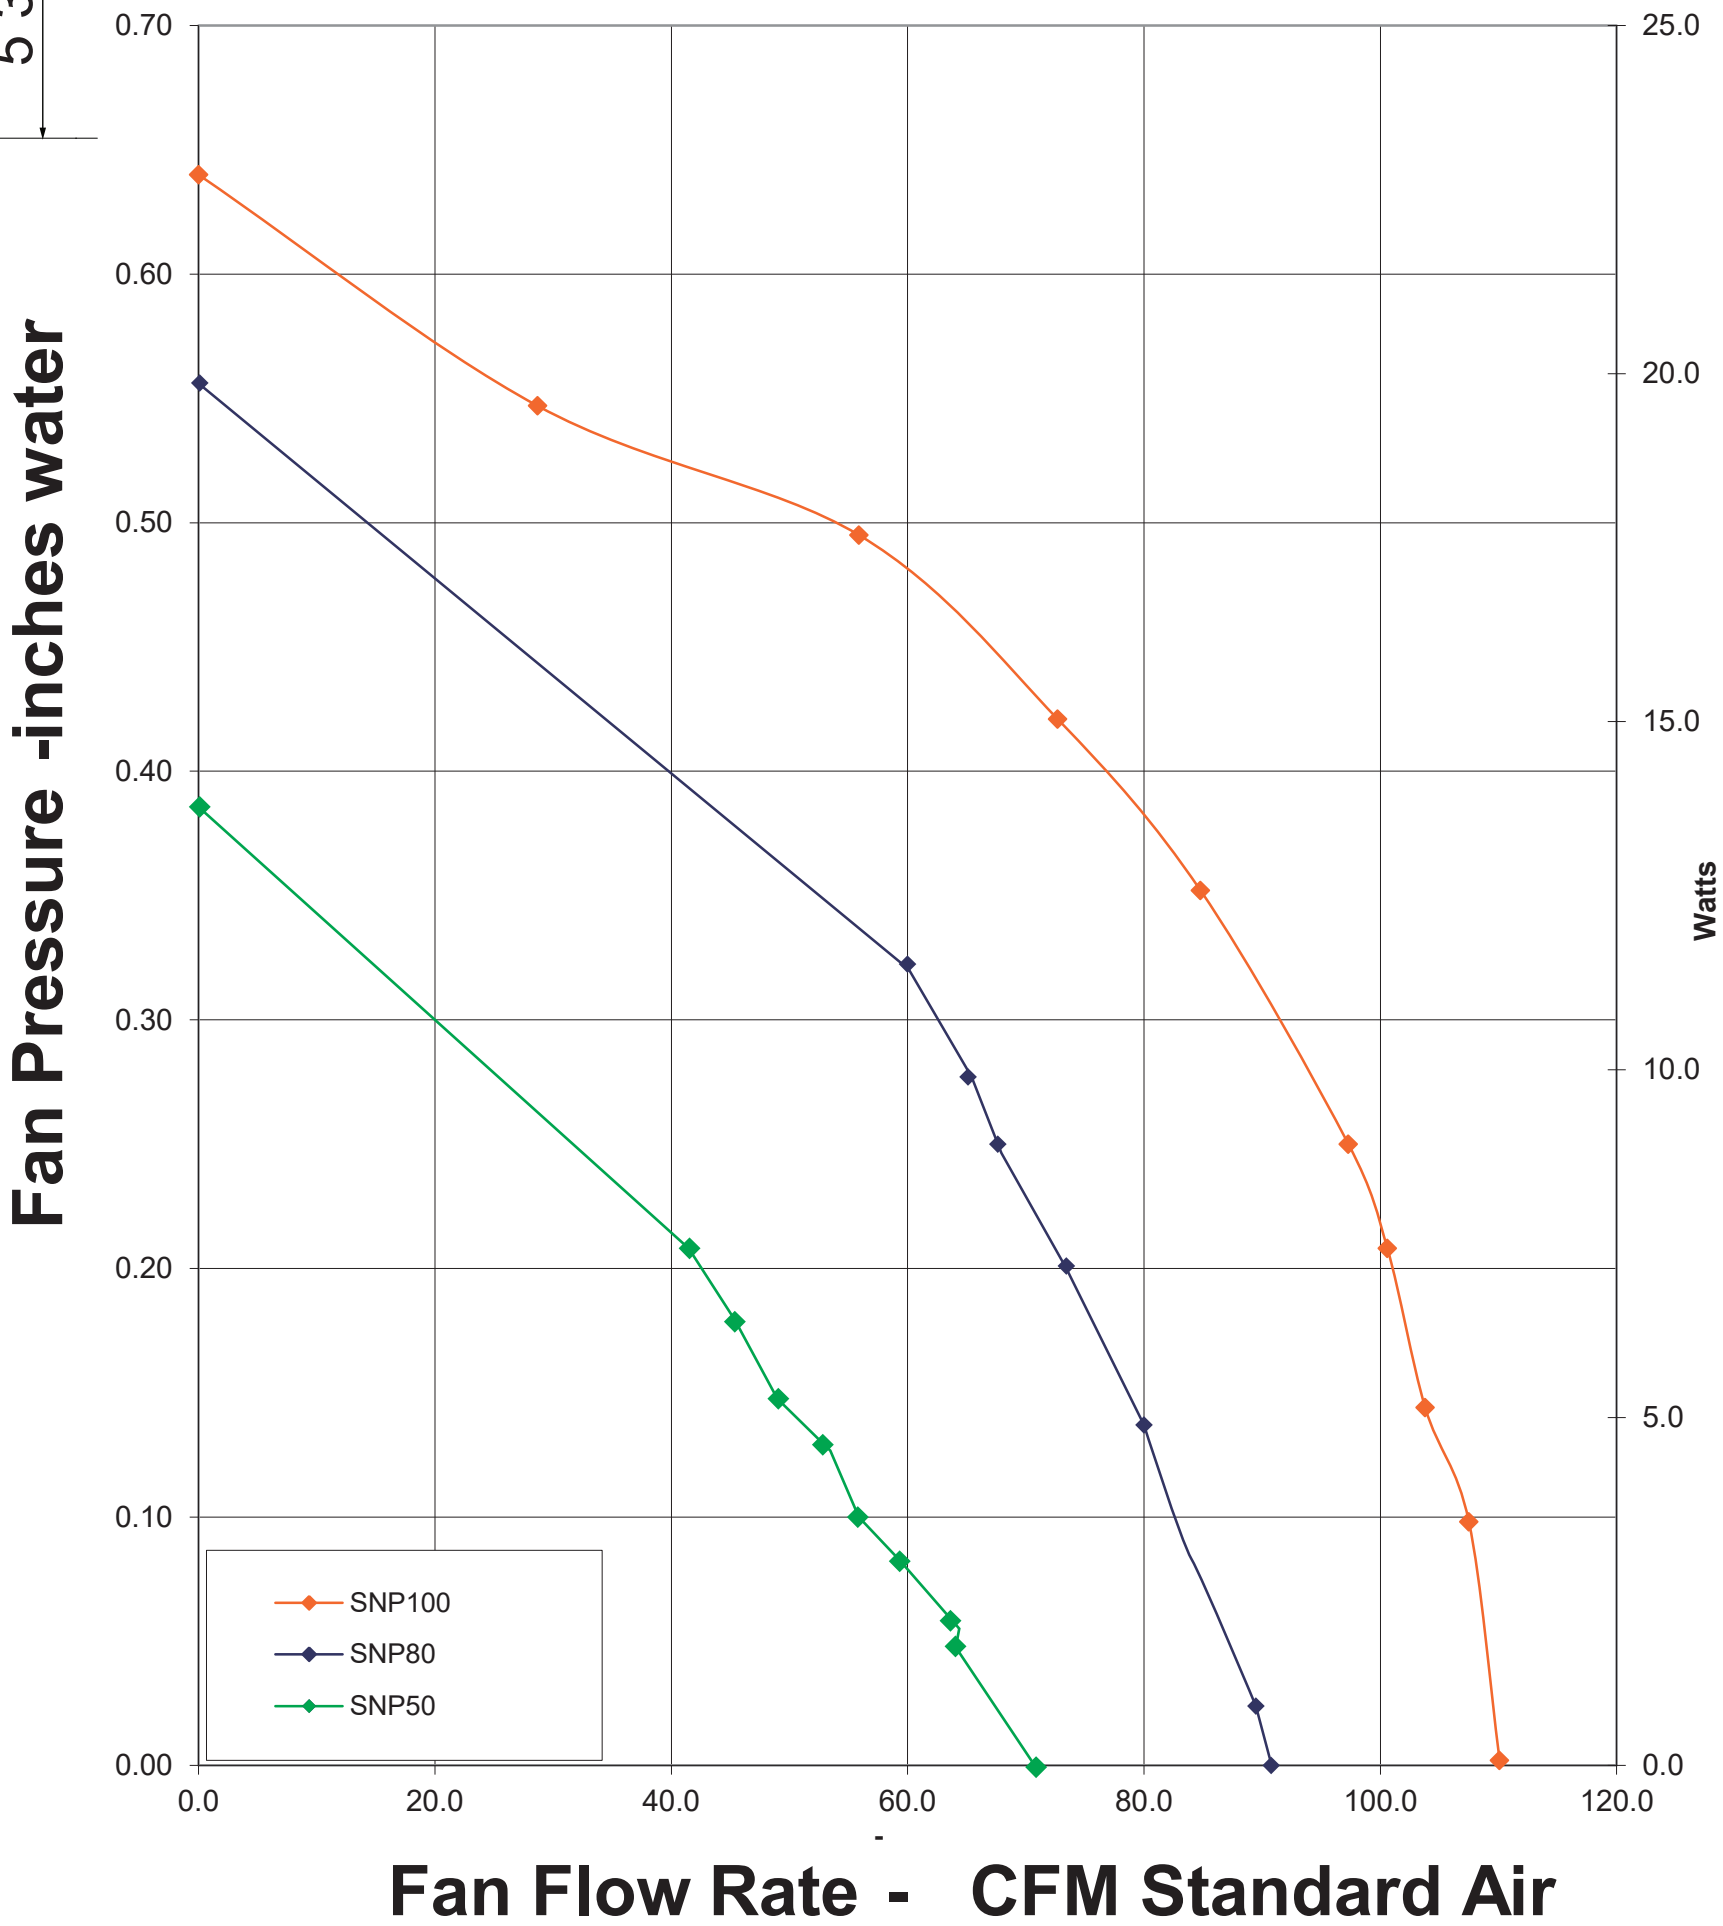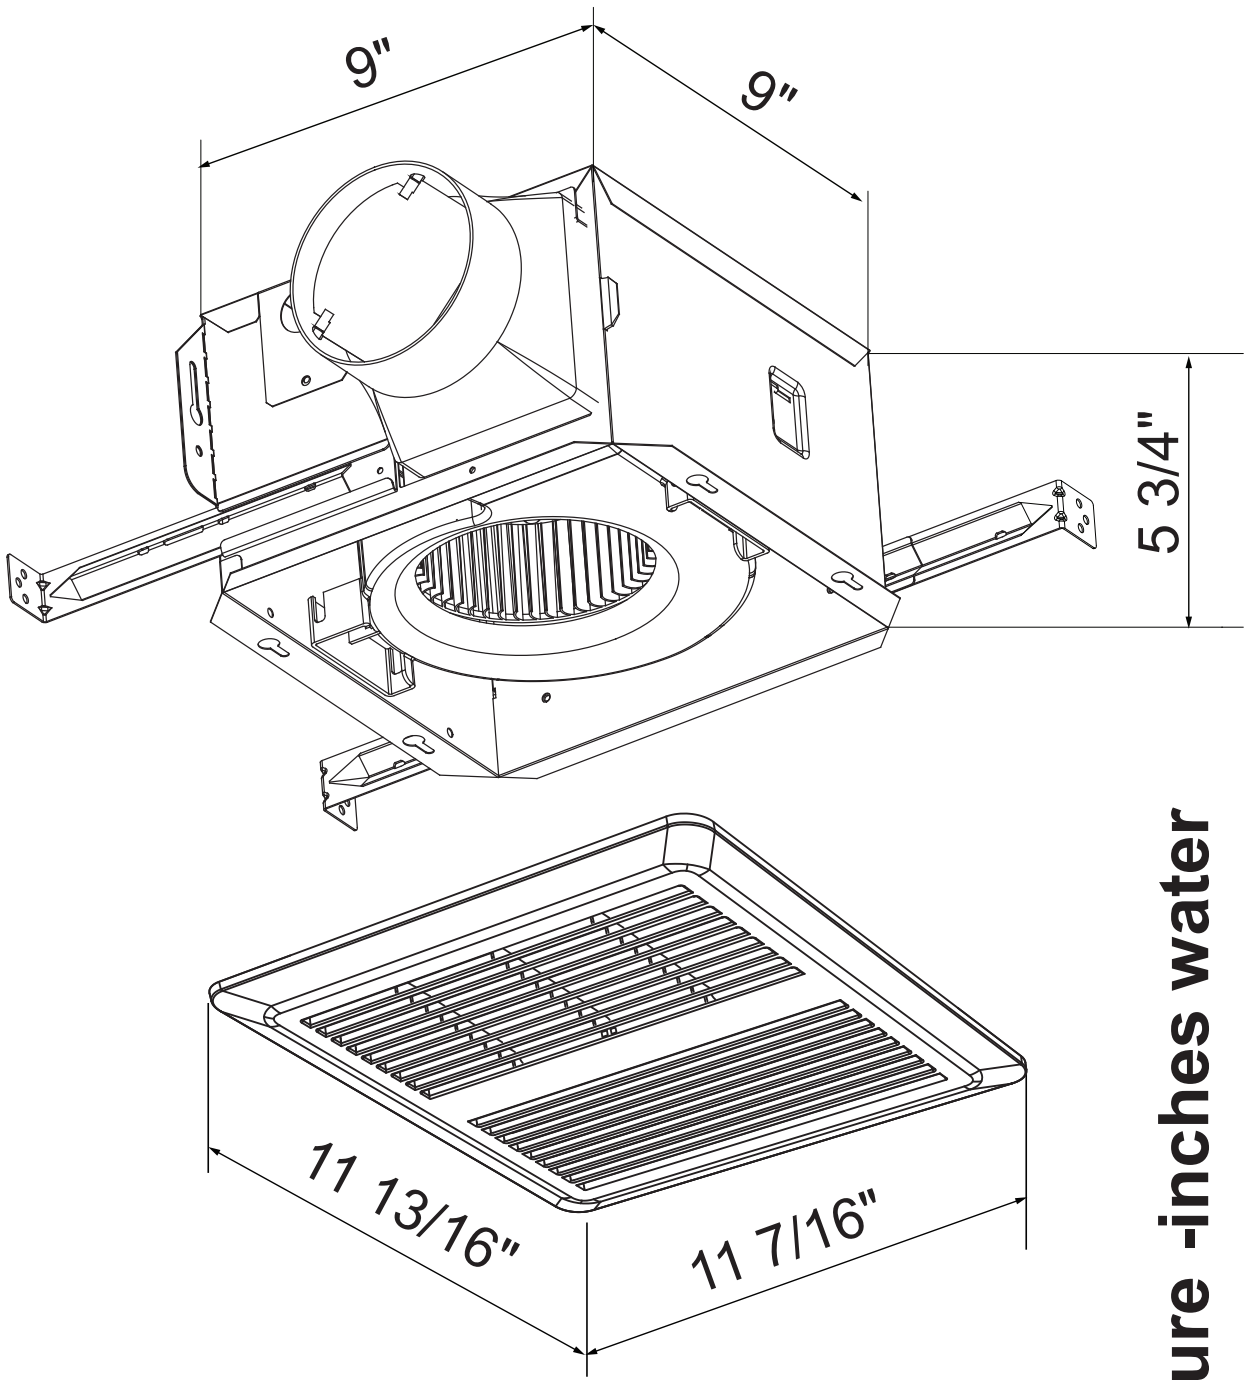

CERTIFICATIONS





MODELS SE80T SE110 SE120 SE150

Ultra Silent, High Performance, Attractive Design Grille
Description

Ventilating fan should be ceiling or wall mounted and capable of exhausting air quietly and efficiently. The SE series is HVI and ENERGY STAR certified.

It comes with a capacitor start motor which is known for its high efficiency and long lasting reliability. It holds an ETL evaluation and conforms to UL and cUL safety standards.

This fan has a unique plug and play concept that allows you to to add accessories such as motion sensor, humidistat, light, or even speed/controller without changing the fan.

Housing

Made of rugged 26 GA galvanized steel

Detachable 4 inch or 6 inch polymeric resin collar which includes a light weight built in back draft damper.

Double hanger bar mounting brackets that are adjustable up to 24 inch span allows for ideal positioning.

Motor/Blower

Plug in permanently lubricated motor- Engineered for continuous operation.

The motor is energy efficient and surpasses the minimum ENERGY STAR requirements for continuous duty operation.

Power rating should be 120 volts and 60 Hz

Fan shall be ETL and cETL listed for tub/shower enclosure when used with a GFCI branch circuit.

Motor comes with a built in overload disconnect for safety and longer motor life.

Our Premium series operates at lower RPM’s to give you quieter operation.

Grille

The Premium grille is low profile that has elegance and still able to maintain its simplicity.

Made of a rugged polymeric resin that’s known for its long life durability.

Comes with torsion spring clips that helps mount grille evenly.

Typical specification

Ceiling ventilator shall have corrosion resistance galvanized steel housing with 4 point mounting capability.

It shall be ducted to a roof vent or wall cap using 4 inch & 6 inch round pipe.

Blower assembly shall be removable, have a centrifugal type blower wheel and a permanently lubricated motor designed for continuous operation.

Air and sound delivery shall meet the HVI certified ratings as per the fan curves attached.

STERLING ventilators come with permanent split capacitor motor which improves efficiency this is why it has qualified to carry the ENERGY STAR label.



Optional
Humidistat
Motion Sensor
Speed controller
Metal Grille

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

CERTIFICATIONS









NEXT GENERATION
Ultimate fan solutions

SELECT SERIES
Specification Data


Model Number	SE80T		SE110		SE120		SE150	
Static Pressure in inches w.g.	0.1	0.25	0.1	0.25	0.1	0.25	0.1	0.25
Air Volume (CFM)	90	63	110	100	120	100	150	136
Noise (sones)	<0.3	0.4	0.6	0.8	0.9	1.0	1.1	1.4
Fan Watts	25W		33W		33W		45W	
Duct Diameter	6"		6"		6"		6"	
Power Rating (V/Hz)	120/60							

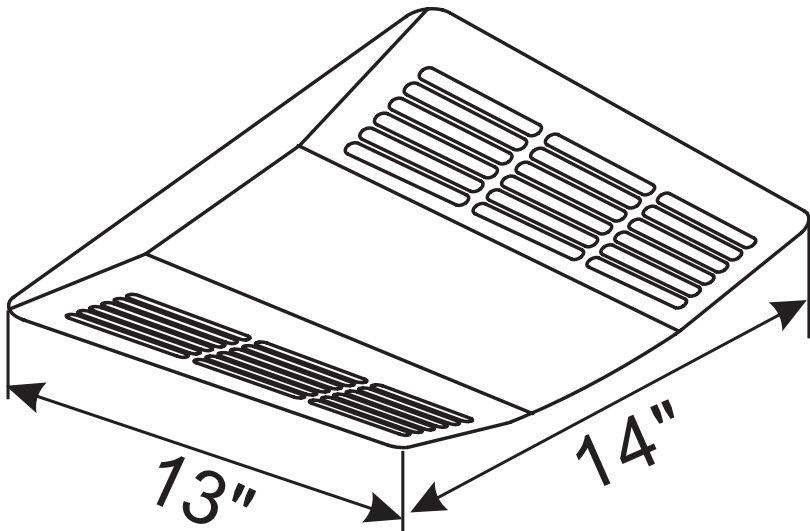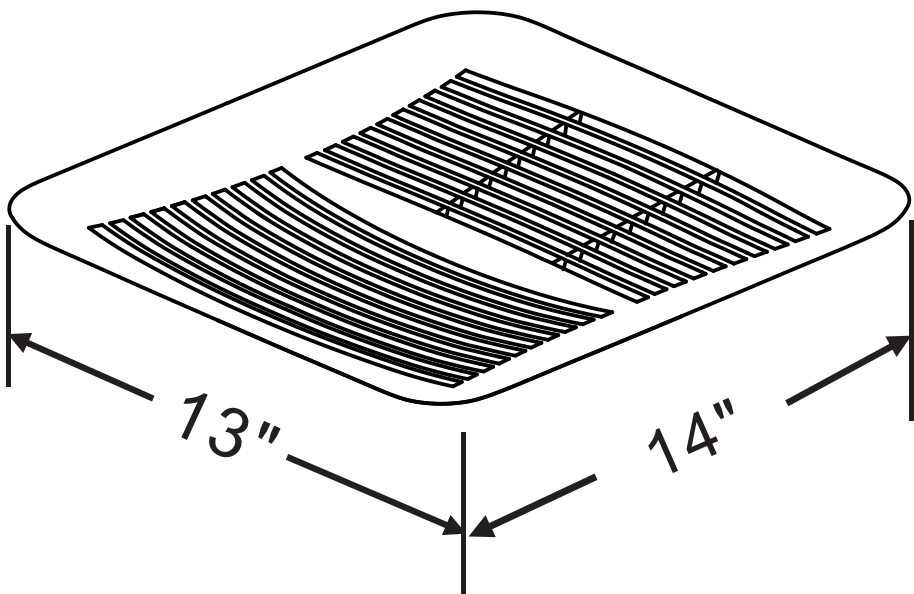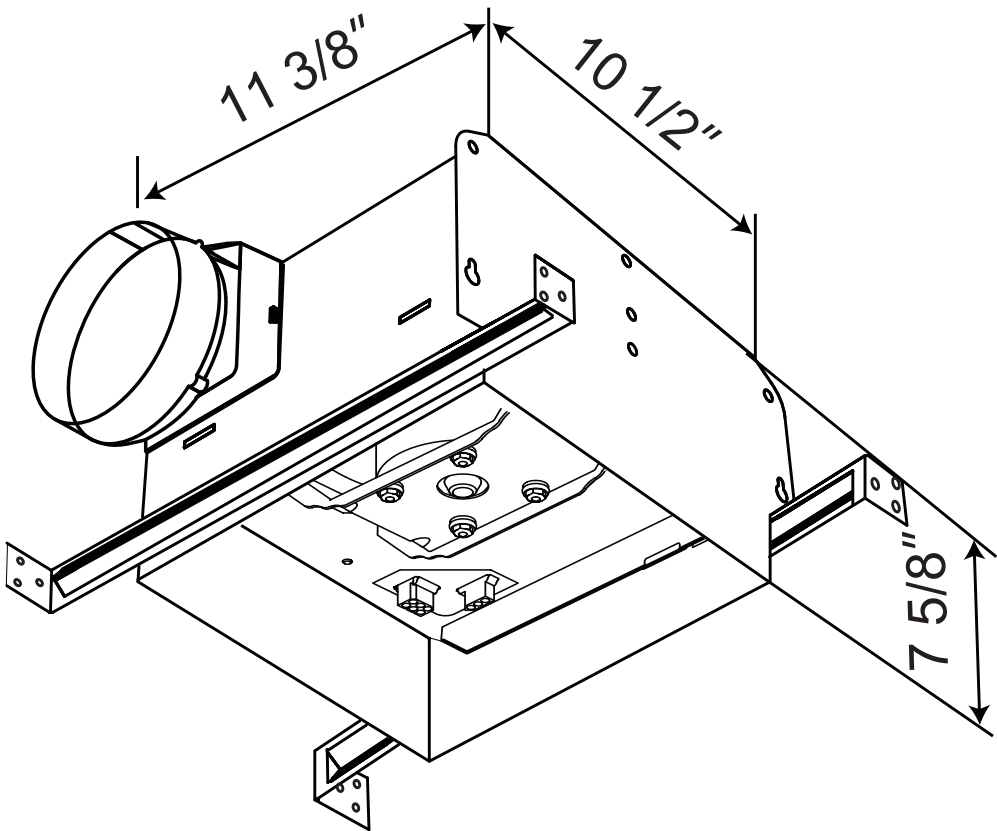


OPTIONAL METAL GRILLE

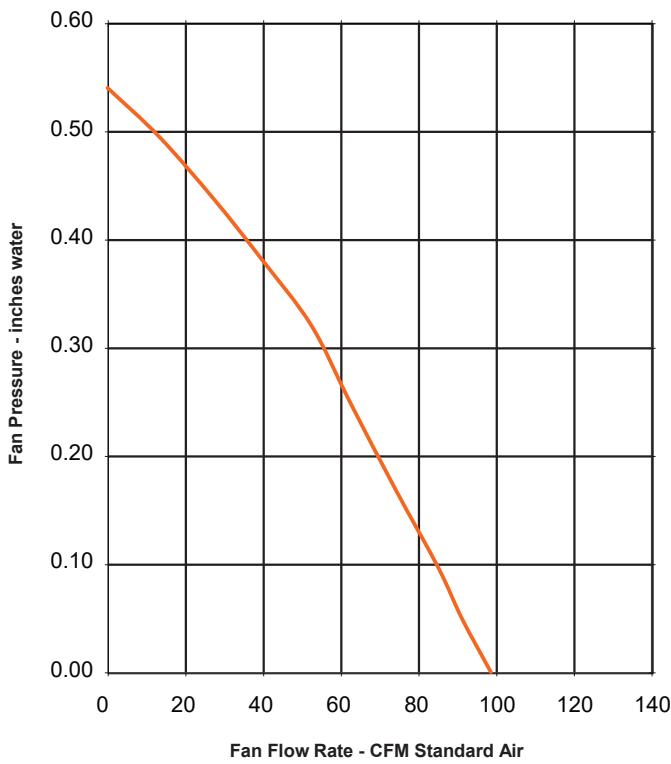


SE80T

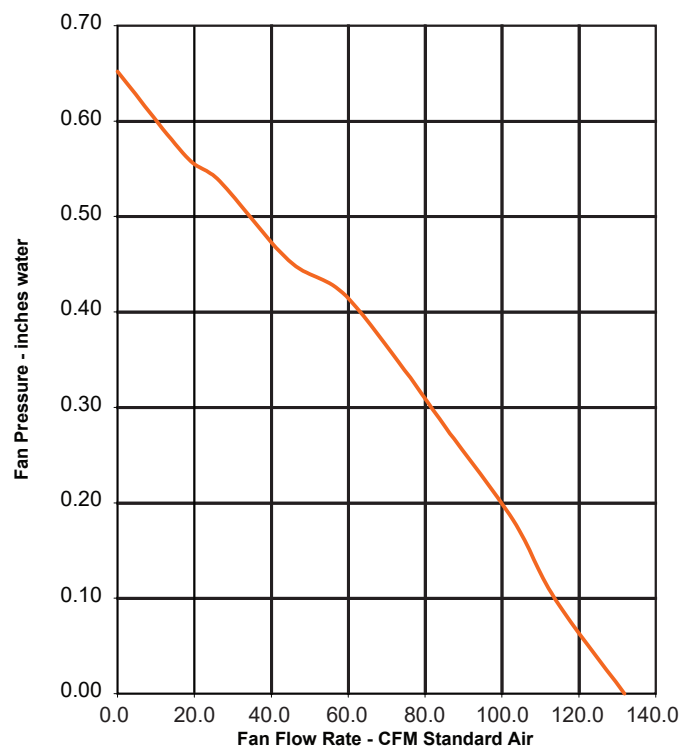

SE110

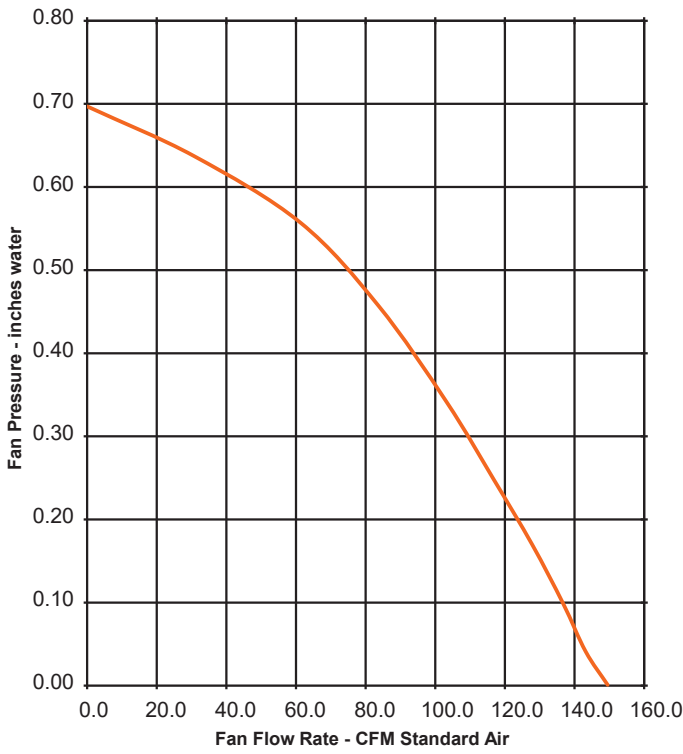

SE120

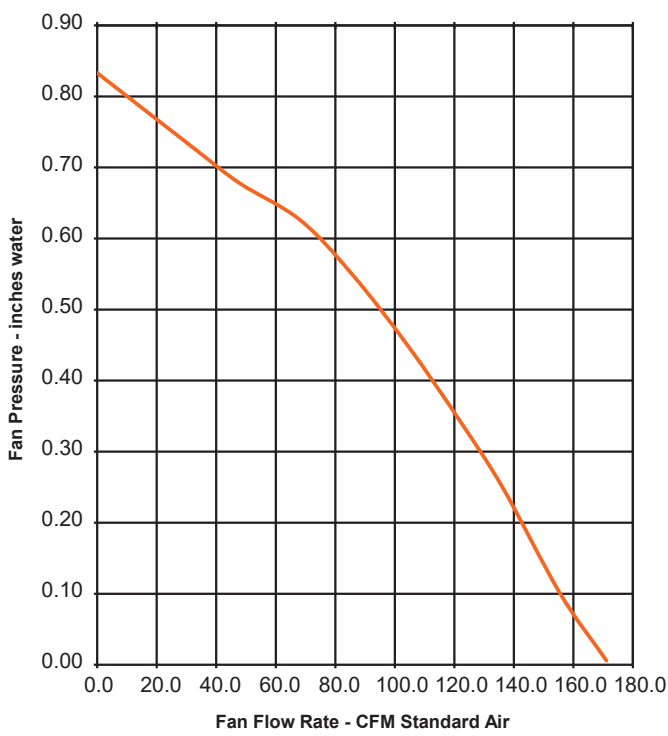

SE150

CERTIFICATIONS





Moves Air Quietly Efficiently Economically

SES Low Profile Series

MODELS SES80 SES100

Ultra Silent, High Performance, Attractive Design Grille

Description

Ventilating fan should be ceiling or wall mounted and capable of exhausting air quietly and efficiently. The SES series is HVI and ENERGY STAR certified. It comes with a capacitor start motor which is known for its high efficiency and long lasting reliability. It holds an ETL evaluation and conforms to UL and cUL safety standards. This fan has a unique plug and play concept that allows you to to add accessories such as motion sensor, humidistat, light, or even speed/controller without changing the fan.

Housing

Rust proof paint housing
Detachable 4 inch round compatible collar which includes a light weight built in back draft damper.
Double hanger bar mounting brackets that are adjustable up to 24 inch span allows for ideal positioning.

Motor/Blower

Plug in permanently lubricated motor- Engineered for continuous operation.
The motor is energy efficient and surpasses the minimum ENERGY STAR requirements for continuous duty operation.
Power rating should be 120 volts and 60 Hz
Fan shall be ETL and cETL listed for tub/shower enclosure when used with a GFCI branch circuit.
Motor comes with a built in overload disconnect for safety and longer motor life.
Our SES series operates at lower RPM's to give you quieter operation.

Grille

The Premium grille is low profile that has elegance and still able to maintain its simplicity.
Made of a rugged polymeric resin that's known for its long life durability.
Comes with torsion spring clips that helps mount grille evenly.

Typical specification

Ventilation fan shall be ceiling or wall mount optional.
It shall be ducted to a roof vent or wall cap using 4 inch round pipe.
Blower assembly shall be removable, have a centrifugal type blower wheel and a permanently lubricated motor designed for continuous operation.
Air and sound delivery shall meet the HVI certified ratings as per the fan curves attached.
STERLING ventilators come with permanent split capacitor motor which improves efficiency this is why it has qualified to carry the ENERGY STAR label.



Optional Humidity Sensor

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

CERTIFICATIONS







Moves Air Quietly Efficiently Economically

SES Low Profile Series

Model Number	SES80		SES100	
Static Pressure in inches w.g.	0.1	0.25	0.1	0.25
Air Volume (CFM)	80	70	100	88
Noise (sonse)	0.7	N/A	1.1	N/A
Fan Watts	25W		25W	
Duct Diameter	3"		4"	
Power Rating (V/Hz)	120/60			

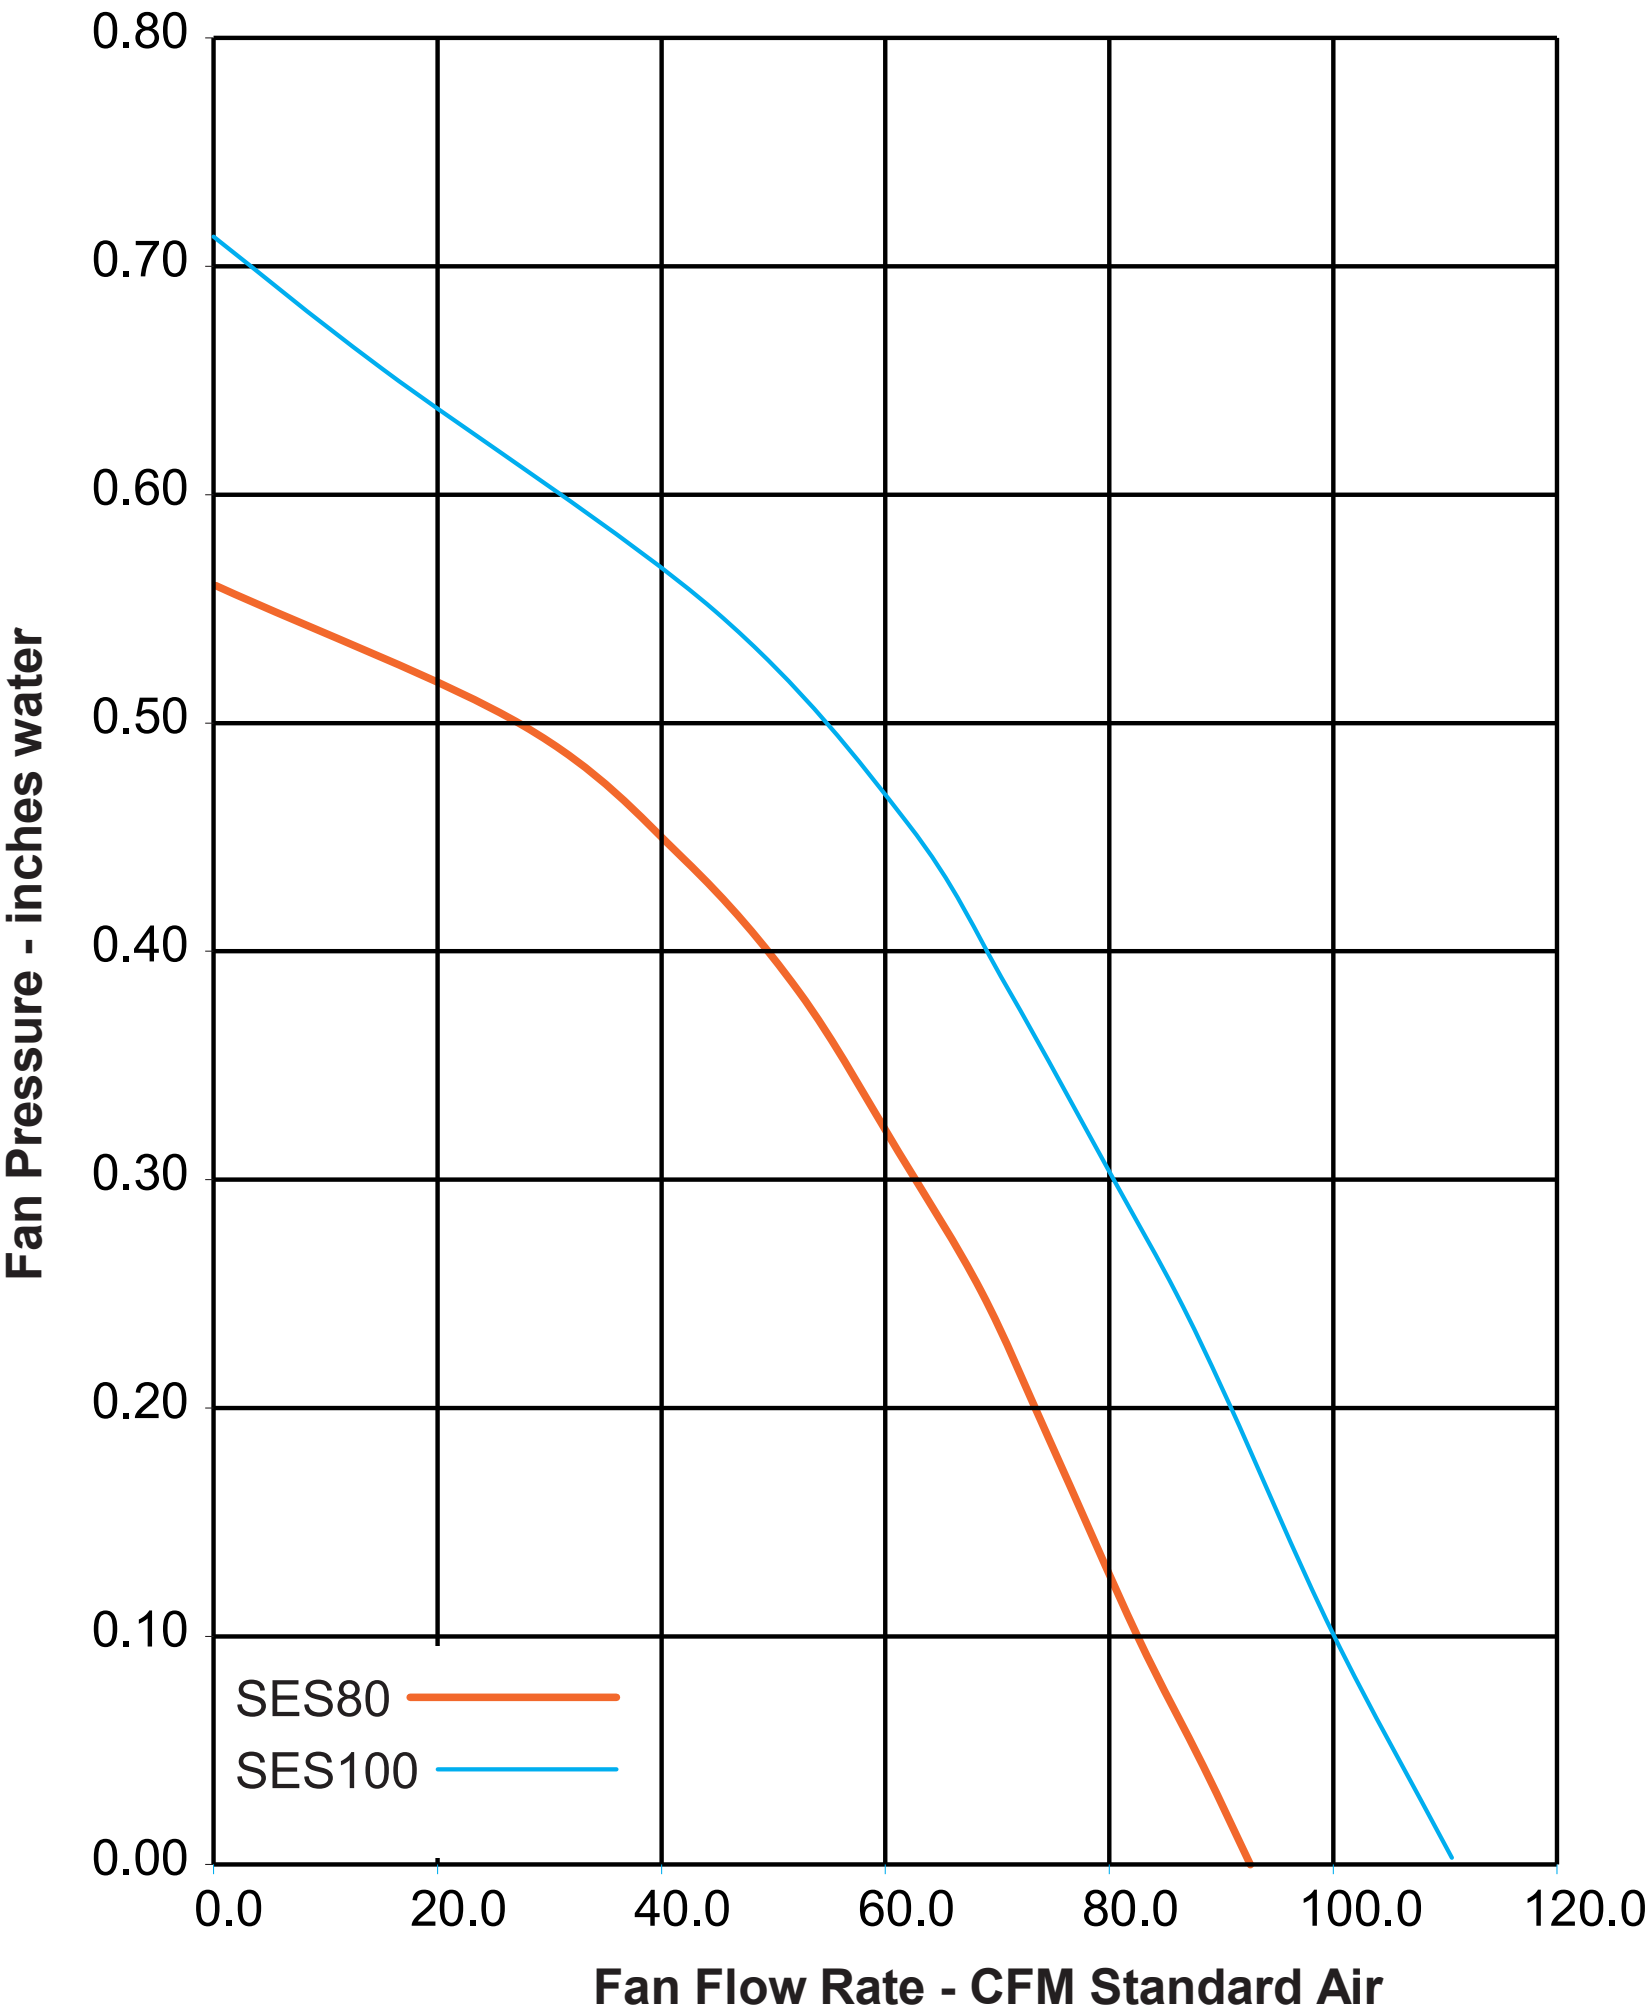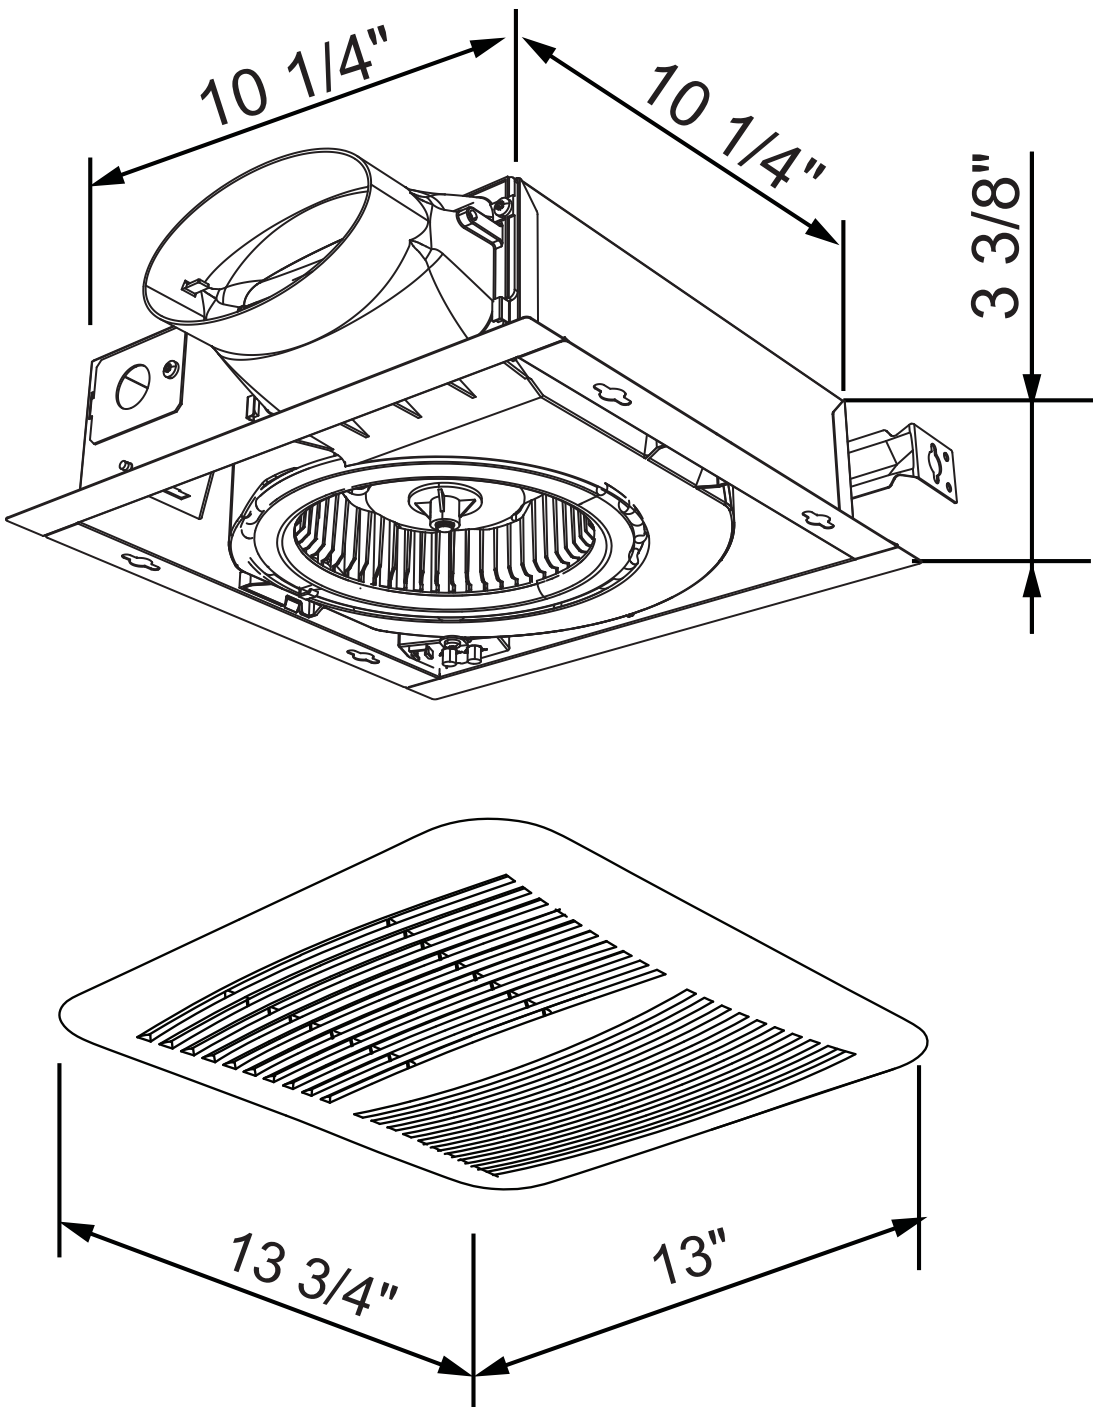

CERTIFICATIONS

