



BRAVA Cedar Shake



Beautifully authentic high-performance roofing.

The beautiful look of a cedar shake roof without the maintenance.

Truly realistic

Our proprietary process creates the most authentic-looking cedar shake on the market.

Superior performance

BRAVA is designed to withstand even the most severe weather, boasting the highest hail resistance rating in the industry.

Enhanced curb appeal

Curb appeal directly correlates with owner satisfaction and higher property value.

Maintenance free

BRAVA's proprietary formulation ensures extreme durability.

Color technology

BRAVA's proprietary multi-coloring process, means you get the authentic appearance of a natural product, complete with variegated colors throughout the entire product.




Fully sustainable

BRAVA uses recycled material to create a roof that is fully recyclable.

Complete

BRAVA offers a complete line of accessory tiles.

Unparalleled Performance

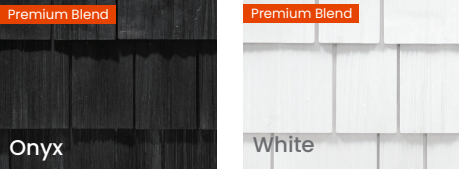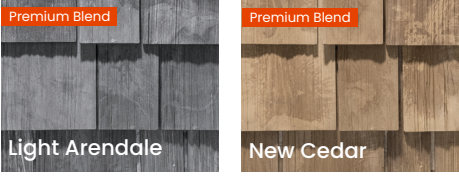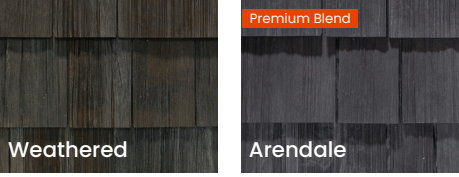

Note: Additional Cool Colors available. Premium Blend and Title 24 Cool Roof Colors are available as an up-charge from Standard Color pricing. Please consult your sales representative for additional information.

Description	Weight	Dimensions
Shake Field Tile 5"	1.2 lbs.	5" x 22"
Shake Field Tile 7"	1.6 lbs.	7" x 22"
Shake Field Tile 12"	2.8 lbs.	12" x 22"
Starter	1.6 lbs.	12" x 12"
Hip & Ridge	2.0 lbs.	5 3/8" x 6" x 14"
Solid Shake Accessory	4.7 lbs.	12" x 22"

Weight Per Square	321.1 lbs./sq.
-------------------	----------------

Aesthetics	BRAVA Cedar Shake	Natural Shake
Authentic Look	✓	✓
5/8" to 1" Thickness	✓	Varies by manufacturer
Hand Split: True-to-Life Texture	✓	✓
Mineral-Infused Process for Authentic Color	✓	✗

Performance	BRAVA Cedar Shake	Natural Shake
Not Prohibited in Many Jurisdictions	✓	✗
Fire Retardant: Class A or Class C	✓	Varies by manufacturer; needs treatment with corrosive chemicals
Wind Resistance: 188+ mph*	✓	✗
Impact Resistance: Class 4	✓	Natural shake is vulnerable to hail
Freeze/Thaw Resistant	✓	✗
Maintenance-Free	✓	Requires replacement of individual shakes throughout life cycle
Colorfast	✓	✗
Hail Warrantied	✓	✗

Installation	BRAVA Cedar Shake	Natural Shake
Factory-Collated Color Blends	✓	✗
Factory-Collated Widths	✓	✗
Estimated Waste Factor	Low	High; shakes too narrow or broken during installation must be discarded



*BRAVA tiles are tested and approved to withstand wind speeds of up to 188 mph with nails and up to 211 mph with high wind / screw installation. Tolerances +or- 1/2". All specifications subject to change without notice.

The printed colors shown may vary from actual colors. Before making a final selection, be sure to review actual material samples and roof installations. Please contact your salesperson for further assistance.

In order to achieve certain fire and wind ratings, special installation instructions may be required. Please reference BRAVA Roof Tile installation manuals at BravaRoofTile.com for more details.

Stay Informed:
Scan the QR Code
for Cedar Shake's
latest specs

