





PRODUCT INFORMATION

Ferrite pot magnet, with external thread, zinc coating

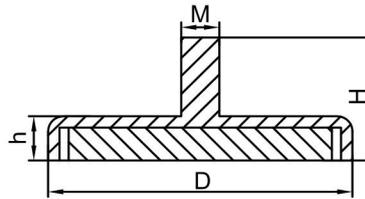

Model	D (mm)	H (mm)	h (mm)	M	Weight (g)	V.P.O.Force (kg)
SFC25	25	16.1	7.4	M4	21	4.5
SFC32	32	15.6	6.9	M4	30	8.5
SFC36	36	16.6	7.9	M4	43	11
SFC40	40	18.4	7.9	M5	52	13
SFC47	47	19	9	M5	82	18
SFC50	50	19.9	9.9	M5	103	23
SFC57	57	20.4	10.4	M5	141	29
SFC63	63	26	14	M6	211	36
SFC80	80	29	18	M8	417	62


Ferrite pot magnet, with screwed bush, zinc coating

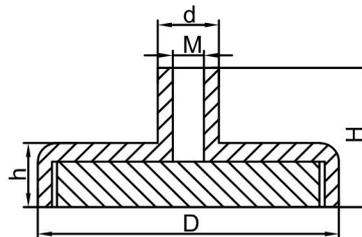

Model	D (mm)	d (mm)	H (mm)	h (mm)	M	Weight (g)	V.P.O.Force (kg)
SFD25	25	6.5	15.5	7.4	M4	22	4.5
SFD32	32	6.5	15	6.9	M4	31	8.5
SFD36	36	6.5	16	7.9	M4	45	11
SFD40	40	7.5	17.9	7.9	M5	55	13
SFD47	47	7.5	18.5	9	M5	84	18
SFD50	50	7.5	19.4	9.9	M5	105	23
SFD57	57	7.5	19.9	10.4	M5	144	29
SFD63	63	10	25.5	14	M6	215	36
SFD80	80	10	31.2	18	M8	421	62



PRODUCT INFORMATION

Neodymium hook magnet, with hook, nickel coating

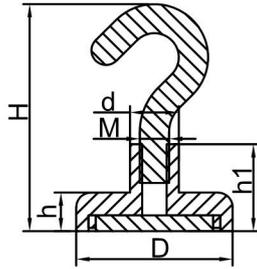

Model	D (mm)	d (mm)	h (mm)	h1 (mm)	H (mm)	M	Weight (g)	V.P.O.Force (kg)
SNE10	10	6	5	12.5	33	M3	6	2
SNE12	12	6	5	12.5	33	M3	7	4
SNE16	16	6.5	5	12.6	35	M4	12	8
SNE20	20	6.5	7	14	36	M4	21	12
SNE25	25	7.5	8	17	45	M5	37	23
SNE32	32	10	8	18	48	M6	61	34
SNE36	36	10	8	18	48	M6	69	50
SNE42	42	10	8.6	18	48	M6	101	72
LNE48	48	12	11	24	61	M8	182	81
LNE60	60	12	15	28	64.8	M8	362	160
LNE75	75	17	18	35	81	M10	681	270


Neodymium hook magnet, with eyelet hook, nickel coating

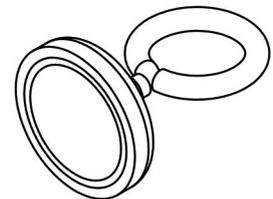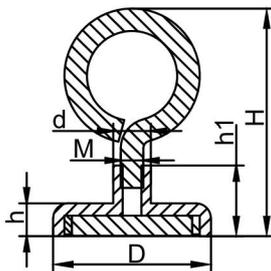

Model	D (mm)	d (mm)	h (mm)	h1 (mm)	H (mm)	M	Weight (g)	V.P.O.Force (kg)
SNF10	10	6	5	12.5	33	M3	7	2
SNF12	12	6	5	12.5	33	M3	8	4
SNF16	16	6.5	5	12.6	34.6	M4	12	8
SNF20	20	6.5	7	14	36	M4	21	12
SNF25	25	7.5	8	17	44.5	M5	38	23
SNF32	32	10	8	18	47.5	M6	63	34
SNF36	36	10	8	18	47.5	M6	71	50
SNF42	42	10	8.6	18	47.5	M6	106	72
LNF48	48	12	11	24	60.5	M8	187	81
LNF60	60	12	15	28	64.5	M8	367	160
LNF75	75	17	18	35	91	M10	697	270


PRODUCT INFORMATION

Neodymium hook magnet, with hook, nickel coating

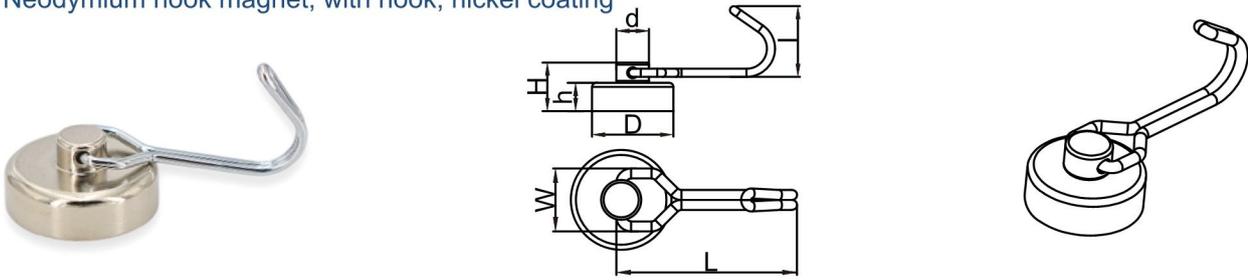


Model	D (mm)	d (mm)	h (mm)	H (mm)	L (mm)	W (mm)	l (mm)	Weight (g)	V.P.O.Force (kg)	P.P.O.Force (kg)
SNG16-1	16	8	6	11	26	11.7	16.3	13	5.5	2

Neodymium hook magnet, with hook, nickel coating

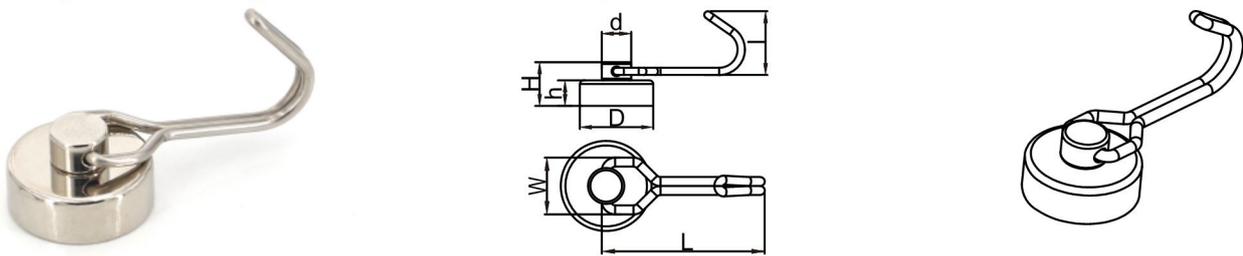

Model	D (mm)	d (mm)	h (mm)	H (mm)	L (mm)	W (mm)	l (mm)	Weight (g)	V.P.O.Force (kg)	P.P.O.Force (kg)
SNG20-1	20	8	7	12	35	11.2	17.4	19	9.5	3.5


Neodymium hook magnet, with swivel hook, nickel coating

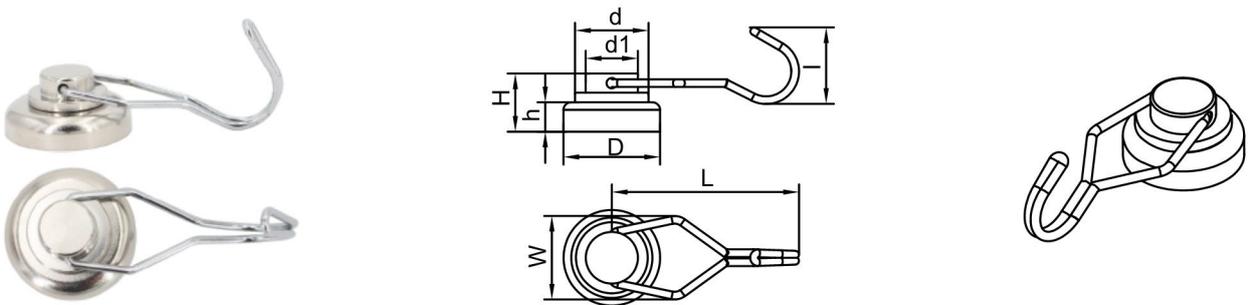

Model	D (mm)	d (mm)	d1 (mm)	h (mm)	H (mm)	L (mm)	W (mm)	l (mm)	Weight (g)	V.P.O.Force (kg)	P.P.O.Force (kg)
SNG25	25	20	13.5	8	15.5	53.5	23	24	38	21	7.5
SNG32	32	20	13.5	8	15.5	53.5	23	24	52	34	12.5
SNG36	36	20	13.5	8	15.5	53.5	23	24	65	50	15.5
SNG42	42	20	13.5	8.6	16.1	53.5	23	24	92	70	22


PRODUCT INFORMATION

Neodymium hook magnet, with carabiner-rotation, nickel coating

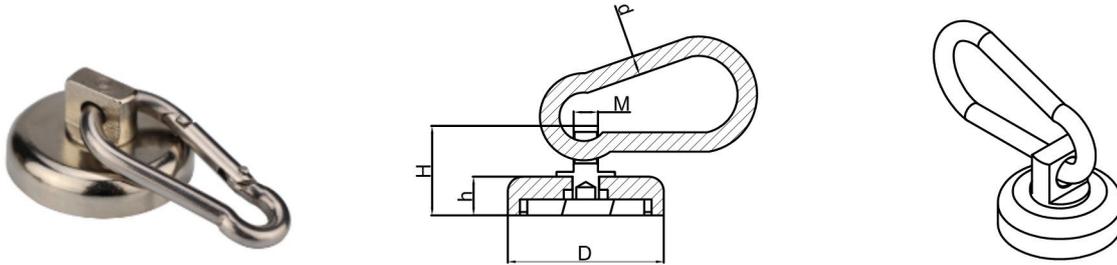


Model	D (mm)	d (mm)	W (mm)	H (mm)	h (mm)	Weight (g)	V.P.O.Force (kg)	P.P.O.Force (kg)
SNL25	25	4	5	18.5	8	30	21	7.5
SNL32	32	4	5	18.5	8	47	34	12.5
SNL36	36	5	5	18.5	8	59	50	15.5
SNL42	42	5	5	19.1	8.6	115	70	22

Neodymium hook magnet, with hook, nickel coating

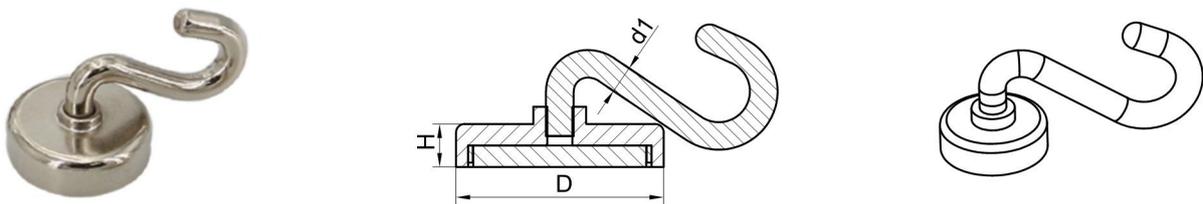

Model	D (mm)	H (mm)	d1 (mm)	Weight (g)	P.P.O.Force (kg)
SNS16	φ16	5	φ4	16	2.5
SNS25	φ20	8	φ5	37.5	6
SNS32	φ32	8	φ5.8	62.5	8



Neodymium hook magnet, with hook, nickel coating

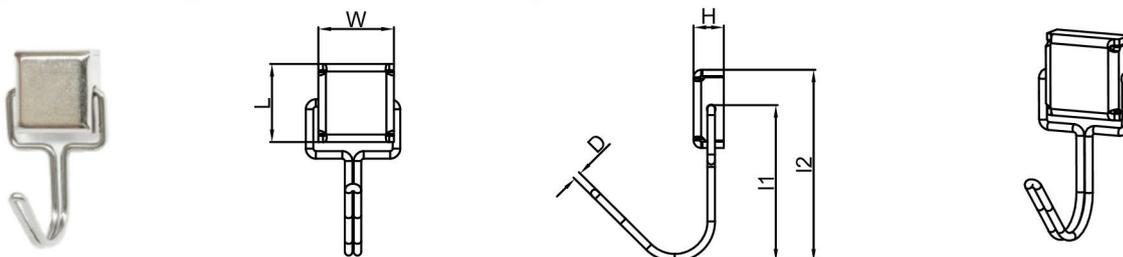

Model	W (mm)	L (mm)	H (mm)	D (mm)	l1 (mm)	l2 (mm)	Weight (g)	V.P.O.Force (kg)	P.P.O.Force (kg)
SNY12	12	12.5	4.8	1.2	25	30.6	5.6	3	1.5



PRODUCT INFORMATION

Ferrite hook magnet, with hook, zinc coating

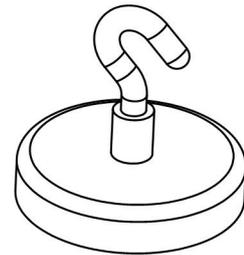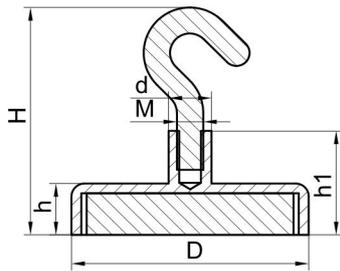

Model	D (mm)	d (mm)	h (mm)	h1 (mm)	H (mm)	M	Weight (g)	V.P.O.Force (kg)
SFE25	25	6.5	7.4	15.5	37.5	M4	25	4.5
SFE32	32	6.5	6.9	15.6	37.6	M4	34	8.5
SFE36	36	6.5	7.9	16	38	M4	48	11
SFE40	40	7.5	7.9	17.9	45.4	M5	58	13
SFE47	47	7.5	9	18.5	46	M5	88	18
SFE50	50	7.5	9.9	19.4	46.9	M5	109	23
SFE57	57	7.5	10.4	19.9	47.4	M5	148	29
SFE63	63	10	14	25.5	55	M6	220	36
SFE80	80	10	18	31.2	67.7	M8	430	62


Ferrite hook magnet, with hook, zinc coating

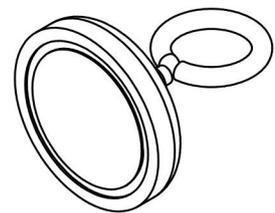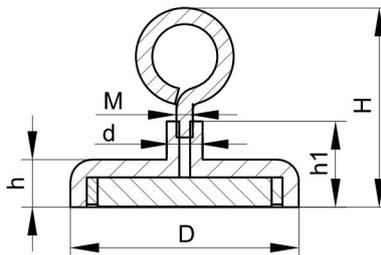

Model	D (mm)	d (mm)	h (mm)	h1 (mm)	H (mm)	M	Weight (g)	V.P.O.Force (kg)
SFF25	25	6.5	7.4	15.5	37.5	M4	25	4.5
SFF32	32	6.5	6.9	15.6	37.6	M4	34	8.5
SFF36	36	6.5	7.9	16	38	M4	48	11
SFF40	40	7.5	7.9	17.9	45.4	M5	58	13
SFF47	47	7.5	9	18.5	46	M5	88	18
SFF50	50	7.5	9.9	19.4	46.9	M5	109	23
SFF57	57	7.5	10.4	19.9	47.4	M5	148	29
SFF63	63	10	14	25.5	55	M6	220	36
SFF80	80	10	18	31.2	67.7	M8	430	62


PRODUCT INFORMATION

Ferrite hook magnet, with swivel hook, powder coating

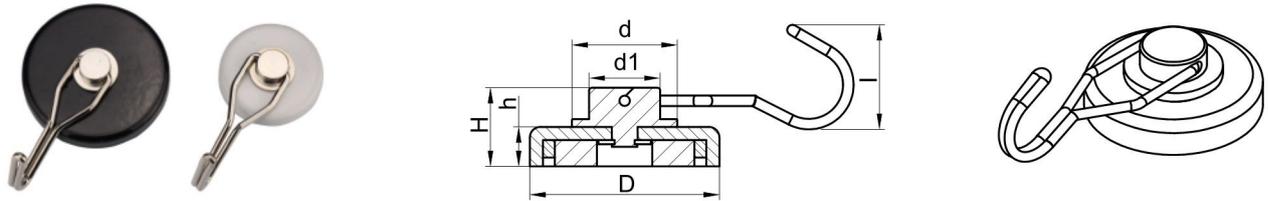


Model	D (mm)	d (mm)	d1 (mm)	H (mm)	h (mm)	l (mm)	Weight (g)	V.P.O.Force (kg)	P.P.O.Force (kg)
SFG36	36	16	10.8	14.5	8.3	20	50	4.2	1.7
SFG52	52	16	10.8	14.5	8.3	20	80	7.4	2.5

Neodymium rubber coated hook magnet, plastic case

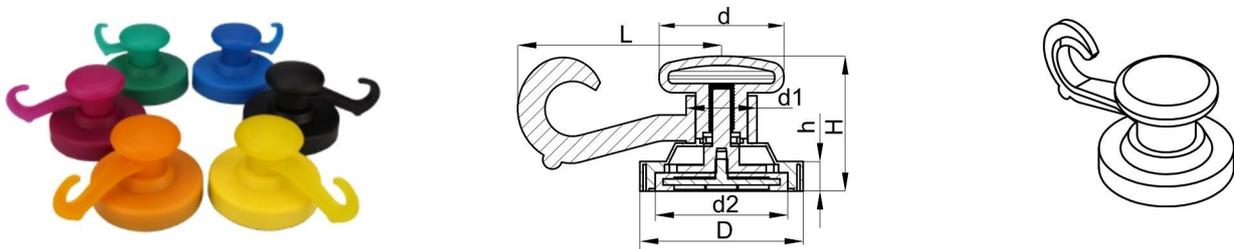

Model	D (mm)	d (mm)	d1 (mm)	d2 (mm)	H (mm)	h (mm)	L (mm)	Weight (g)	P.P.O.Force (kg)
STG43	53	35	22.5	43	43.5	10	65	55	2.5
STG66	68.2	35	22.5	66	51	13.8	65	139	10


Neodymium rubber coated hook magnet

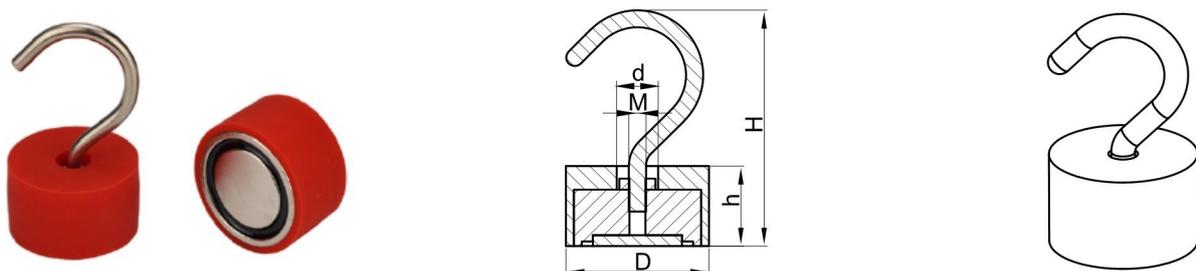

Model	D (mm)	d (mm)	h (mm)	H (mm)	M	Weight (g)	V.P.O.Force (kg)
LSE45	45	13	25.5	75	M6	206	50


PRODUCT INFORMATION

Neodymium hook magnet, with hook, nickel coating

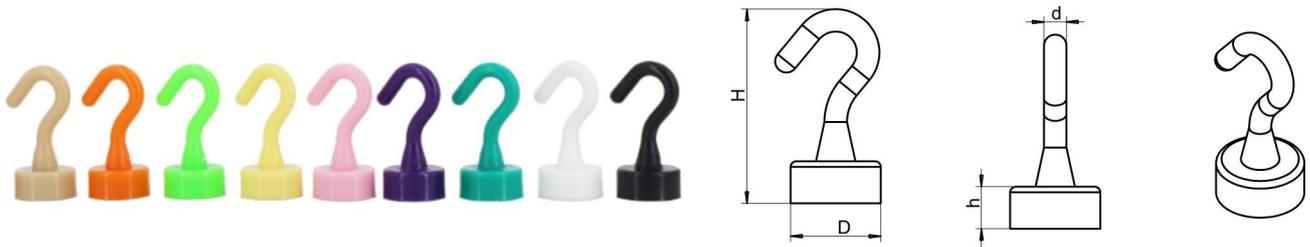

Model	D (mm)	H (mm)	d (mm)	h (mm)	Weight (g)	V.P.O.Force (kg)
PNE16	16	34.7	4	7.5	5.8	6


Neodymium butt magnet, nickel coating

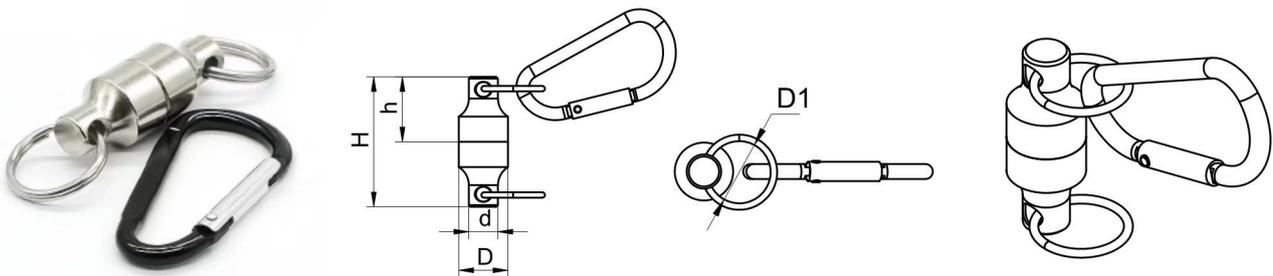

Model	D (mm)	H (mm)	d (mm)	h (mm)	D1 (mm)	Weight (g)	V.P.O.Force (kg)
LNQ13.5	13.5	38	8	18	15	30	6


PRODUCT INFORMATION

Neodymium fishing magnet, with stainless steel hook, nickel coating

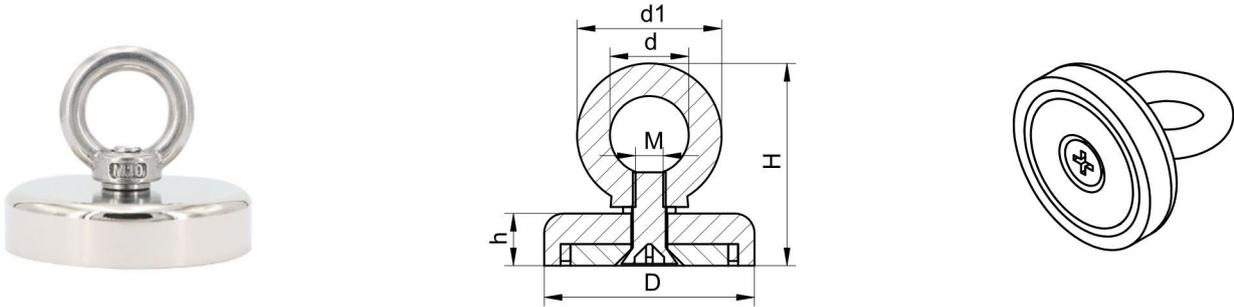

Model	D (mm)	d (mm)	d1 (mm)	H (mm)	h (mm)	M	Weight (g)	V.P.O.Force (kg)
SNJ20	20	10	19	27	7	M4	27	11kg/25lb
SNJ25	25	12	22.5	32	8	M5	44	20kg/45lb
SNJ32	32	12	22.5	32	8	M5	59	32kg/70lb
SNJ36	36	15.5	27	38.5	8	M6	71	43kg/90lb
SNJ42	42	15.5	27	39.1	8.6	M6	98	65kg/140lb
LNJ48	48	19.5	34.5	47	11	M8	197	75kg/160lb
LNJ55	55	19.5	34.5	48	12	M8	278	95kg/200lb
LNJ60	60	19.5	34.5	51	15	M8	330	160kg/350lb
LNJ70	70	24.5	41	60.5	17	M10	608	210kg/450lb
LNJ75	75	24.5	41	61.5	18	M10	632	250kg/550lb
LNJ80	80	24.5	41	61.5	18	M10	821	280kg/600lb
LNJ90	90	24.5	41	61.5	18	M10	899	380kg/800lb
LNJ120	120	27.5	50	68.5	18	M12	1510	480kg/1000lb


Neodymium fishing magnet, with stainless steel hook, nickel coating, magnet protected design

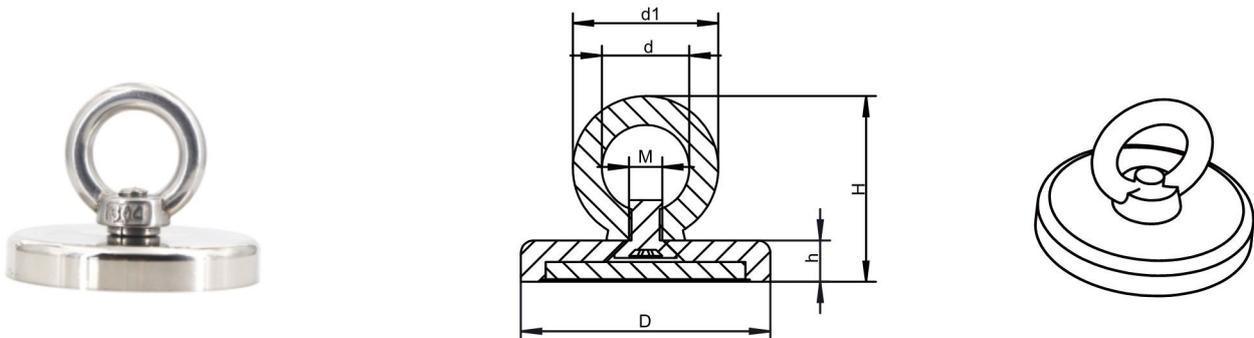

Model	D (mm)	d (mm)	d1 (mm)	H (mm)	h (mm)	M (mm)	Weight (g)	V.P.O.Force (kg)
LNJ60-1	60	21	35	45	10	M8	250	120
LNJ75-1	75	25	41	53	12	M10	450	170


PRODUCT INFORMATION

Neodymium fishing magnet, with stainless steel hook, nickel coating

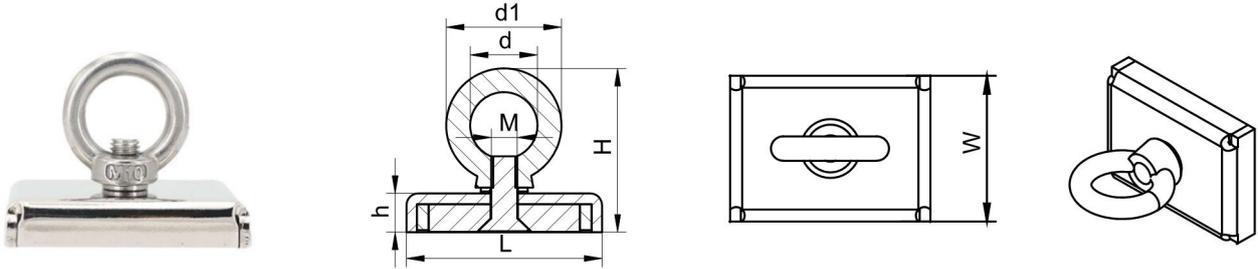

Model	L (mm)	W (mm)	h (mm)	H (mm)	d (mm)	d1 (mm)	M	Weight (g)	V.P.O.Force (kg)
SNN75	75	55	15	59.5	24.5	41	M10	369	160kg/350lb


Neodymium fishing magnet, with stainless steel hook, nickel coating

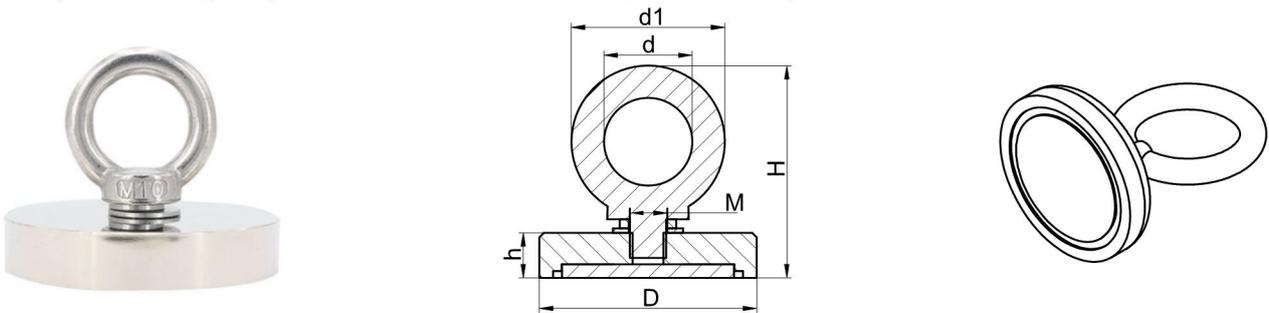

Model	D (mm)	h (mm)	H (mm)	d (mm)	d1 (mm)	M	Weight (g)	V.P.O.Force (kg)
LNM48	48	10	53	19.5	34.5	M8	180	80kg/175lb
LNM60	60	12	55	19.5	34.5	M8	301	135kg/300lb
LNM67	67	12	69	25	41.5	M10	395	170kg/380lb
LNM75	75	15	69	25	41.5	M10	575	220kg/500lb
LNM94	94	18	69	25	41.5	M10	1022	300kg/650lb
LNM116	116	20	78	29	47	M12	1710	450kg/1000lb
LNM136	136	23	78	29	47	M12	2655	600kg/1350lb
LNM160	160	32	118	40	70	M20	5394	1000kg/2200lb
LNM200	200	37	144	50	88	M24	8867	1500kg/3300lb
LNM250	250	40	169	60	105	M30	16481	2000kg/4400lb
LNM320	320	50	219	70	120	M36	32460	3000kg/6600lb


PRODUCT INFORMATION

Neodymium fishing magnet, with stainless steel hook, nickel coating

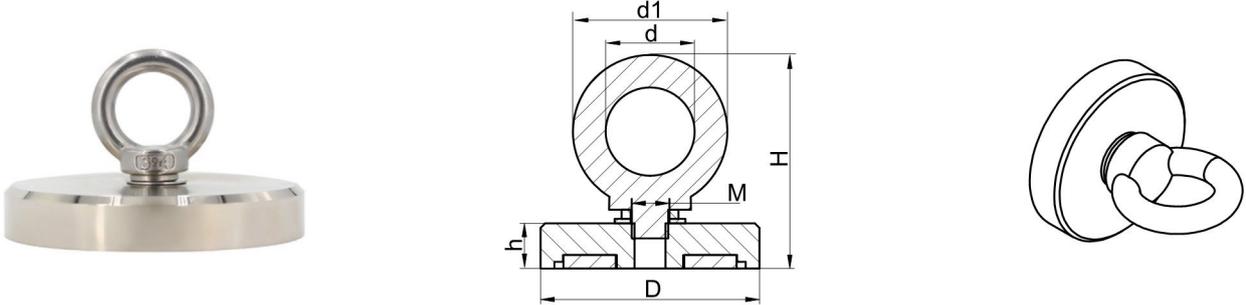

Model	D (mm)	h (mm)	H (mm)	d (mm)	d1 (mm)	M	Weight (g)	V.P.O.Force (kg)
LNM48-1	48	10	48	19.5	34.5	M8	175	70kg/160lb
LNM60-1	60	12	50	19.5	34.5	M8	295	135kg/300lb
LNM67-1	67	12	60	25	41.5	M10	385	170kg/380lb
LNM75-1	75	15	62	25	41.5	M10	567	220kg/500lb
LNM94-1	94	18	67	25	41.5	M10	1012	300kg/650lb
LNM116-1	116	20	70	29	47	M12	1640	450kg/1000lb
LNM136-1	136	23	75	29	47	M12	2675	600kg/1350lb
LNM160-1	160	32	110	40	70	M20	5214	1000kg/2200lb
LNM200-1	200	37	135	50	88	M24	8889	1500kg/3300lb
LNM250-1	250	40	157	60	105	M30	16871	2000kg/4400lb
LNM320-1	320	50	198	70	120	M36	32633	3000kg/6600lb



Neodymium fishing magnet, with stainless steel hook, nickel coating

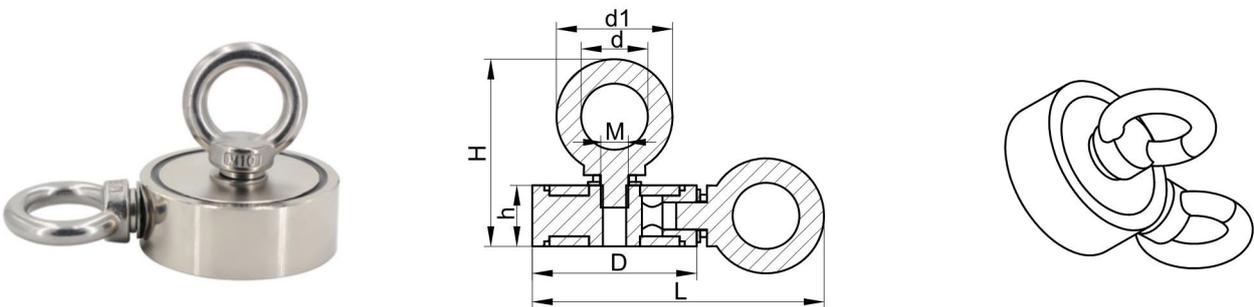

Model	D (mm)	h (mm)	H (mm)	L (mm)	d (mm)	d1 (mm)	M1 M2	Weight (g)	V.P.O.Force (kg)
LNM48-2	48	18	58	83	19.5	34.5	M8	211	70kg/160lb
LNM60-2	60	22	66	95	19.5	34.5	M8	551	135kg/300lb
LNM67-2	67	25	75	102	25	41.5	M10	795	170kg/380lb
LNM75-2	75	25	77	110	25	41.5	M10	945	220kg/500lb
LNM94-2	94	28	85	129	25	41.5	M10	1600	300kg/650lb
LNM116-2	116	32	92	160	29	47	M12	2745	450kg/1000lb
LNM136-2	136	34	92	190	29	47	M12	3580	600kg/1350lb




PRODUCT INFORMATION

Neodymium fishing magnet, with stainless steel hook, nickel coating

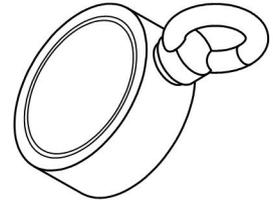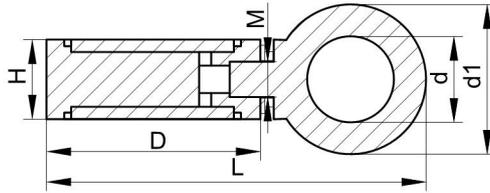

Model	D (mm)	H (mm)	L (mm)	d (mm)	d1 (mm)	M	Weight (g)	V.P.O.Force (kg)
LNM48-3	48	18	86	20	35	M8	280	80kg/175lb
LNM60-3	60	22	98	20	35	M8	420	135kg/300lb
LNM67-3	67	25	111	25	42	M10	720	170kg/380lb
LNM75-3	75	25	119	25	42	M10	885	220kg/500lb
LNM94-3	94	28	138	25	42	M10	1540	300kg/650lb
LNM116-3	116	32	167	29	47	M12	2435	450kg/1000lb
LNM136-3	136	34	187	29	47	M12	3355	600kg/1350lb


Neodymium fishing magnet, with stainless steel hook, nickel coating, rotatable design

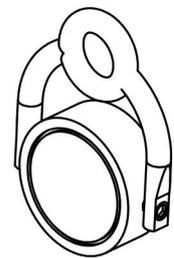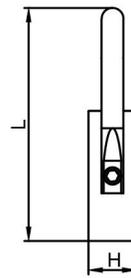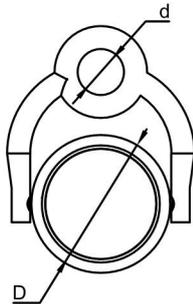

Model	D (mm)	H (mm)	d (mm)	L (mm)	Weight (g)	V.P.O.Force (kg)
LNM60-4	60	22	20	107.5	610	135kg/300lb
LNM75-4	75	25	20	127.5	1000	220kg/500lb

PRODUCT INFORMATION



Neodymium fishing magnet, with stainless steel hook, nickel coating, magnet thicken

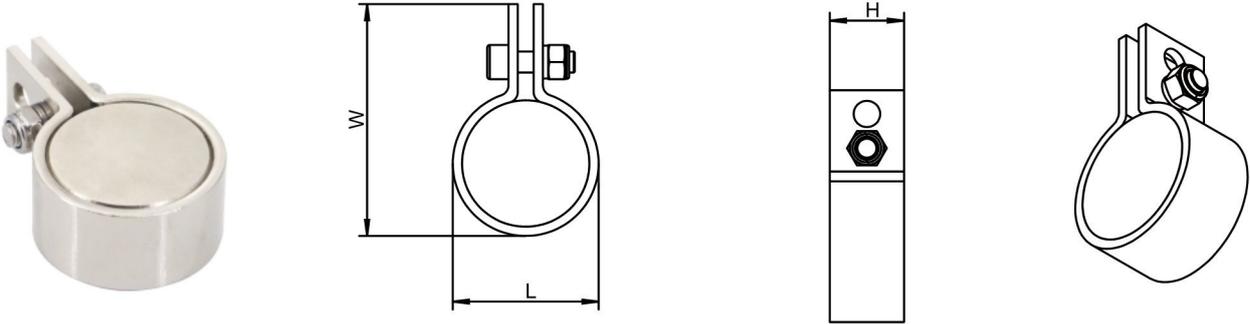

Model	L (mm)	W (mm)	H (mm)	Weight (g)	Central Magnetic Field (GS)
LNT55	55	88	28	580	3000
LNT65	65	98	28	780	3000



PRODUCT INFORMATION

Neodymium rubber coated magnet, with counter bore

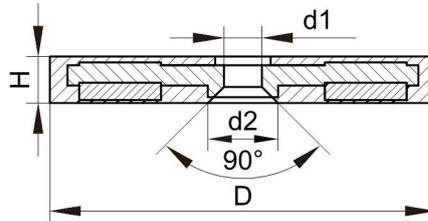

Model	D (mm)	d1 (mm)	d2 (mm)	H (mm)	Weight (g)	V.P.O.Force (kg)
STA22	22	4.5	8.6	6	8	2
STA34	34	4.5	8.5	8	20	4
STA43	43	4.5	8.6	7	27	9



Neodymium rubber coated magnet, with bore

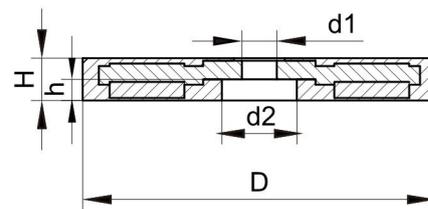

Model	D (mm)	d1 (mm)	d2 (mm)	h (mm)	H (mm)	Weight (g)	V.P.O.Force (kg)
STB22	22	4.5	8.6	3	6	8	2
STB34	34	4.5	9.5	4	8	20	6
STB43	43	4.5	9.5	3	7	27	9



PRODUCT INFORMATION

Neodymium rubber coated magnet, with external thread

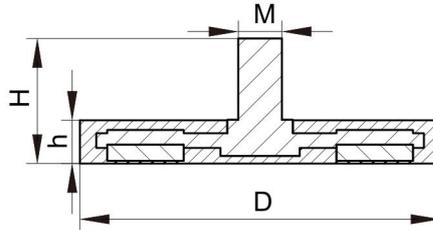

Model	D (mm)	h (mm)	H (mm)	M	Weight (g)	V.P.O.Force (kg)
STC22	22	6	12.5	M4	14	4.5
STC34	34	6	14.5	M4	25	6
STC43	43	6	21	M6	32	8
STC66	66	8	23	M8	107	20
STC88	88	8.5	24.5	M8	193	42



Neodymium rubber coated magnet, with screwed bush

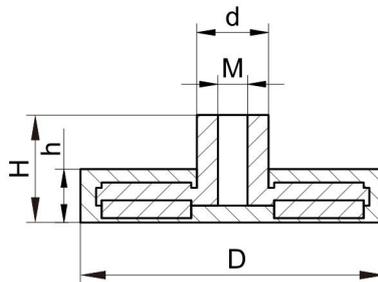

Model	D (mm)	d (mm)	h (mm)	H (mm)	M	Weight (g)	V.P.O.Force (kg)
STD22	22	8	6	11.5	M4	12	4.5
STD34	34	8	6	12	M4	22	6
STD43	43	8	6	12	M4	34	8
STD66	66	12	8	14.2	M5	104	20
STD88	88	12	8.5	15.8	M8	200	42



PRODUCT INFORMATION

Neodymium rubber coated magnet, with internal thread

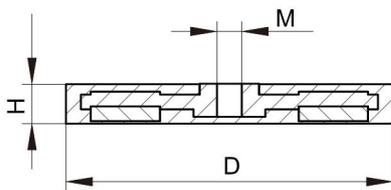

Model	D (mm)	H (mm)	M	Weight (g)	V.P.O.Force (kg)
STP22	22	6	M4	11	3
STP34	34	6	M4	20	6
STP43	43	6	M4	29	8
STP66	66	8	M6	100	20
STP88	88	8.5	M8	186	42



Neodymium rubber coated magnet, with hook

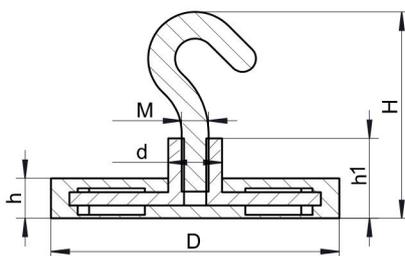

Model	D (mm)	d (mm)	H (mm)	h (mm)	h1 (mm)	M	Weight (g)	V.P.O.Force (kg)
STD22-E	22	8	34	6	11.5	M4	15	5
STD34-E	34	8	35	6	14	M4	25	6
STD43-E	43	8	32	6	12	M4	36	8
STD66-E	66	12	38	8	14.2	M5	110	20
STD88-E	88	12	51	8.5	15.8	M8	223	42




PRODUCT INFORMATION

Neodymium rubber coated magnet, with hook

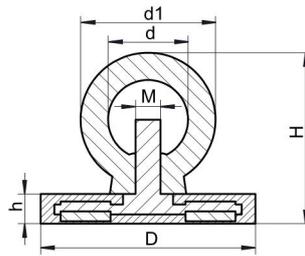

Model	D (mm)	d (mm)	d1 (mm)	H (mm)	h (mm)	M	Weight (g)	V.P.O.Force (kg)
STC43-J	43	15.5	27	34	6	M6	49	8
STC66-J	66	19.5	34.5	42	8	M8	137	20
STC88-J	88	19.5	34.5	42.5	8.5	M8	223	42


Neodymium rubber coated magnet, with heavy hook

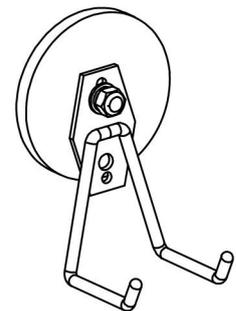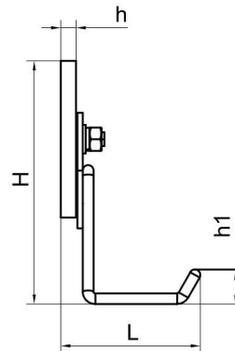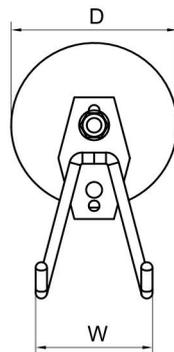

Model	D (mm)	W (mm)	L (mm)	H (mm)	h (mm)	h1 (mm)	Weight (g)	P.P.O.Force (kg)
STC43-L	43	62	75	120	6	23	140	5
STC66-L	66	62	77	130	8	23	215	14
STC88-L	88	62	77.5	142	8.5	23	300	25


PRODUCT INFORMATION

Neodymium rubber coated magnet, with heavy hook

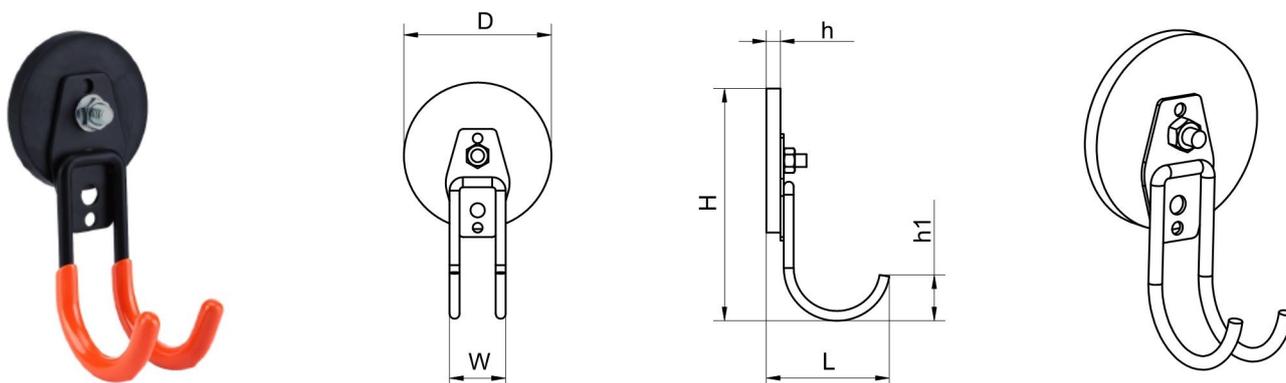

Model	D (mm)	W (mm)	L (mm)	H (mm)	h (mm)	h1 (mm)	Weight (g)	P.P.O.Force (kg)
STC43-C	43	37	73	123	6	29	132	3
STC66-C	66	37	75	134	8	29	207	14
STC88-C	88	37	75.5	145	8.5	29	296	25


Neodymium rubber coated magnet, with basin holder

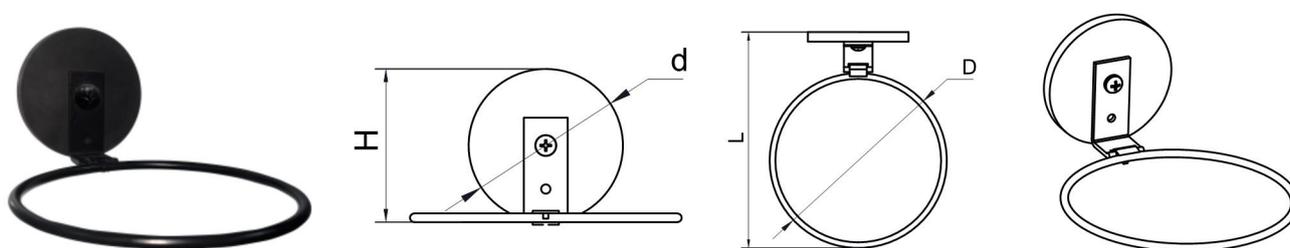

Model	D (mm)	d (mm)	L (mm)	H (mm)	Weight (g)	P.P.O.Force (kg)
STP66-O	110	66	150	77	215	6
STP88-O	150	88	190	88	350	12


PRODUCT INFORMATION

Neodymium rubber coated magnet, with cup holder

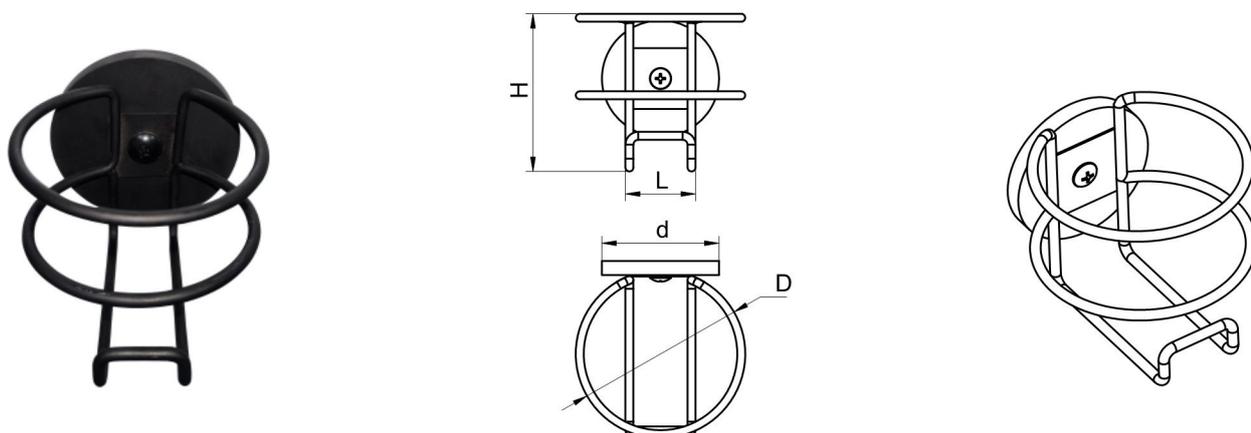

Model	D (mm)	d (mm)	L (mm)	H (mm)	Weight (g)	P.P.O.Force (kg)
STP66-G	91	66	35	85	215	8
STP88-G	91	88	35	85	295	18



Neodymium rubber coated magnet, with webbing

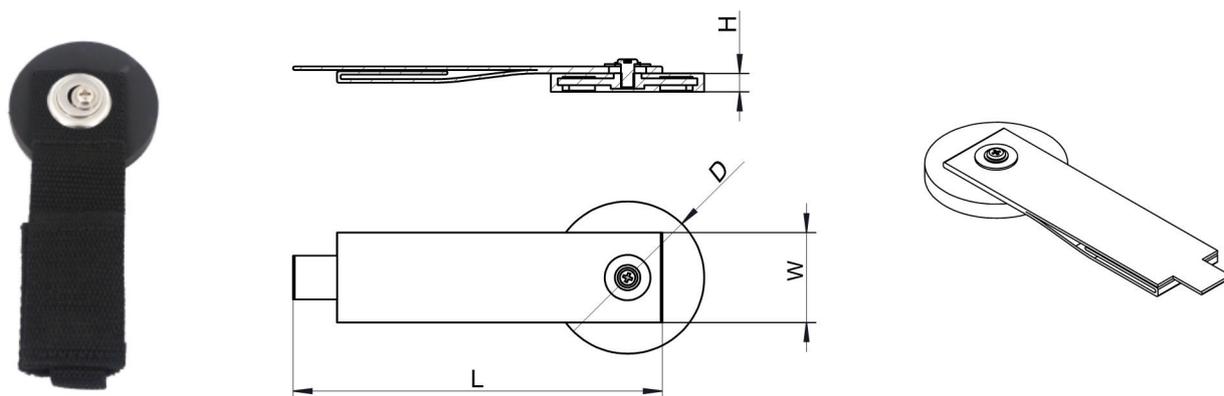

Model	D (mm)	W (mm)	L (mm)	H (mm)	Weight (g)	P.P.O.Force (kg)
STP43-I	43	25	118	6	39	5
STP66-I	66	35	159	8	118	14
STP88-I	88	50	188	8.5	205	25

PRODUCT INFORMATION



Neodymium rubber coated magnet, with counter bore

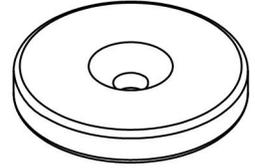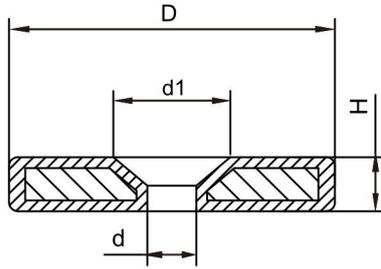

Model	D (mm)	d (mm)	d1 (mm)	H (mm)	Weight (g)	V.P.O.Force (kg)
RNR30	30	5	10.8	5	14	1.5



PRODUCT INFORMATION

Neodymium pin magnet, polypropylene plastic case





Model	D (mm)	H (mm)	Weight (g)	A4 Paper on Whiteboard (pcs)
PNR12	12	20	3.5	18
PNR19	19	25	7	24
PNR29	29	38	22	30

Neodymium pin magnet, acrylic plastic case

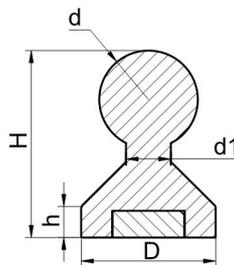

Model	D (mm)	d (mm)	d1 (mm)	H (mm)	h (mm)	Weight (g)	A4 Paper on Whiteboard (pcs)
PNR11	11	9	4.2	17	3.5	1.4	11
PNR15	15	11	5	20	3.5	2.8	15


Neodymium pin magnet, ABS plastic case

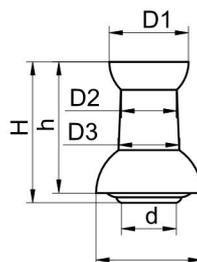

Model	D (mm)	D1 (mm)	D2 (mm)	D3 (mm)	d (mm)	H (mm)	h (mm)	Weight (g)	A4 Paper on Whiteboard (pcs)
PNR10.8	10.8	8.1	5.7	6.2	5.5	14.5	13.5	1	11


PRODUCT INFORMATION

Neodymium pin magnet

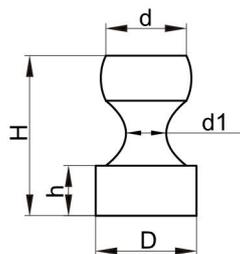



Model	D (mm)	d (mm)	d1 (mm)	H (mm)	h (mm)	自重 Weight (g)	A4纸张数 on 白板 A4 Paper on Whiteboard (pcs)
10*16	10	8	9	16	5	7	11
10*16	10	8	9	16	5	7	11

Neodymium pin magnet



Model	D (mm)	d (mm)	d1 (mm)	H (mm)	h (mm)	Weight (g)	A4 Paper on Whiteboard (pcs)
10*16	10	9	4	16	5	6	11
10*16	10	9	4	16	5	6	11


Neodymium pin magnet



Model	D (mm)	d (mm)	d1 (mm)	H (mm)	h (mm)	Weight (g)	A4 Paper on Whiteboard (pcs)
11*13	11	8	9	13	4	4	11
11*13	11	8	9	13	4	4	11



PRODUCT INFORMATION

Neodymium pin magnet, nickel coating



Model	D (mm)	d (mm)	H (mm)	h (mm)	Weight (g)	A4 Paper on Whiteboard (pcs)
LNR12	12	9	16	4	9.6	12
LNR12E	12	9	16	4	9.6	12
LNR16	16	11	20	5	16	16
LNR20	20	13	25	7	30	19
LNR25	25	18	30	7	53	23



Neodymium pin magnet, nickel coating

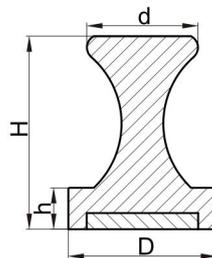

Model	D (mm)	d (mm)	H (mm)	h (mm)	Weight (g)	P.P.O.Force (kg)
LNR32	32	24	42	9	103	8
LNR36	36	26	46	10	140	10
LNR42	42	35	52	10	233	15


PRODUCT INFORMATION

Neodymium pin magnet, polypropylene plastic case

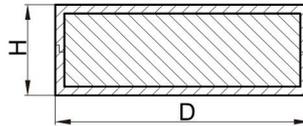

Model	D (mm)	H (mm)	Weight (g)	A4 Paper on Whiteboard (pcs)
PNR12.7*6.35	12.7	6.35	4	11


Neodymium pin magnet, nickel coating

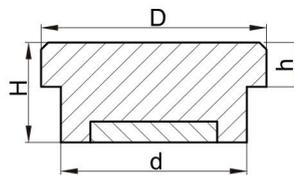

Model	D (mm)	d (mm)	H (mm)	h (mm)	Weight (g)	A4 Paper on Whiteboard (pcs)
LNR16-O	16	13.3	7.2	3.2	9	11
LNR22-O	22	18	9	3	21	13
LNR25-O	25	21	9	3	27	15
LNR30-O	30	27	9	3	43	17




PRODUCT INFORMATION

Ferrite clip magnet, chromium coating

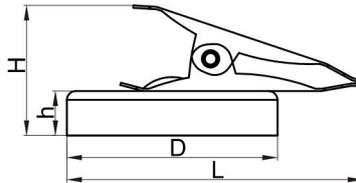




Model	D (mm)	h (mm)	H (mm)	L (mm)	Weight (g)	A4 Paper on Whiteboard (pcs)
SFK36	36	7.4	23.2	50.5	45	140

Neodymium/ Ferrite clip magnet, chromium coating

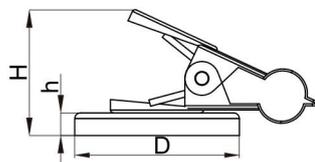

Model	L (mm)	W (mm)	H (mm)	h (mm)	D (mm)	Weight (g)	A4 Paper on Whiteboard (pcs)
SFK31	38	30	22	3.5	28	16	60
SFK38	42	40	26.5	4.2	28	20	80
SFK50	50	51	32.5	4.2	28	23	100


Ferrite clip magnet, chromium coating

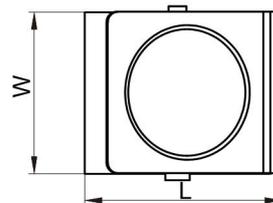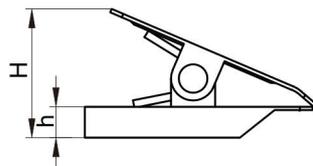

Model	L (mm)	W (mm)	H (mm)	h (mm)	Weight (g)	A4 Paper on Whiteboard (pcs)
SFK30	31	36	21	5	25	15
SFK38-1	38	46.5	25	5.5	45	20
SFK45	46	52	26.5	5.5	67	30
SFK54	67.5	55	34	6	87	40


PRODUCT INFORMATION

Cylindrical magnetic pick up tool

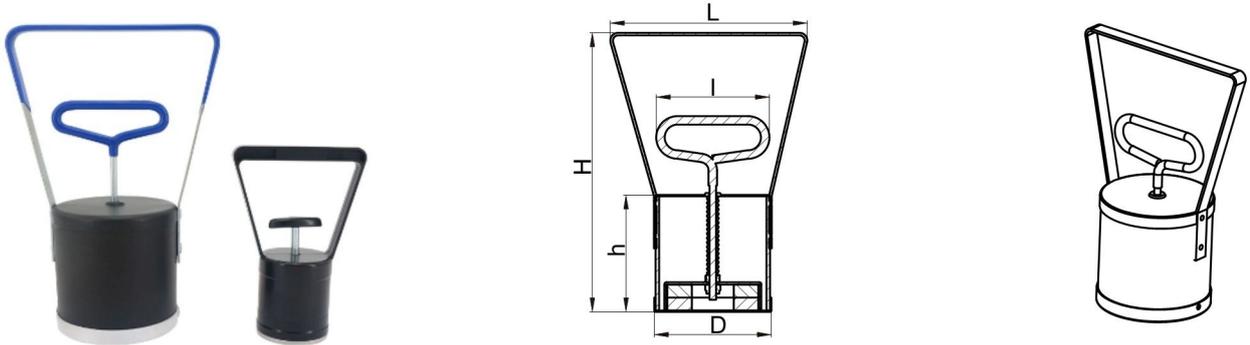

Model	D (mm)	L (mm)	l (mm)	h (mm)	H (mm)	Weight (g)
MC89	89	148	81	90	210	645
MC53	53	95	40	61	138	98


Square magnetic pickup tool

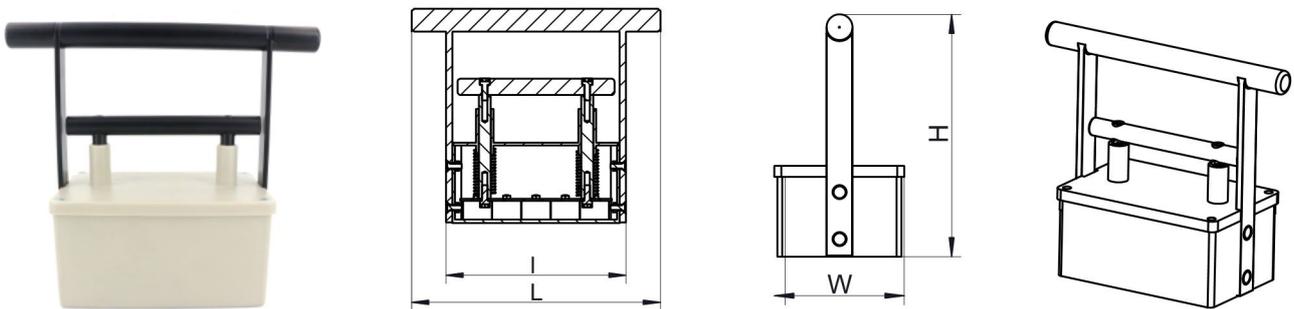

Model	L (mm)	l (mm)	W (mm)	H (mm)	Weight (g)
MR155	238	155	100	210	1420


PRODUCT INFORMATION

Magnetic tool holder, single sided magnet, iron shell

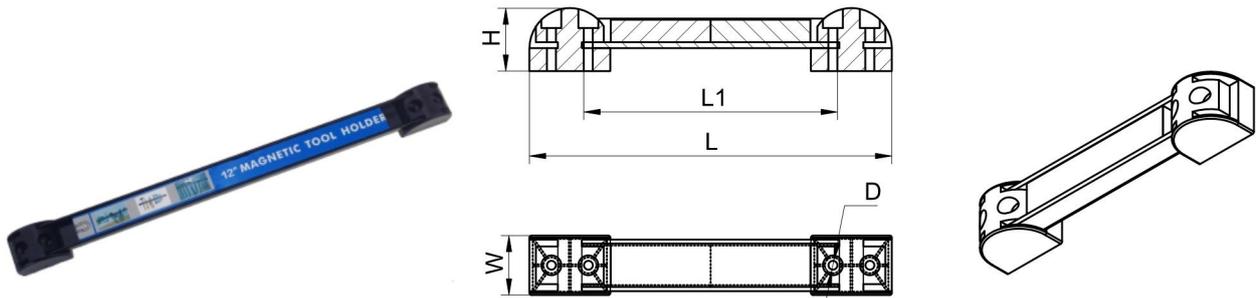

Model	L (mm)	L1 (mm)	H (mm)	W (mm)	D (mm)	Weight (g)
MTH8"	250	8"	28	24	4.5	300
MTH12"	350	12"	28	24	4.5	500
MTH18"	500	18"	28	24	4.5	760
MTH24"	650	24"	28	24	4.5	1020


Magnetic tool holder, double sided magnet, iron shell

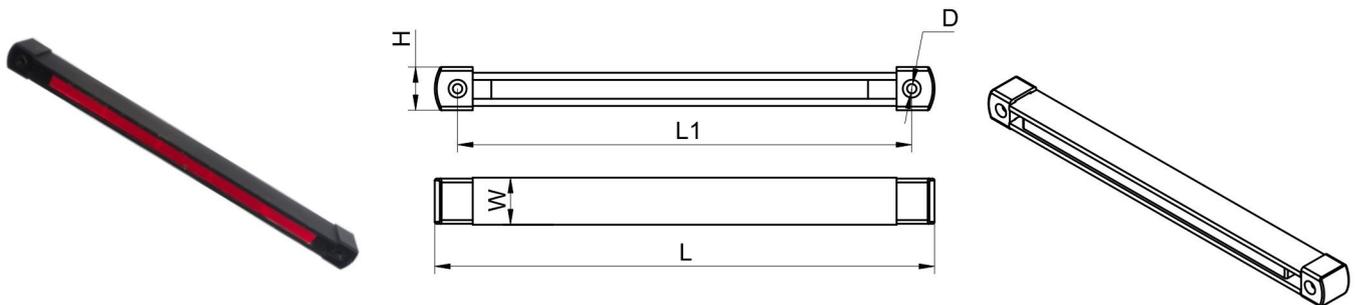

Model	L (mm)	L1 (mm)	H (mm)	W (mm)	D (mm)	Weight (g)
MTH12"-2	304.5	280.8	23	18	5	680
MTH18"-2	457.2	430.2	23	18	5	1080
MTH24"-2	609.6	585.6	23	18	5	1480

PRODUCT INFORMATION

Magnetic tool holder, aluminum alloy shell

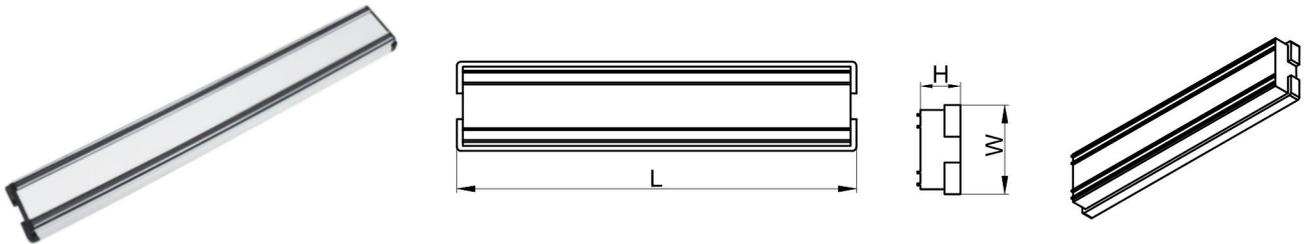


Model	L (mm)	H (mm)	W (mm)	Weight (g)
MTH315	315	20	45	367
MTH365	365	20	45	310
MTH415	415	20	45	336
MTH465	465	20	45	380

磁性工具系列 Magnetic Tools

磁性工具架, 塑料外壳

Magnetic tool holder, plastic shell

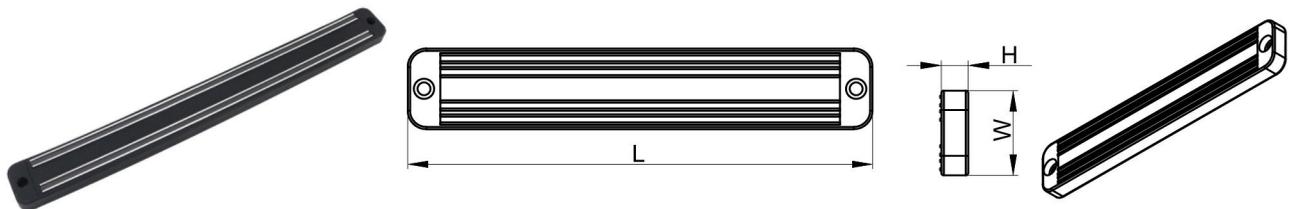

Model	L (mm)	H (mm)	W (mm)	Weight (g)
MTH200-1	200	11	35	152
MTH300-1	300	11	35	216
MTH333-1	333	11	35	236
MTH486-1	486	15	35	428

PRODUCT INFORMATION



Magnetic tool holder, plastic shell



Model	L (mm)	H (mm)	W (mm)	Weight (g)
MTH200-2	200	13	48	146
MTH330-2	330	13	48	272
MTH380-2	380	13	48	320
MTH555-2	555	13	48	495



PRODUCT INFORMATION

Magnetic welding holder

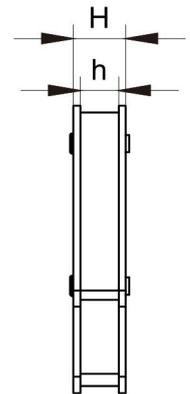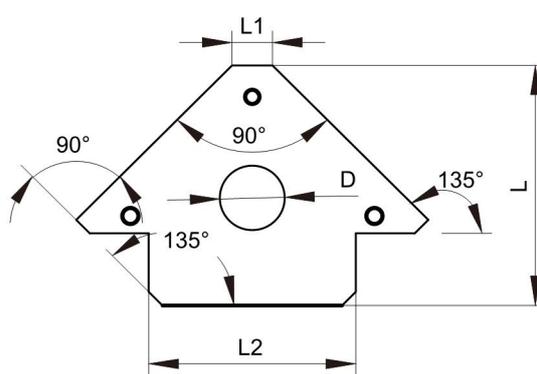

Model	L (mm)	H (mm)	h (mm)	L1 (mm)	L2 (mm)	D (mm)	Weight (g)	V.P.O.Force (Lb)
MWH25	83	14	10	13	71	/	295	25
MWH50	102	16	12	28	92	29	500	50
MWH75	122	24	20	35	113	46	900	75


Magnetic welding holder

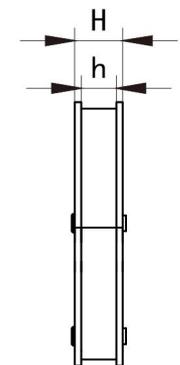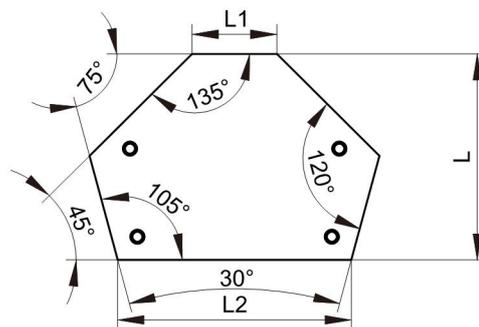

Model	L (mm)	H (mm)	h (mm)	L1 (mm)	L2 (mm)	Weight (g)	V.P.O.Force (Lb)
MWH25-1	70	14	10	34	84	290	25
MWH50-1	90	16	12	43	88	490	50
MWH75-1	110	24	20	55	110	880	75


PRODUCT INFORMATION

Neodymium pot magnet, with counter bore, nickel coating

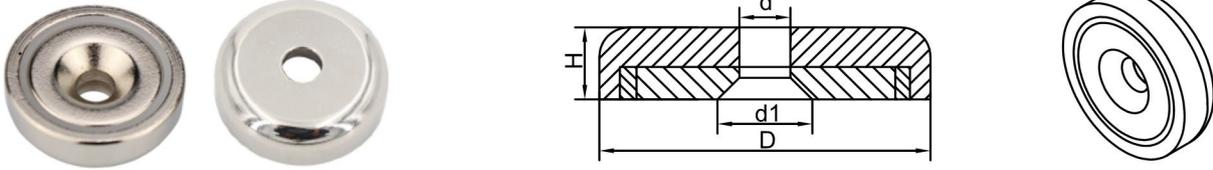

型号 Model	D (mm)	d (mm)	d1 (mm)	H (mm)	Weight (g)	V.P.O.Force (kg)
SNA12	12	3.5	6.5	5	4	2.5
SNA16	16	3.5	6.5	5	7	6
SNA20	20	4.5	8.6	7	14	11
SNA25	25	5.5	10.6	8	25	20
SNA32	32	5.5	10.6	8	42	32
SNA36	36	6.5	11.3	8	54	43
SNA42	42	6.5	11.3	8.6	78	65
LNA48	48	8.5	15.5	11	138	75
LNA55	55	8.5	14.5	12	205	95
LNA60	60	8.5	14.5	15	305	160
LNA70	70	10.5	16.5	17	485	210
LNA75	75	10.5	16.5	18	560	250
LNA80	80	10.5	16.5	18	668	280
LNA90	90	10.5	16.5	18	850	380
LNA120	120	12.5	22.5	18	1520	480


Neodymium pot magnet, with bore, nickel coating

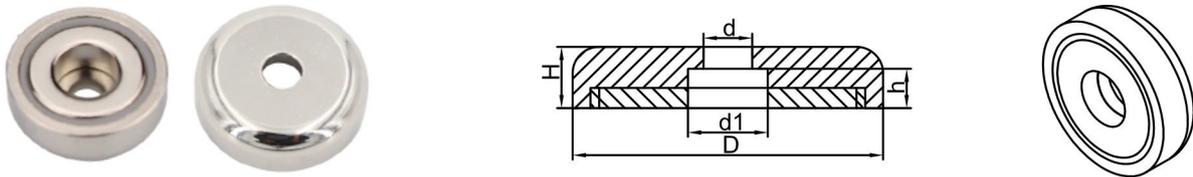

Model	D (mm)	d (mm)	d1 (mm)	H (mm)	h (mm)	Weight (g)	V.P.O.Force (kg)
SNB12	12	3.5	6.5	4.5	3.5	4	2
SNB16	16	3.5	6.5	5	3.5	7	5
SNB20	20	4.5	8	7	4.5	13	10
SNB25	25	5.5	9	8	5.5	19	18
SNB32	32	5.5	9	8	5.5	38	30
SNB36	36	6.5	11	8	6.5	48	40
SNB42	42	6.5	11	8.6	6.5	70	60
LNB48	48	8.5	15	11	8.5	115	70
LNB60	60	8.5	15	15	8.5	240	150
LNB75	75	10.5	18	18	10.5	515	220



PRODUCT INFORMATION

Magnetic welding holder

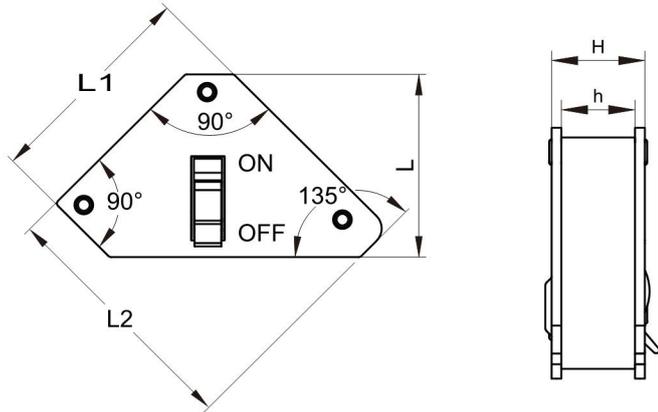

Model	L (mm)	L1 (mm)	L2 (mm)	H (mm)	h (mm)	Weight (g)	V.P.O.Force (Lb)
MWH35-2	86	95	110	26	21	469	35
MWH55-2	118	103	150	33	28	983	55


Magnetic welding holder

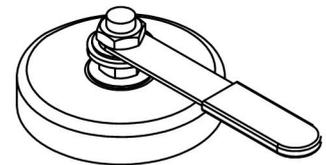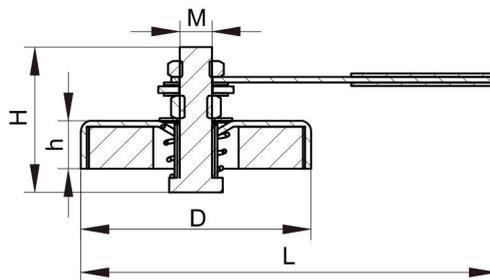

Model	D (mm)	H (mm)	h (mm)	L (mm)	M	Weight (g)	V.P.O.Force (Lb)
MWHD55	55	41	12	140	M8	185	16
MWHD85	85	55	18	153	M12	585	65


PRODUCT INFORMATION

Magnetic welding holder

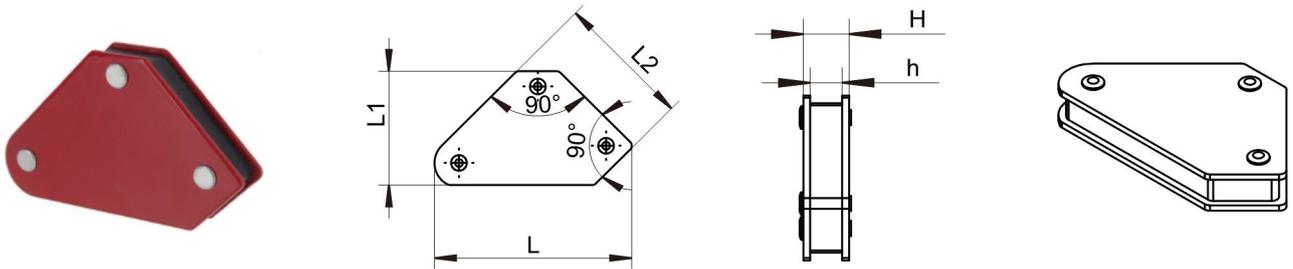

Model	L (mm)	L1 (mm)	L2 (mm)	H (mm)	h (mm)	Weight (g)	V.P.O.Force (Lb)
TH1011	73	43	51	12	7.5	104	5


Magnetic welding holder

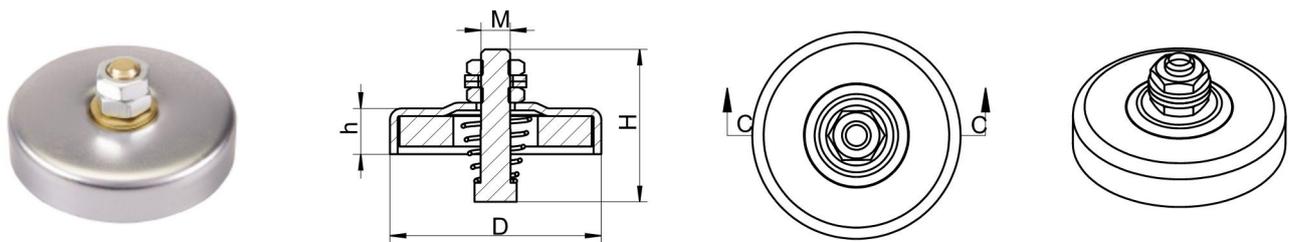

Model	D (mm)	H (mm)	h (mm)	M	Weight (g)	V.P.O.Force (Lb)
TH1010	55	40	12	M8	148	16


PRODUCT INFORMATION

Magnetic welding holder

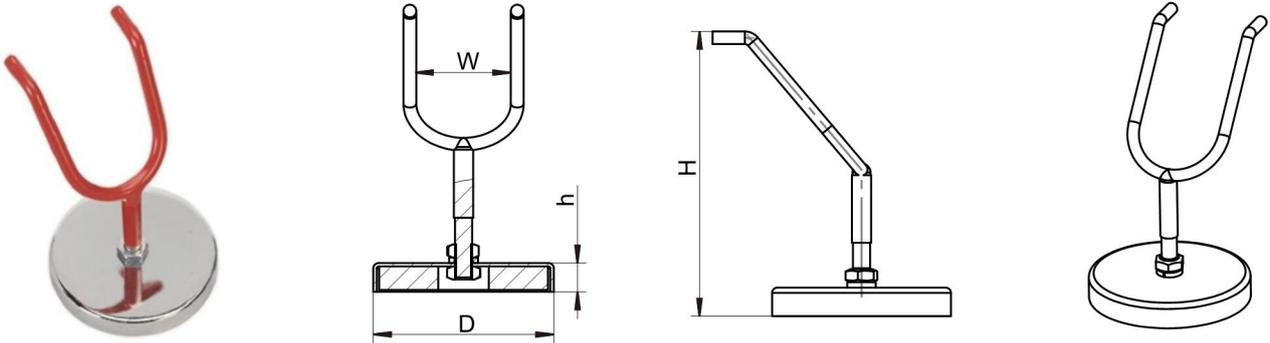

Model	D (mm)	H (mm)	h (mm)	M	Weight (g)	V.P.O.Force (Lb)
TH2001	84	130	13.5	44	400	35




Magnetic welding holder

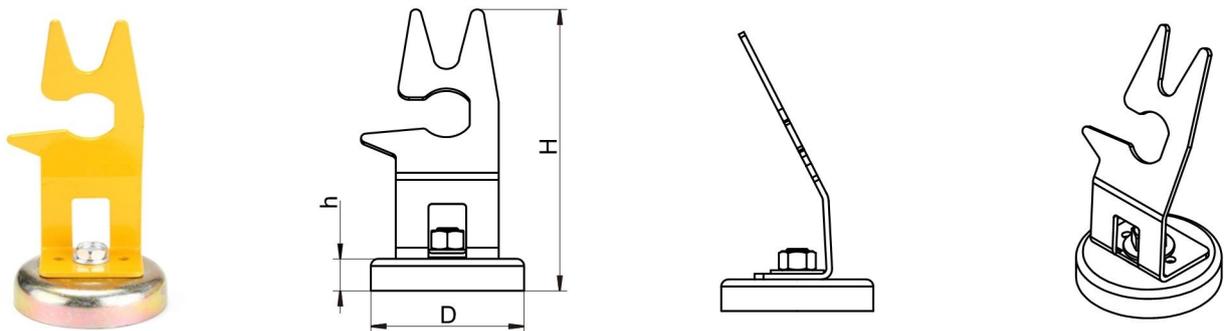

Model	D (mm)	H (mm)	h (mm)	Weight (g)	V.P.O.Force (Lb)
TH2002	85	155	18	685	44


PRODUCT INFORMATION

Magnetic welding holder

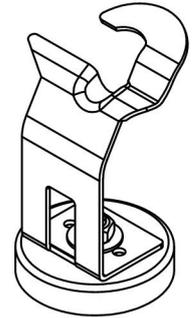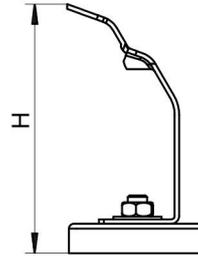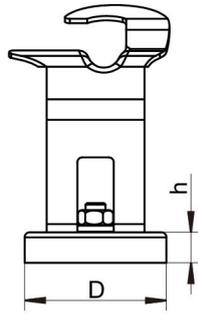

Model	D (mm)	H (mm)	h (mm)	Weight (g)	V.P.O.Force (Lb)
TH2004	85	145	18	737	44

Teflon coated magnet

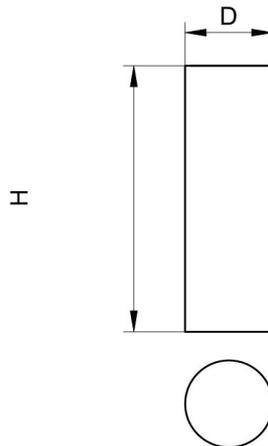

Model	D (mm)	H (mm)	Weight (g)	Max Temp (°C)	Magnetic Field (GS)
PTFE6580	17	52	60	< 80	6500
PTFE7580	17	52	60	< 80	7500
PTFE6515	17	52	60	< 150	6500
PTFE7515	17	52	60	< 150	7500
PTFE6525	17	52	60	< 250	6500

PRODUCT INFORMATION


Small digital tension machine



Model	L (mm)	W (mm)	H (mm)	Weight (kg)	Range (kg)
ZP-1000	320	250	490	10	0-100


PRODUCT INFORMATION

Stainless steel ring, with external thread

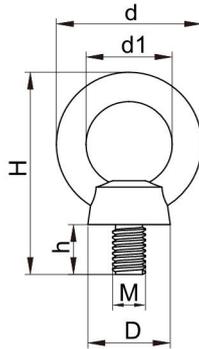

Model	D (mm)	d (mm)	d1 (mm)	h (mm)	H (mm)	M	Weight (g)
CM5	14.5	23.2	13.4	11.2	34.8	M5	15
CM6	15	26.5	16	11.5	41	M6	20.6
CM8	18	34.5	19.5	14.5	51	M8	40.6
CM10	22	41.5	25	18	60.5	M10	73.2
CM12	26.5	47	29	20	68	M12	112



Stainless steel ring, with screwed bush

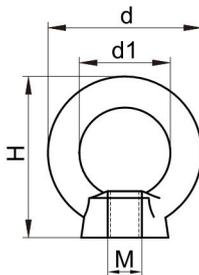

Model	D (mm)	d (mm)	d1 (mm)	H (mm)	M	Weight (g)
DM4	8.5	19	10	19	M4	5.2
DM5	11	22.5	12	23	M5	9.8
DM6	14.5	27	15.5	29	M6	18.5
DM8	18.5	34.5	19.5	34	M8	36
DM10	21.5	41	24.5	41	M10	57.8
DM12	27.5	50	27.5	47.5	M12	99.7



PRODUCT INFORMATION

Stainless steel screw

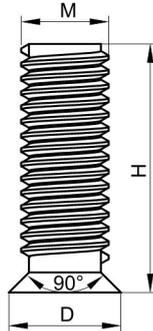

Model	D (mm)	L (mm)	M	Weight (g)
M5	9	12	M5	2
M6	11.5	17	M6	2.9
M8	15	20	M8	7.7
M8	15	25	M8	9
M10	17.5	30	M10	17.9
M12	21.5	35	M12	30.5



Metal plate

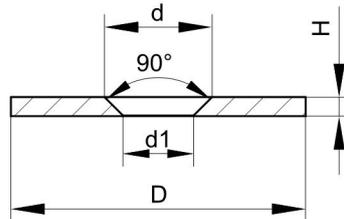

Model	D (mm)	d (mm)	d1 (mm)	H (mm)	Weight (g)
D12*1.5	12	8.4	5.4	1.5	0.9
D15*1.5	15	8.4	5.5	1.5	1.5
D18*1.5	18	8.4	5.5	1.5	2.7
D20*2	20	8.2	5	2	4.4
D23*1.5	23	8.4	5.5	1.5	4.4
D27*3	27	11.6	5.6	3	13.4
D32*3	32	11.6	5.6	3	17.6
D34*3	34	11.6	5.6	3	21.2
D42*3	42	11.6	5.6	3	32.4
D50*3	50	11.6	5.6	3	44.6
D62*3	62	11.6	5.8	3	61.9



PRODUCT INFORMATION

Rubber Sleeve

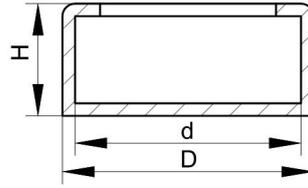



Model	D (mm)	d (mm)	H (mm)	Weight (g)
RS16	19.2	16.2	7.1	1
RS20	23.2	20.2	9.1	2
RS25	28.2	25.2	10.1	2.5
RS32	35.2	32.2	10.1	3.5
RS36	37.6	36	9.2	3.5
RS40	44.2	40.2	11.1	7
RS42	46.2	42.2	12.1	9.5
RS48	52.2	48.2	14.1	11.5
RS60	63	60	16	13.5
RS75	79.2	75.2	21.1	26

Grappling Hook

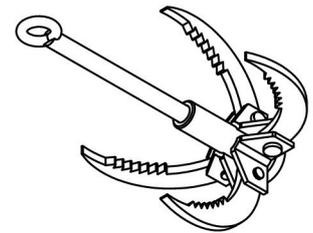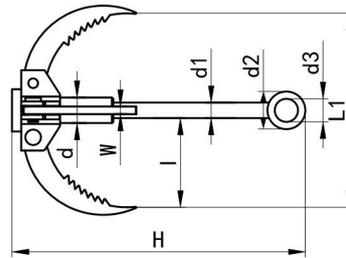

Model	H (mm)	d (mm)	d1 (mm)	d2 (mm)	d3 (mm)	l (mm)	L (mm)	W (mm)	Weight (g)
205*230	230	19.8	12	16.5	29.5	90	205	6	767

Grappling Hook

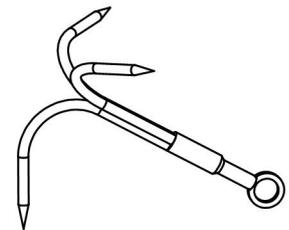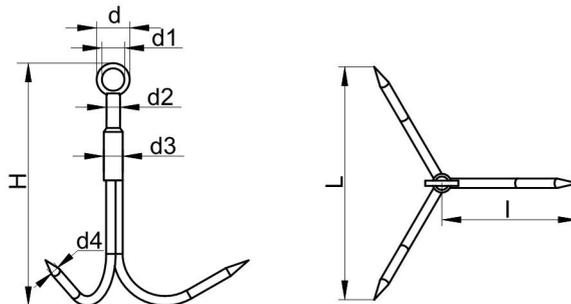

Model	H (mm)	d (mm)	d1 (mm)	d2 (mm)	d3 (mm)	d4 (mm)	l (mm)	L (mm)	Weight (g)
95*115	115	12	17.5	7.5	10	5	54	95	69
130*130	130	14.5	21.5	8.5	12	6	75	130	111
145*190	190	19.5	29.5	11.5	16	8	75	145	291
180*255	255	28	40	16	20	10	90	180	600

PRODUCT INFORMATION

Fishing Magnet Rope



Model	Rope Diameter (mm)	Rope Length (m)	Load (kg)	Weight (g)
D4*10	4	10	110	155
D4*20	4	20	110	260
D4*30	4	30	110	335
D6*10	6	10	180	260
D6*20	6	20	180	445
D6*30	6	30	180	560
D8*10	8	10	320	375
D8*20	8	20	320	790
D8*30	8	30	320	1080

Accessories

Fishing Magnet Toolbox

Model	Weight (g)
32*26.5*12.5cm	700



Accessories

Fishing Magnet Glove

Material
Nylon nitrile



Accessories

Threadlocker

Volume
10ml



PRODUCT INFORMATION


Surface Treatment

Plating Type	Plating Thickness	Colour	Working Temperature	Salt Spray Test	Characteristic
Nickel	10-30µm	Bright Silver	≤200°C	6H-24H	Good performance under saltspray test and constant temperature &
Zinc	5-10µm	Dark Silver	≤160°C	6H-48H	Suitable for common environments.
Electrophoresis	10-30µm	As below colors	≤120°C	48H-72H	Good performance under saltspray test and constant temperature &




PRODUCT INFORMATION

Neodymium pot magnet, with external thread, nickel coating

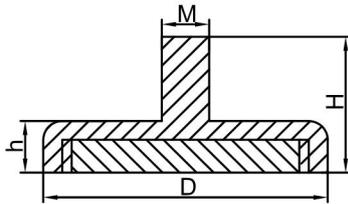

型号 Model	D (mm)	H (mm)	h (mm)	M	Weight (g)	V.P.O.Force (kg)
SNC10	10	14	5	M3	4	2
SNC12	12	14	5	M3	5	4
SNC16	16	13.2	5	M4	8	8
SNC20	20	16	7	M4	17	12
SNC25	25	17	8	M5	30	23
SNC32	32	18.5	8	M6	50	34
SNC36	36	18	8	M6	62	50
SNC42	42	18	8.6	M6	89	72
LNC48	48	24	11	M8	152	81
LNC60	60	28	15	M8	325	160
LNC75	75	35	18	M10	620	250



Neodymium pot magnet, with screwed bush, nickel coating

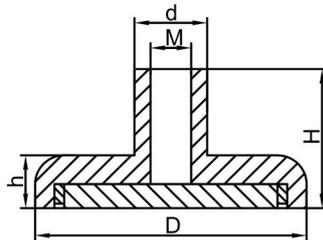

型号 Model	D (mm)	d (mm)	H (mm)	h (mm)	M	Weight (g)	V.P.O.Force (kg)
SND10	10	6	12.5	5	M3	4	2
SND12	12	6	12.5	5	M3	5	4
SND16	16	6.5	12.6	5	M4	9	8
SND20	20	6.5	14	7	M4	17	12
SND25	25	7.5	17	8	M5	31	23
SND32	32	10	18	8	M6	52	34
SND36	36	10	18	8	M6	60	50
SND42	42	10	18	8.6	M6	95	72
LND48	48	12	24	11	M8	160	81
LND60	60	12	28	15	M8	340	160
LND75	75	17	35	18	M10	635	250



PRODUCT INFORMATION

Neodymium pot magnet, with internal thread-metric thread, nickel coating

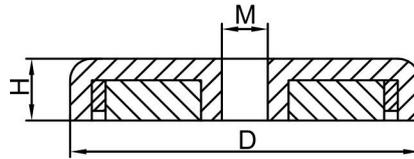

Model	D (mm)	H (mm)	M	Weight (g)	V.P.O.Force (kg)
SNH16	16	5	M3	7	4
SNH20	20	7	M4	14	8
SNH25	25	7.7	M5	25	17
SNH32	32	7.7	M5	44	27
SNH36	36	7.5	M6	55	36
SNH42	42	8.6	M6	86	50
SNH48	48	10.6	M8	132	70
LNH60	60	12	M8	229	140
LNH75	75	15	M10	464	220


Neodymium pot magnet, nickel coating

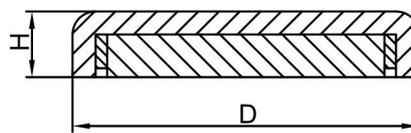

Model	D (mm)	H (mm)	Weight (g)	V.P.O.Force (kg)
SNO16	16	5.2	8	8
SNO20	20	7.2	16	12
SNO25	25	7.7	25	22
SNO32	32	7.8	40	34
SNO36	36	7.6	51	41
SNO40	40	7.8	70	51
SNO42	42	8.8	78	68
SNO48	48	10.8	121	78
SNO60	60	15	245	120
SNO75	75	17.8	485	178


PRODUCT INFORMATION

Rectangular neodymium pot magnet, with counter bore, nickel coating

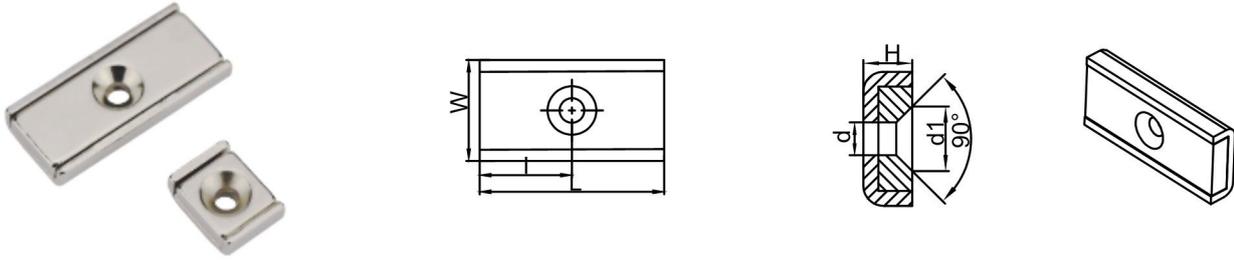

Model	L (mm)	l (mm)	W (mm)	H (mm)	d (mm)	d1 (mm)	Weight (g)	V.P.O.Force (kg)
SNI10	10	5	13.2	5	3.3	6.5	5	4
SNI15	15	7.5	13.2	5	3.3	6.5	7	7
SNI20	20	10	13.2	5	3.3	6.5	10	8
SNI30	30	15	13.2	5	3.3	6.5	15	16


Rectangular neodymium pot magnet, with counter bore, nickel coating

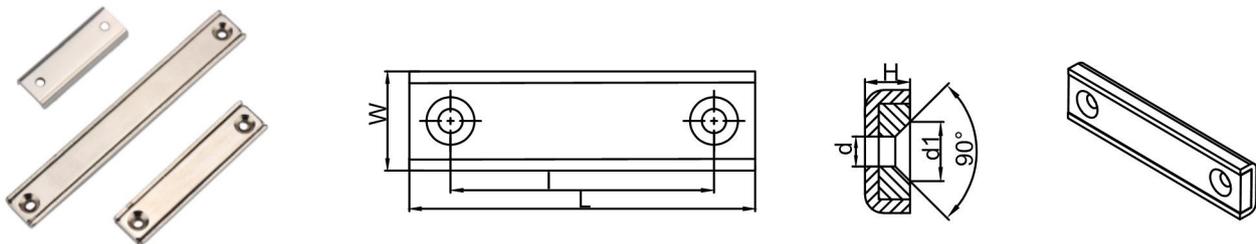

Model	L (mm)	l (mm)	W (mm)	H (mm)	d (mm)	d1 (mm)	Weight (g)	V.P.O.Force (kg)
SNI40	40	30	13.2	5	3.3	6.5	19	17
SNI50	50	40	13.2	5	3.3	6.5	24	27
SNI60	60	50	13.2	5	3.3	6.5	30	30
SNI80	80	70	13.2	5	3.3	6.5	38	33
SNI100	100	90	13.2	5	3.3	6.5	48	36
SNI120	120	110	13.2	5	3.3	6.5	58	40


PRODUCT INFORMATION

Rectangular neodymium pot magnet, with bore, nickel coating

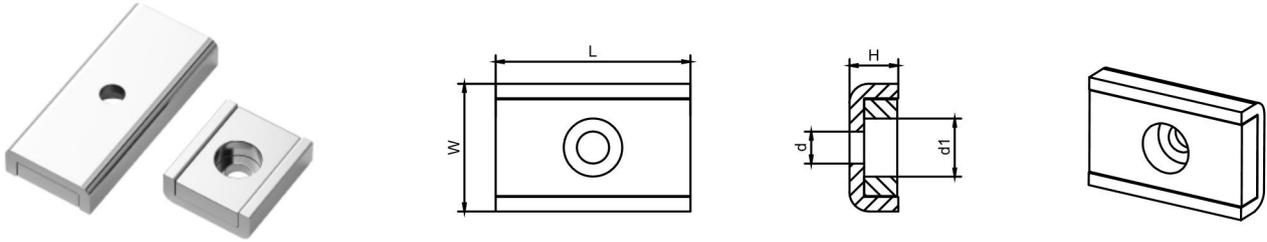

Model	L (mm)	H (mm)	W (mm)	d (mm)	d1 (mm)	Weight (g)	V.P.O.Force (kg)
SNI10-1	10	13.2	5	3.3	6	5	4
SNI15-1	15	13.2	5	3.3	6	7	7
SNI20-1	20	13.2	5	3.3	6	10	8
SNI30-1	30	13.2	5	3.3	6	15	16


Rectangular neodymium pot magnet, with bore, nickel coating

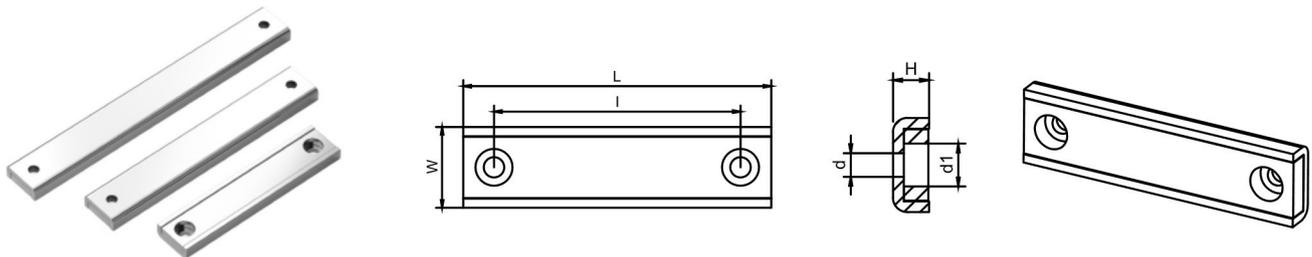

Model	L (mm)	l (mm)	W (mm)	H (mm)	d (mm)	d1 (mm)	Weight (g)	V.P.O.Force (kg)
SNI40-1	40	30	13.2	5	3.3	6	18	17
SNI50-1	50	40	13.2	5	3.3	6	23	27
SNI60-1	60	50	13.2	5	3.3	6	29	30
SNI80-1	80	70	13.2	5	3.3	6	37	33
SNI100-1	100	90	13.2	5	3.3	6	47	36
SNI120-1	120	110	13.2	5	3.3	6	57	40

PRODUCT INFORMATION

Neodymium pot magnet, with internal thread-metric thread, nickel coating

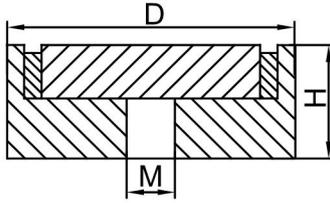

Model	D (mm)	H (mm)	M	Weight (g)	V.P.O.Force (kg)
LNP10	10	8	M3	5	2
LNP12	12	8	M3	7	4
LNP16	16	8	M4	12	8
LNP20	20	10	M4	24	12
LNP25	25	10	M5	37	23
LNP32	32	10	M6	61	34
LNP36	36	10	M6	77	50
LNP42	42	15	M6	158	72
LNP48	48	15	M8	206	81
LNP60	60	15	M8	322	160
LNP75	75	20	M10	672	270