

- Oil-Fired
- 1.7 GPM @ 1200 PSI
- Auto Start/Stop

# 333

The 333 Model is a competitively priced, entry-class hot water pressure washer. Innovative upright design ensures good mobility and ergonomics, while its compact size makes it easy to transport both horizontally and vertically. Built-in 3 angle spray nozzle and low pressure chemical application. Very user-friendly with one-switch operation and areas for hose and accessory storage. This model is ETL safety certified and comes equipped with a 33' high-pressure hose, lance, trigger gun and 16' power cord.




MODEL	PART NO.	GPM	PSI	HP	VOLT/ PH	AMPS	FUEL	BTU/HR	PUMP MODEL	PORTABILITY	DIMENSIONS (LXWXH)	SHIP WT (LBS)	LIST PRICE
333	1.064-049.0	1.7	1200	2.3	115/1	12.5	Oil	80,000	Axial	Std	28"x28"x46"	178	

#### OPTIONS

PART NO.	DESCRIPTION
2.642-305.0	Gutter cleaning lance <i>(image 1)</i> ▶
4.760-245.0	Underbody lance <i>(image 2)</i> ▶
2.883-803.0	Power nozzle for underbody lance, 25° spray angle ▶
6.390-025.0	33' high pressure hose ▶
6.401-459.0	Plug nipple ▶
6.390-028.0	Pipe cleaning hose ▶
4.762-010.0	Wet blasting attachment <i>(image 3)</i> ▶
2.638-526.0	Nozzle kit for wet blasting attachment ▶
2.640-355.0	FR30Me surface cleaner <i>(image 4)</i> ▶
2.640-482.0	Nozzle kit for surface cleaner FR ▶
3.637-170.0	Detergent injector for high pressure ▶

▶ Field Installed    ▶ Factory Installed



#### LEGEND

- ▶ **Factory Installed Options** must be ordered with the machine. They are installed in factory.
- ▶ **Field Installed Options** can be added to a machine at any time. They are installed by the Dealer.



- Oil-Fired
- TEFC Motor
- Flat-Free Tires for Easy Handling
- Stainless Steel Coil Skin

# 500 SERIES & 680SS

**DIRECT DRIVE**

The **500 Series** offers the best of both worlds – powerful cleaning in an affordable package that is both rugged and long lasting. The entire series has been updated to feature a new, bigger frame, large flat free tires, and an ergonomic handle. We've also upgraded the 555HE to Black Label with loads of extra features to go along with its technologically advanced heat exchanger that takes water to higher temperatures. All models are ETL safety certified and feature the best warranties in the business. Each come with a 50' high-pressure hose, lance, nozzles, and trigger gun.



**UPDATED DESIGN!**

Model 555HE



**BLACK LABEL**  
EDITION

MODEL	PART NO.	GPM	PSI	HP	VOLT/PH	AMPS	FUEL	BTU/HR	PUMP MODEL	PORTABILITY	DIMENSIONS (LXWXH)	SHIP WT (LBS)
555HE	1.109-137.0	2.2	1300	2	120/1	20	Oil	185,000	Triplex - HE2126S	Std	42"x29"x42"	385
555SS	1.109-033.0	2.2	1300	2	115/1	20	Oil	214,300	Duplex - HHC165L.1	Std	33"x27"x41.5"	400
560SS	1.109-034.0	2.1	1500	2.3	115/1	20	Oil	214,300	Triplex HF2030SL	Std	33"x26"x44"	405
680SS	1.109-035.0	3	1000	2	115/1	20	Oil	289,900	Triplex - HF2830S	Std	33"x27"x45.5"	440

HE = High Efficiency SS = Stainless Steel

**BUY MORE. SAVE!**

Buy 5 or more 555HEs or 555SSs and save!

**5 = 3% OFF, 10 = 5% OFF**

### NEW MODELS COMING FIRST QUARTER 2024!

	MODEL	PART NO.	GPM	PSI	HP	VOLT/PH	AMPS	FUEL	BTU/HR	PUMP MODEL	PORTABILITY	DIMENSIONS (LXWXH)	SHIP WT (LBS)
<b>NEW</b>	555HE <b>BL</b>	1.109-215.0	2.2	1300	2	120/1	20	Oil	185,000	Triplex - HE2126S	Std	45.5"x29"x42"	385
<b>NEW</b>	555SS	1.109-216.0	2.2	1300	2	120/1	20	Oil	214,300	Triplex - HE2126S	Std	45.5"x29"x39"	400
<b>NEW</b>	560SS	1.109-217.0	2.2	1300	2	120/1	20	Oil	214,300	Triplex - HE2126S	Std	50"x29"x39"	420
<b>NEW</b>	680SS	1.109-218.0	3	1000	2	120/1	20	Oil	289,900	Triplex - HF2830S	Std	45.5"x29"x39"	400

HE = High Efficiency SS = Stainless Steel **BL** = Black Label Model

#### OPTIONS

PART NO.	DESCRIPTION
8.717-764.0	8" Oil-Fired Vent Regulator
8.929-192.0	Float Tank (555HE Only)
8.750-486.0	360° Pivot Reel, 100'
8.903-050.0	100' 3/8" Hose Reel Kit (555HE Only)
8.929-363.0	Exhaust Adapter* (555HE Only)

#### OPTIONS

PART NO.	DESCRIPTION
9.804-624.0	QC Nozzle 3.75, 15° (Yellow) (555HE Only)
9.804-625.0	QC Nozzle 3.75, 25° (Green) (555HE Only)
9.804-626.0	QC Nozzle 3.75, 40° (White) (555HE Only)

▶ Field Installed ▶ Factory Installed

\* NOTE: Must be ordered if the vent regulator [8.717-764.0] is used or the machine is connected to an exhaust stack

- Oil-Fired
- TEFC Motor
- Flat-Free Tires for Easy Handling
- Stainless Steel Coil Skin

# 700 SERIES

## 895SS & 897SS

### BELT DRIVE

The 700 Series offers a nice balance of Hotsy ruggedness and cleaning performance, yet the affordability of an entry-level machine. More powerful yet is the 895SS and 897SS. The 700 series is ideal for meeting the needs of commercial customers. All models are ETL safety certified and feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, lance, nozzles and trigger gun.



**FORGED IN FIRE  
& FULLY LOADED**  
Model 797SS

**BLACK LABEL**  
EDITION



MODEL	PART NO.	GPM	PSI	HP	VOLT/ PH	AMPS	FUEL	BTU/HR	PUMP MODEL	DRIVE	BLACK LABEL	DIMENSIONS (LXWXH)	SHIP WT (LBS)	LIST PRICE
795SS	1.109-039.0	3.5	2000	5	230/1	24	Oil	289,900	HB4025R	Belt		37"x28"x45.5"	455	
797SS <b>BL</b>	1.109-180.0	3.5	2000	5	230/1	24	Oil	289,900	HM3840R.3	Belt	YES	46"x29"x42.5"	510	
797SS-208 <b>BL</b>	1.109-181.0	3.5	2000	5	208/1	27	Oil	289,900	HM3840R.3	Belt	YES	46"x29"x42.5"	513	
897SS <b>BL</b>	1.109-182.0	3.2	3000	6.2	230/1	28	Oil	255,000	HM3840R.3	Belt	YES	37"x28"x45.5"	517	
897SS-208 <b>BL</b>	1.109-183.0	3.2	3000	6.2	208/1	29	Oil	255,000	HM3840R.3	Belt	YES	50"x29"x42.5"	520	

SS = Stainless Steel  
BL = Black Label Model



Model 795SS

#### OPTIONS

PART NO.	DESCRIPTION
8.717-764.0	8" Oil-Fired Vent Regulator
8.750-486.0	360° Pivot Reel, 100'
8.750-483.0	360° Pivot Reel, 200'

▶ Field Installed    ▶ Factory Installed



#### WHAT IS BLACK LABEL?

At Hotsy perfection isn't an endpoint, it is something we strive for daily. We are always thinking of ways to improve our pressure washers. Black Label editions are a prime example. We load them with features that move them to the top of the line. They are loaded with extras like Auto Start/ Stop, robust HM Series Pumps, Beckett Burners, and WEG slow speed motors. The machines have a distinctly classy look with black logos and features that turn heads. **Black Label machines look great and clean even better.**



- Oil-Fired
- Big & Beefy, Yet Easy To Maneuver
- Rugged Hotsy Pump with 7-Year Limited Warranty
- Stainless Steel Coil Skin

# 800 SERIES

## BELT DRIVE

Rugged design, easy maneuverability and massive cleaning power. Comparable to the cleaning power of Hotsy's heavy-duty stationary units, the big and beefy 800 Series is surprisingly easy to maneuver into place, allowing you to tackle the heaviest of industrial cleaning jobs. The 28" wide wheel base helps with stability, yet is narrow enough to fit easily through doorways. Components are protected by an easy-to-remove cover allowing servicing access. All models are ETL safety certified and feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, lance, nozzles and trigger gun.



Shown with optional hose reel

U.S. Design Patent No. 726,382 S



Optional Detergent Bucket Bracket



MODEL	PART NO.	GPM	PSI	HP	MOTOR RPM	VOLT/ PH	AMPS	FUEL	BTU/HR	PUMP MODEL	PORTABILITY	DIMENSIONS (LXWXH)	SHIP WT (LBS)
821	1.109-120.0	4.0	2300	6.2	3450	208/1	33	Oil	381,000	HM4045R.3	Std	51"x28"x51"	632
843	1.109-122.0	3.5	2000	5	1725	230/1	29	Oil	381,000	HM4030R.3	Std	51"x28"x51"	622
845	1.109-124.0	3.5	2000	5	1725	460/3	10	Oil	381,000	HM4030R.3	Std	51"x28"x51"	691
851	1.109-125.0	4.0	3000	8.2	3450	208/1	44	Oil	381,000	HM4045R.3	Std	51"x28"x51"	675
853	1.109-127.0	4.0	3000	7.5	1725	230/1	37	Oil	381,000	HM4030R.3	Std	51"x28"x51"	665
854	1.109-128.0	4.0	3000	7.5	1725	230/3	25	Oil	381,000	HM4030R.3	Std	51"x28"x51"	665
855	1.109-129.0	4.0	3000	7.5	1725	460/3	14	Oil	381,000	HM4030R.3	Std	51"x28"x51"	665
856	1.109-130.0	4.0	3000	8.2	3450	575/3	11	Oil	381,000	HM4045R.3	Std	51"x28"x51"	680
873	1.109-131.0	5.0	3000	10	1725	230/1	42	Oil	404,000	HM4030R.3	Std	51"x28"x51"	670
874	1.109-132.0	5.0	3000	10	1770	230/3	29	Oil	404,000	HM4030R.3	Std	51"x28"x51"	675

OPTIONS	
PART NO.	DESCRIPTION
8.930-170.0	Auto Start/Stop Kit* ▶
8.930-172.0	Thermal Shutdown Kit ▶
8.930-171.0	Time Delay Shutdown* ▶
8.717-764.0	8" Oil-Fired Vent Regulator ▶

OPTIONS	
PART NO.	DESCRIPTION
8.750-486.0	360° Pivot Reel, 100' ▶
8.750-483.0	360° Pivot Reel, 200' ▶
8.754-435.0	Pneumatic Wheel ▶
8.923-225.0	Detergent Bucket Bracket ▶

\* Note: Time Delay Shutdown and Auto Start/Stop cannot be combined on the same machine.

▶ Field Installed    ▶ Factory Installed

- NG- or LP-Fired
- 115V/1PH or 230V/1 PH
- Hotsy Direct-Drive Pump
- Flat-Free Tires for Easy Handling

Model 771-Propane (shown with optional Portagear. Propane tank not included.)



# LP/NG SERIES

## DIRECT DRIVE

These hot water washers are heated with either LP or NG, and offer cleaning power up to 1500 PSI. All models are ETL safety certified and feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, lance, nozzles and trigger gun.

Model 558-Propane (shown with optional Portagear. Propane tank not included.)



MODEL	PART NO.	GPM	PSI	HP	VOLT/PH	AMPS	FUEL	BTU/HR	PUMP MODEL	DRIVE	DIMENSIONS (LXWXH)	SHIP WT (LBS)
558	1.109-610.0	2.2	1300	2	115/1	18	LP	214,300	Duplex - HHC165L.1	Direct	31.5"x26"x41"	350

MODEL	PART NO.	GPM	PSI	HP	VOLT/PH	AMPS	FUEL	BTU/HR	PUMP MODEL	DRIVE	DIMENSIONS (LXWXH)	SHIP WT (LBS)
771	1.109-611.0	3.0	1500	3	230/1	13	LP	280,000	HF2830S	Direct	32"x27"x45.5"	415
772	1.109-037.0	3.0	1500	3	230/1	13	NG	338,000	HF2830S	Direct	32"x27"x45.5"	415

Portability is optional on these models unless ordered with the portagear kit PN 8.903-049.0.

**OPTIONS**

PART NO.	DESCRIPTION
8.717-728.0	8" LP Gas-Fired Draft Diverter
8.903-049.0	Portagear Kit

▶ Field Installed   
 ▶ Factory Installed

**See PAGE 36 for other configured options thru the SPECIALS DEPARTMENT.**



- LP-or Natural Gas-Fired
- Hotsy Belt-Drive Pump
- Remote-Ready
- Smart Relay Control provides control over run time, auto start/stop and shut down functionality

# 900/1400 SERIES



## BELT DRIVE

Hotsy's 900/1400 Series of innovative stationary models just got a major makeover. With a new frame design that gives it the classic Hotsy look, the series features upgrades that make this already reliable machine an even better workhorse, with extended accessibility. Some of the upgrades include a larger, more robust pump, an accessible and adjustable thermostat, dual v-belt for more efficient power transmission, a built in hose reel mount, and a float tank which helps maintain a constant water pressure. The most impressive is the programmable smart control automation. Every model has the option of a Black Label upgrade, including a draft diverter, 100' of hose, and a hose reel. All models are ETL safety certified and feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, lance, nozzles and trigger gun.



## 900/1400 SERIES OPTIONS

**900/1400 SERIES BLACK LABEL**  
 At Hotsy, perfection isn't an end-point, it is something we strive for daily. We are always thinking of ways to improve our pressure washers. The Black Label edition 900/1400 Series machines are a prime example. We load them with features that move them to the top of the line. The 900/1400 boasts a 100' Hose & Reel, Water Inlet Solenoid, Drip Pan, Float Tank Cover, & Draft Diverter. On top of that we've given the machine a distinctly classy look with black logos, so it looks good and cleans even better. **You get the revitalized 900/1400 fully loaded!**

**BLACK LABEL**  
EDITION

OPTIONS	
PART NO.	DESCRIPTION
8.916-989.0	Remote Station (image 1 above) ▶
8.916-988.0	Soap Solenoid and Switch ▶
8.717-728.0	8" Natural Gas- or LP Gas-Fired Draft Diverter ▶
9.803-452.0	Water Inlet Solenoid ▶
8.755-253.0	8" Power Dampener ▶
8.749-807.0	Power Dampener Wiring Harness ▶

OPTIONS	
PART NO.	DESCRIPTION
8.924-814.0	R-Con Wireless Remote Kit (1 remote/1 receiver) (image 2 above) ▶
8.925-072.0	R-Con Wireless Remote Kit (2 remotes/1 receiver) ▶
8.924-878.0	Wall Mount Remote Bracket for R-Con (image 3 above) ▶
8.756-329.0♦	Replacement Remote (transmitter only) ▶
8.931-988.0	Black Label Kit ▶

▶ Field Installed    ▶ Factory Installed

♦ **Please Note: R-Con Wireless Remote** comes from vendor, is custom made to order and is not universal. When ordering, please contact customer service to supply the serial number off the transmitter you have along with the channel number, so we can pass along that information to the vendor.

MODEL	PART NO.	GPM	PSI	HP	MOTOR RPM	VOLT/ PH	AMPS	FUEL	BTU/HR	PUMP MODEL	DIMENSIONS (LXWXH)*	SHIP WT (LBS)
921P	1.109-184.0	4.0	2300	6.2	3450	208/1	32	LP	364,835	HM4035R.3	51.75"x21.3"x51.5"	691
921N	1.109-185.0	4.0	2300	6.2	3450	208/1	32	NG	364,835	HM4035R.3	51.75"x21.3"x51.5"	691
926P	1.109-186.0	4.0	2000	5	1800	575/3	7	LP	364,835	HM4035R.3	51.75"x21.3"x51.5"	647
926N	1.109-187.0	4.0	2000	5	1800	575/3	7	NG	364,835	HM4035R.3	51.75"x21.3"x51.5"	647
942P	1.109-188.0	4.0	2000	5	1725	208/3	18	LP	360,997	HM4035R.3	51.75"x21.3"x51.5"	647
942N	1.109-189.0	4.0	2000	5	1725	208/3	18	NG	364,835	HM4035R.3	51.75"x21.3"x51.5"	647
943P	1.109-190.0	4.0	2000	5	1725	230/1	25	LP	360,997	HM4035R.3	51.75"x21.3"x51.5"	691
943N	1.109-191.0	4.0	2000	5	1725	230/1	25	NG	364,835	HM4035R.3	51.75"x21.3"x51.5"	691
944P	1.109-192.0	4.0	2000	5	1725	230/3	16	LP	360,997	HM4035R.3	51.75"x21.3"x51.5"	647
944N	1.109-193.0	4.0	2000	5	1725	230/3	16	NG	364,835	HM4035R.3	51.75"x21.3"x51.5"	647
945P	1.109-194.0	4.0	2000	5	1725	460/3	8	LP	360,997	HM4035R.3	51.75"x21.3"x51.5"	647
945N	1.109-195.0	4.0	2000	5	1725	460/3	8	NG	364,835	HM4035R.3	51.75"x21.3"x51.5"	647

MODEL	PART NO.	GPM	PSI	HP	MOTOR RPM	VOLT/ PH	AMPS	FUEL	BTU/HR	PUMP MODEL	DIMENSIONS (LXWXH)	SHIP WT (LBS)
1451P	1.109-196.0	4.0	3000	8.2	3450	208/1	39	LP	364,835	HM4035R.3	51.75"x21.3"x51.5"	695
1451N	1.109-197.0	4.0	3000	8.2	3450	208/1	39	NG	364,835	HM4035R.3	51.75"x21.3"x51.5"	695
1452P	1.109-198.0	4.0	3000	7.5	1725	208/3	24	LP	360,997	HM4035R.3	51.75"x21.3"x51.5"	692
1452N	1.109-199.0	4.0	3000	7.5	1725	208/3	24	NG	364,835	HM4035R.33	51.75"x21.3"x51.5"	692
1453P	1.109-200.0	4.0	3000	7.5	1725	230/1	34	LP	360,997	HM4035R.3	51.75"x21.3"x51.5"	724
1453N	1.109-201.0	4.0	3000	7.5	1725	230/1	34	NG	364,835	HM4035R.3	51.75"x21.3"x51.5"	724
1454P	1.109-202.0	4.0	3000	7.5	1725	230/3	24	LP	360,997	HM4035R.3	51.75"x21.3"x51.5"	690
1454N	1.109-203.0	4.0	3000	7.5	1725	230/3	24	NG	364,835	HM4035R.3	51.75"x21.3"x51.5"	690
1455P	1.109-204.0	4.0	3000	7.5	1725	460/3	12	LP	360,997	HM4035R.3	51.75"x21.3"x51.5"	690
1455N	1.109-205.0	4.0	3000	7.5	1725	460/3	12	NG	364,835	HM4035R.3	51.75"x21.3"x51.5"	690
1456P	1.109-206.0	4.0	3000	8.2	3450	575/3	10	LP	364,835	HM4035R.3	51.75"x21.3"x51.5"	690
1456N	1.109-207.0	4.0	3000	8.2	3450	575/3	10	NG	364,835	HM4035R.3	51.75"x21.3"x51.5"	690
1473P	1.109-208.0	5.0	3000	10	1725	230/1	42	LP	378,617	HM4035R.3	51.75"x21.3"x51.5"	722
1473N	1.109-209.0	5.0	3000	10	1725	230/1	42	NG	390,025	HM4035R.3	51.75"x21.3"x51.5"	722
1474P	1.109-210.0	5.0	3000	10	1770	230/3	29	LP	378,617	HM4035R.3	51.75"x21.3"x51.5"	699
1474N	1.109-211.0	5.0	3000	10	1770	230/3	29	NG	390,025	HM4035R.3	51.75"x21.3"x51.5"	699
1475P	1.109-212.0	5.0	3000	10	1725	208/3	34	LP	378,617	HM4035R.3	51.75"x21.3"x51.5"	698
1475N	1.109-213.0	5.0	3000	10	1725	208/3	34	NG	378,617	HM4035R.3	51.75"x21.3"x51.5"	698
1476P	1.109-219.0	5.0	3000	10	1725	460/3	34	LP	378,617	HM4035R.3	51.75"x21.3"x51.5"	699
1476N	1.109-220.0	5.0	3000	10	1725	460/3	34	NG	378,617	HM4035R.3	51.75"x21.3"x51.5"	699

**NEW!****NEW!**

\* includes connectors and flue outlet

**Added Accessibility and Flexibility Make the New 900/1400 Series a Must-Have!**





- Oil, Natural Gas or optional LP-Fired
- Remote-ready
- Hotsy Belt Drive Pump
- Stainless Steel Coil Skin
- Smart Relay Control provides control over run time, auto start/stop and shut down functionality

# 1800 SERIES

## BELT DRIVE

The 1800 Series provides stationary cleaning with hot water indoors. The 7 models are electric-powered and natural gas, oil or optional LP gas-heated. The coil skin comes standard with stainless steel. The sleek cabinet has removable side and front panels, making it easy for routine scheduled maintenance and service. The Smart Relay allows the washer to be customized to individual needs, and is protected behind the front panel. All models are ETL safety certified and feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, lance, nozzles and trigger gun.



MODEL	PART NO.	GPM	PSI	HP	VOLT/PH	AMPS	FUEL	BTU/HR	PUMP MODEL	DIMENSIONS (LXWXH)	SHIP WT (LBS)
1812SS	1.109-660.0	6.0	2500	10	230/1	42	NG	558,050	HX9536L.2	51"x31"x53.25"	1,020
1830SS	1.109-665.0	6.0	3000	15	230/3	40	Oil*	579,776	HX9536L.2	51"x31"x53.25"	1,020
1832SS	1.109-662.0	6.0	3000	15	230/3	38	NG	558,050	HX9536L.2	51"x31"x53.25"	1,020
1832SS-208	1.109-661.0	6.0	3000	15	208/3	41	NG	558,050	HX9536L.2	51"x31"x53.25"	1,020
1833SS	1.109-666.0	6.0	3000	15	460/3	21	Oil*	579,776	HX9536L.2	51"x31"x53.25"	1,020
1835SS	1.109-663.0	6.0	3000	15	460/3	19	NG	558,050	HX9536L.2	51"x31"x53.25"	1,020
1836SS	1.109-664.0	6.0	3000	15	575/3	16	NG	558,050	HX9536L.2	51"x31"x53.25"	1,020

\*Oil-fired models are not supplied with a fuel tank

### OPTIONS

PART NO.	DESCRIPTION
8.916-989.0	Remote Station (image 1 below)
8.916-988.0	Soap Solenoid and Switch
8.749-806.0	10" Power Dampener
8.749-807.0	Power Dampener Wiring Harness
9.801-040.0	10" Natural Gas- or LP Gas-Fired Draft Diverter

### OPTIONS

PART NO.	DESCRIPTION	LIST PRICE
9.803-452.0	Water Inlet Solenoid	
8.924-814.0	R-Con Wireless Remote Kit (1 remote /1 receiver) (image 2 below)	
8.925-072.0	R-Con Wireless Remote Kit (2 remotes/1 receiver)	
8.924-878.0	Wall Mount Remote Bracket for R-Con (image 3 below)	
8.756-329.0*	Replacement Remote (transmitter only)	
8.903-074.0	LP Conversion Kit	

Field Installed Factory Installed

\* Please Note: R-Con Wireless Remote comes from vendor, is custom made to order and is not universal. When ordering, please contact customer service to supply the serial number off the transmitter you have along with the channel number, so we can pass along that information to the vendor.



See PAGE 36 for other configured options thru the SPECIALS DEPARTMENT.



- Oil, Natural Gas or optional LP-Fired
- Remote-ready
- Hotsy Belt Drive Pump
- Stainless Steel Coil Skin
- Smart Relay Control provides control over run time, auto start/stop and shut down functionality

# 5700/5800 SERIES

## BELT DRIVE

The 5700 and 5800 Series produces a powerful punch and is ideal for wash bay installations. With its 20 HP motor driving the incomparable Hotsy Triplex Pump and a vertical banded belt, the 5700 and 5800 Series delivers cleaning power up to 9.5 GPM and 3000 PSI. Has a sleek cabinet with removable panels for easy access for maintenance. A removable control panel provides access to the adjustable temperature control and the Smart Relay for secured control of operating positions. Remote ready for wash bay installations. All models are ETL safety certified and feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, lance, nozzles and trigger gun.



MODEL	PART NO.	GPM	PSI	HP	VOLT/PH	AMPS	FUEL	BTU/HR	PUMP MODEL	HOSE (FT)	DIMENSIONS (LXWXH)	SHIP WT (LBS)
5730SS	1.109-658.0	8.0	3000	20	230/3	44	Oil*	768,000	HX9536L.2	50	51"x31"x63.4"	1,471
5732SS-208	1.109-654.0	8.0	3000	20	208/3	55	NG	720,450	HX9536L.2	50	51"x31"x63.4"	1,471
5732SS	1.109-655.0	8.0	3000	20	230/3	42	NG	720,450	HX9536L.2	50	51"x31"x63.4"	1,471
5733SS	1.109-659.0	8.0	3000	20	460/3	23	Oil*	768,000	HX9536L.2	50	51"x31"x63.4"	1,471
5735SS	1.109-656.0	8.0	3000	20	460/3	21	NG	720,450	HX9536L.2	50	51"x31"x63.4"	1,471
5736SS	1.109-657.0	8.0	3000	20	575/3	16	NG	720,450	HX9536L.2	50	51"x31"x63.4"	1,471
5832SS	1.109-651.0	9.5	2500	20	230/3	42	NG	939,890	HX1036L.2	50	51"x31"x63.4"	1,471
5832SS-208	1.109-650.0	9.5	2500	20	208/3	48	NG	939,890	HX1036L.2	50	51"x31"x63.4"	1,471
5835SS	1.109-652.0	9.5	2500	20	460/3	21	NG	939,890	HX1036L.2	50	51"x31"x63.4"	1,461
5836SS	1.109-653.0	9.5	2500	20	575/3	16	NG	939,890	HX1036L.2	50	51"x31"x63.4"	1,471

\*Oil-fired models are not supplied with a fuel tank

OPTIONS	
PART NO.	DESCRIPTION
8.753-171.0	12" Power Dampener
8.749-807.0	Power Dampener Wiring Harness
9.803-452.0	Water Inlet Solenoid
8.916-989.0	Remote Station (image 1 below)
8.916-988.0	Soap Solenoid and Switch
8.717-730.0	12" Natural Gas- or LP Gas-Fired Draft Diverter

OPTIONS		
PART NO.	DESCRIPTION	LIST PRICE
8.924-814.0	R-Con Wireless Remote Kit (1 remote/1 receiver) (image 2 below)	
8.925-072.0	R-Con Wireless Remote Kit (2 remotes/1 receiver)	
8.924-878.0	Wall Mount Remote Bracket for R-Con (image 3 below)	
8.756-329.0	Replacement Remote (transmitter only)	
8.916-916.0	LP Conversion Kit, 5700	
8.916-915.0	LP Conversion Kit, 5800	

▶ Field Installed    ▶ Factory Installed

• **Please Note: R-Con Wireless Remote** comes from vendor, is custom made to order and is not universal. When ordering, please contact customer service to supply the serial number off the transmitter you have along with the channel number, so we can pass along that information to the vendor.



**See PAGE 37 for other configured options thru the SPECIALS DEPARTMENT.**




- Oil-Fired
- 12 Volt DC
- Hotsy Belt & Direct-Drive Pump
- Stainless Steel Coil Skin
- 3 Battery-less Models
- 2 Electric-Start Models
- Flat-Free Tires for Easy Handling

# GAS ENGINE ROLL CAGE SERIES

**DIRECT DRIVE**   **BELT DRIVE**

The Gas Engine Series consists of the most compact and portable hot water pressure washers on the market. Powered by reliable gasoline engines, all you need is water and you can clean anywhere anytime. The five models offer a broad range of cleaning power, from 2.7 to 4.0 GPM and from 2400 to 3500 PSI. All models are ETL safety certified and feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, lance, nozzles and trigger gun.

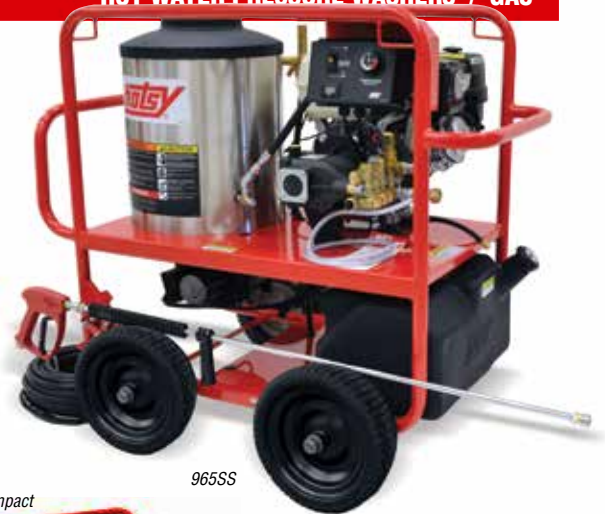

965SS

1075BE Compact



1075SSE



### DIRECT DRIVE MODELS

MODEL	PART NO.	GPM	PSI	ENGINE/MODEL	CCs	BURNER	BTU/HR	PUMP MODEL	PORT-ABILITY	DIMENSIONS (LXWXH)	SHIP WT (LBS)
871SS*	1.110-014.0	2.7	2400	Honda GX200	196	12V DC	248,500	HP3035G	Std	43"x27"x39"	410
965SS CAL*	1.110-090.0	3.0	3000	Vanguard 400	408	12V DC	248,500	HP3035G	Std	47"x31"x41"	445
1065SSE CAL†	1.110-089.0	3.5	3000	Vanguard 400	408	12V DC	309,900	HS3540G.3	Std	47"x31"x45"	510
1075SSE†	1.110-012.0	4.0	3500	Honda GX390	389	12V DC	309,900	HS4040G.3	Std	47"x31"x45"	520
1075SSE CAL†	1.110-080.0	4.0	3500	Vanguard 400	408	12V DC	309,900	HS4040G.3	Std	47"x31"x45"	520

### BELT DRIVE MODELS

1075BE Compact†	1.110-088.0	4.0	3500	Vanguard 400	408	12V DC	309,900	HM4035	Std	47"x31"x45"	520
1075BE Compact†	1.110-099.0	4.0	3500	Honda GX390	389	12V DC	309,900	HM4035	Std	47"x31"x45"	520

\*Battery not required  
† 12V battery required, but not supplied  
E = Electric-start engine  
B = Belt Drive

- Oil-Fired
- 12 Volt DC
- Hotsy Belt-Drive Pump
- 4 Electric-Start Models

# GAS ENGINE SERIES

## BELT DRIVE

The belt drive versions of the Gas Engine Series provide versatility with the roll cage design. Designed to fit the needs of the end-user, this versatile hot water washer converts easily to a skid unit, portable with wheels or a wheel/caster kit, or can be mounted on a trailer. Powered by reliable gasoline engines, the four models offer a broad range of cleaning power, from 4.0 to 4.6 GPM and from 3500 PSI. All models are ETL safety certified and feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, lance, nozzles and trigger gun.



1075BE  
(shown with optional  
caster wheel kit)



965B (shown with optional  
flat-free tires)



1080BE (shown with optional stainless  
steel coil wrap and skid rails)



MODEL	PART NO.	GPM	PSI	ENGINE MODEL	CCs	BURNER	BTU/HR	PUMP MODEL	PORTABILITY	DIMENSIONS (LXWXH)	SHIP WT (LBS)
1075BE†	1.110-566.0	4.0	3500	Honda GX390	389	12V DC	385,800	HM4035L.3	Optional	42"x27.5"x39"	625
1075BE CAL†	1.110-082.0	4.0	3500	Vanguard 400	408	12V DC	385,800	HM4035L.3	Optional	42"x27.5"x39"	625
1080BE†	1.110-567.0	4.6	3500	Vanguard 18	570	12V DC	385,800	HM4035L.3	Optional	42"x27.5"x39"	665
1080BEK†	1.110-094.0	4.6	3500	LC2V80F-D	764	12V DC	385,800	HM4035L.3	Optional	42"x27.5"x39"	665

\* Battery not required  
† 12V battery required, but not supplied

E = Electric-start engine  
B = Belt Drive

OPTIONS	
PART NO.	DESCRIPTION
8.916-172.0	Float Tank Kit (includes high pressure detergent kit) ▶
8.931-259.0	Skid Rail Kit - adds 3.875" to height ▶
8.931-260.0	Caster Kit - 2 casters / 2 wheels - adds 7.5" to height ▶
8.931-261.0	Flat-free Tire Kit with Handle Bar - adds 10" to width, 6" to height ▶
8.916-175.0	High Pressure Detergent (to be used with a remote water tank) ▶
8.915-274.0	Stainless Steel Coil Wrap ▶

▶ Field Installed    ▶ Factory Installed

**See PAGE 38 for other configured options thru the SPECIALS DEPARTMENT.**



- Gas/Diesel-Powered
- Oil-Fired
- Hotsy Belt-drive Pump
- Stainless Steel Coil Skin
- Electric Start

# 1200 SERIES

## BELT DRIVE

The 1200 Series delivers some serious on-site, hot water cleaning capability of up to 8 GPM and 4000 PSI. Rugged gasoline engines all have electric start. Eleven models come with a 2400W generator. The self-contained cleaning units are built to hold up under the toughest of conditions. All models are ETL safety certified and feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, lance, nozzles and trigger gun.



MODEL	PART NO.	GPM	PSI	ENGINE MODEL	FUEL	CCs	BURNER	BTU/HR	PUMP MODEL	DIMENSIONS (LXWXH)	SHIP WT (Lbs)	LIST PRICE
1260SSK	1.110-091.0	4.7	3500	LC2V80F-D	Gas	764	12V DC	414,318	HM4035R.2	45"x33"x52"	755	
1260SSGK*	1.110-093.0	4.7	3500	LC2V80F-D	Gas	764	120V AC	414,318	HM4035R.2	45"x33"x52"	840	
1260SS	1.110-533.0	4.7	3500	Briggs VAN 18	Gas	570	12V DC	414,318	HM4035R.2	45"x33"x52"	745	
1260SSG*	1.110-535.0	4.7	3500	Briggs VAN 18	Gas	570	120V AC	414,318	HM4035R.2	45"x33"x52"	830	
1265SSD	1.110-073.0	4.7	3500	Kubota Z602-E4B	Diesel	599	12V DC	414,318	HM4035	45"x33"x52"	795	
1265SSDS**	1.110-074.0	4.7	3500	Kubota Z602-E4B	Diesel	599	12V DC	414,318	HM4035	45"x33"x52"	795	
1270SS	1.110-557.0	4.5	4000	Honda GX630	Gas	688	12V DC	414,318	HX5843R.2	45"x33"x52"	855	
1270SSG*	1.110-536.0	4.5	4000	Honda GX630	Gas	688	120V AC	414,318	HX5843R.2	45"x33"x52"	870	
1270SSG-PR*	1.110-079.0	4.5	4000	Honda GX630	Gas	688	12V DC	414,318	HX5843R.2	45"x33"x52"	870	
1270SSK	1.110-092.0	4.5	4000	LC2V80F-D	Gas	764	12V DC	414,318	HX5843R.2	45"x33"x52"	865	
1270SSGK*	1.110-107.0	4.5	4000	LC2V80F-D	Gas	764	120V AC	414,318	HX5843R.2	45"x33"x52"	880	
1280SS	1.110-558.0	5.1	3500	Honda GX630	Gas	688	12V DC	414,318	HX8043R.2	45"x33"x52"	760	
1280SSG*	1.110-537.0	5.1	3500	Honda GX630	Gas	688	120V AC	414,318	HX8043R.2	45"x33"x52"	750	
1280SSK	1.110-108.0	5.1	3500	LC2V80F-D	Gas	764	12V DC	414,318	HX8043R.2	45"x33"x52"	770	
1280SSGK*	1.110-109.0	5.1	3500	LC2V80F-D	Gas	764	120V AC	414,318	HX8043R.2	45"x33"x52"	760	
1290SS	1.110-538.0	5.6	3000	Honda GX630	Gas	688	12V DC	456,344	HX8043R.2	45"x33"x52"	744	
1290SSG*	1.110-539.0	5.6	3000	Honda GX630	Gas	688	120V AC	456,344	HX8043R.2	45"x33"x52"	905	
1291SS	1.110-075.0	8.0	3000	Honda GX690	Gas	688	12V DC	407,826	HX9536R	45"x33"x52"	760	
1291SSG*	1.110-076.0	8.0	3000	Honda GX690	Gas	688	120V AC	407,826	HX9536R	45"x33"x52"	920	
1290SSK	1.110-110.0	5.6	3000	LC2V80F-D	Gas	764	12V DC	456,344	HX8043R.2	45"x33"x52"	754	
1290SSGK*	1.110-111.0	5.6	3000	LC2V80F-D	Gas	764	120V AC	456,344	HX8043R.2	45"x33"x52"	915	
1291SSK	1.110-112.0	8.0	3000	LC2V80F-D	Gas	764	12V DC	407,826	HX9536R	45"x33"x52"	770	
1291SSGK*	1.110-113.0	8.0	3000	LC2V80F-D	Gas	764	120V AC	407,826	HX9536R	45"x33"x52"	930	

\* Models include a 2400W generator / \*\*Models include a stainless steel frame / 12V battery required for all models, but not supplied

### OPTIONS

PART NO.	DESCRIPTION
8.903-025.0	Portagear Kit (all models)

▶ Field Installed    ▶ Factory Installed

See PAGE 38 for other configured options thru the SPECIALS DEPARTMENT.

- Diesel-Powered
- Diesel-Fired
- Hotsy Belt-drive Pump
- Stainless Steel Coil Skin
- Electric Start

# HSS & HSDS SUPERSKID SERIES

## BELT DRIVE

The Super Skid HSS Series is by far, the largest and most powerful of Hotsy's hot water pressure washers. The Super Duty HSDS models feature a Hawk pump with lower RPM for long lasting durability; there's literally nothing else on the market as robust, big & powerful. HSS models come standard with the reliable Hotsy triplex belt-driven high-pressure pump. Triple banded belt for more efficient power transmission. Models are powered by a 16 & 24 HP Kubota engines with electric start and all feature a 3/4-inch foil-backed insulated Schedule 80 heating coil with stainless steel skin and 5-year warranty. Two fuel tanks for longer operation, a high-efficiency Wayne burner and optional dual gun kit allows two users at one time. All models are ETL safety certified and feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, lance, nozzles and trigger gun.



MODEL	PART NO.	GPM	PSI	ENGINE MODEL	CCs	BURNER	BTU/HR	PUMP MODEL	HOSE	DIMENSIONS (LXWXH)	SHIP WT (LBS)
HSS-503069E	1.110-604.0	5.0	3000	Kubota Z602-E4B	599	12V DC	465,000	HX5843R.2	50'-3/8"	73"x37"x64"	1305
HSS-653569E	1.110-605.0	6.5	3500	Kubota D1105-E4B	1123	12V DC	565,000	HX8043R.2	50'-3/8"	73"x37"x64"	1710
HSS-803069E	1.110-606.0	8.0	3000	Kubota D1105-E4B	1123	12V DC	635,000	HX9536.2	50'-1/2"	73"x37"x64"	1715
HSS-952569E	1.110-607.0	9.5	2500	Kubota D1105-E4B	1123	12V DC	780,000	HX1036R.2	50'-1/2"	73"x37"x64"	1715

All models are Electric Start. 12V battery is required for all models, but is not supplied.

### SUPER DUTY MODELS:

MODEL	PART NO.	GPM	PSI	ENGINE MODEL	CCs	BURNER	BTU/HR	PUMP MODEL	HOSE	DIMENSIONS (LXWXH)	SHIP WT (LBS)
HSDS-503069E	1.110-616.0	5.0	3000	Kubota Z602-E4B	599	12V DC	465,000	HHP2750R	50'-3/8"	73"x37"x64"	1610
HSDS-653569E	1.110-617.0	6.5	3500	Kubota D1105-E4B	1123	12V DC	565,000	HHP3650R	50'-3/8"	73"x37"x64"	2005
HSDS-803069E	1.110-618.0	8.0	3000	Kubota D1105-E4B	1123	12V DC	635,000	HFR40FR	50'-1/2"	73"x37"x64"	2015
HSDS-952569E	1.110-619.0	9.5	2500	Kubota D1105-E4B	1123	12V DC	780,000	HFR60FR	50'-1/2"	73"x37"x64"	2020

All models are Electric Start. 12V battery is required for all models, but is not supplied.

#### OPTIONS

PART NO.	DESCRIPTION
8.923-164.0	Dual Gun Kit - includes necessary fittings, extra hose gun and wand <span style="float: right;">▶</span>
8.923-125.0	Steam Kit - includes necessary fittings and panel mount control valve <span style="float: right;">▶</span>
8.923-124.0	Float Tank Kit - includes float tank, necessary fittings and panel mount detergent metering valve <span style="float: right;">▶</span>

▶ Field Installed    ▶ Factory Installed



**Pump size comparison:**  
The HFR and HHP pumps from Leuco used in the Super Duty models dwarf the standard HX.



- All-Electric
- Hotsy Belt-drive Pump
- Auto Start/Stop

# HWE SERIES ALL-ELECTRIC

## BELT DRIVE

The HWE Series is powered and heated by electricity, making it ideal for indoor use. It's a quiet machine with no fumes, making it ideal for food service and in-plant cleaning. Water is heated in a stainless steel heating coil, immersed in a tank of water solution, allowing for instant hot water once you pull the trigger. The heating elements do not come in contact with the pressurized water, which results in less maintenance and minimizes scale build up. All models are ETL safety certified and feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, insulated variable pressure wand, nozzles and trigger gun.



MODEL	PART NO.	GPM	PSI	HP	MOTOR	AMPS	VOLT/PH	KvA HOUR	BTU/HR	PUMP MODEL	DIMENSIONS (LXWXH)	SHIP WT (LBS)
HWE-402009C	1.109-646.0	4.0	2000	6.2	Baldor	55	460/3	40.5	138,308	HM4030R.3	34"x25"x52"	620
HWE-403009C	1.109-647.0	3.5	3000	7.5	WEG	59	460/3	40.5	138,308	HM4030R.3	34"x25"x52"	640
HWE-402009F	1.109-958.0	3.5	2000	5	Baldor	46	575/3	40.5	138,308	HM4030R.3	34"x25"x52"	620
HWE-403009F	1.109-959.0	3.5	3000	7.5	Baldor	49	575/3	40.5	138,308	HM4030R.3	34"x25"x52"	640

### OPTIONS

PART NO.	DESCRIPTION
8.903-042.0	Option, 1700 SS Base & Cover Cabinet
8.925-520.0	Option, Time Delay Shut Down*

▶ Field Installed    ▶ Factory Installed

**See PAGE 35 for stainless steel and other configured options thru the Specials Dept. 575V/3Ph models only available as base unit through standard production. If adding options, go through SPECIALS DEPARTMENT.**

- Diesel
- Kerosene
- Home Heating Oil
- Natural Gas
- LP Gas (optional)

# 9400 SERIES

The 9400 Series heating modules offer the flexibility to “convert” a cold water pressure washer into a hot water unit. By attaching the heating module to a cold water pressure washer the pressurized water is now heated to produce all the benefits of hot water cleaning. The four models use fuel oil, diesel or natural gas to heat the water using Hotsy’s high-efficiency, vertical heating coil. All models are ETL safety certified and come equipped with a flow switch to control the burner.



Model 9462



Model 9452



MODEL	PART NO.	PSI (MAX)	GPM (MAX)	GPM (MIN)	VOLT/PH	BTU/HOUR	AMP	FUEL	DIMENSIONS (LXWXH)	SHIP WT (LBS)
9450	1.103-905.0	3200	10	6	115/1	700,000	8	Oil-Fired	32.5"x25"x50.5"	525
9452	1.103-906.0	3200	10	6	115/1	540,000	1	Natural-Gas-Fired	32.5"x25"x50.5"	500
9460	1.103-907.0	3200	10	6	115/1	920,000	8	Oil-Fired	40.5"x32"x65"	920
9462	1.103-908.0	3200	10	6	115/1	920,000	1	Natural-Gas-Fired	40.5"x32"x65"	935

OPTIONS	
PART NO.	DESCRIPTION
9.801-040.0	10" Natural Gas-Fired Draft Diverter for Model 9452 ▶
8.717-730.0	12" Natural Gas-Fired Draft Diverter for Model 9462 ▶
8.749-806.0	10" Power Dampener ▶
8.753-171.0	12" Power Dampener ▶
8.749-807.0	Power Dampener Wiring Harness ▶
8.704-659.0	Hotsy Logo Label, 5" x 11" ▶
8.903-076.0	Natural-Gas to LP Conversion for Model 9452 ▶
8.903-075.0	Natural-Gas to LP Conversion for Model 9462 ▶

▶ Field Installed    ▶ Factory Installed

See PAGE 41 for other configured options thru the SPECIALS DEPARTMENT.



- 200 Gallon Water Tank
- Single Axle Rated to 3500 lbs.
- Optional Rock Guard with Wand Holder
- Dual Saddle Boxes
- Choose Your Pressure Washer Model

# HOTSY TR-3500 TRAILER SYSTEM

The TR-3500 is Hotsy's affordable trailer solution that provides mobile cleaning anywhere. Axle assembly with leaf-spring suspension is rated at 3,500 lbs. The 200 gallon water tank features a float valve and 7-inch access port. Axle with electric brakes and break-away kit is the standard configuration.



Select a trailer and add one of these pressure washer models:

- 1075BE
- 1080BE
- 1200 Series



Optional Hose Reel and Mouting Kit



Side Saddle Tool Box



MODEL	PART NO.	DIMENSIONS (LXWXH)	WEIGHT (LBS)	SHIPPING WEIGHT (LBS)				
HOTSY TR-3500	1.103-847.0	136"x66"x52"	543	1043 (does not include pressure washer)				
				(trailer only)				
GVWR	WATER TANK CAPACITY	GAWR	WHEELS	JACK	JACK CAPACITY	BALL COUPLER	SAFETY CHAINS	LIGHTING
3500 lbs	200 gal	Single 3500 lbs	15" White Spoke Wheels ST205/75D15 Tires	Swivel Wheel w/ Caster Foot	1000 lbs	2"	Dual 5/16"	Recessed Lights are DOT Approved

OPTIONS	
PART NO.	DESCRIPTION
8.931-496.0	Brakes, Hydraulic
8.917-554.0	100 ft High Pressure Hose Reel
8.917-555.0	100 ft Low Pressure Hose Reel
8.931-506.0	Rock Guard with Wand Holder
8.924-493.0	2-5/16" Ball Hitch Coupler (adjustable height)
8.924-368.0	3" Lunette Eye Coupler
8.904-051.0	Battery Installed on Pressure Washer
8.917-290.0	Assembly Mounting (for 1200 Series)*
8.917-291.0	Assembly Mounting (for 1075BE and 1080BE Models)*

► Field Installed    ▶ Factory Installed

\*Required when purchasing a pressure washer and trailer package.  
Not available for trailer-only purchase.



- Honda GX 390 or Vanguard 400 engine and electric start with manual start backup
- Adjustable thermostat for water temperature regulation
- 8 gallon diesel fuel tank
- Lift handle and swing away tongue for easier hook up of the trailer and storage
- EASY!Force gun with cruise control like technology - uses its own recoil force to hold the trigger down - so, no more sore hands after hours of use

# HDS 3.5/40 GE MT TULE SERIES

Ready to pick up and go at a moments notice, Kärcher's Tule Series HDS 3.5/40 Ge MT hot water pressure washer trailer provides the necessary cleaning power on virtually any job site which has a water source. Simply unhitch the Tule Series HDS 3.5/40 Ge MT and take the cleaning power where you need it most. The Tule Series trailer features a reliable Honda or Vanguard engine, 8 gallon diesel fuel tank, electric start with manual start backup and much more.  
U.S. Design Patent No. 9,724,734 B2



Shown with optional hose reel



TECHNICAL DATA

MODEL	PART NO.	GPM	PSI	DRIVE	ENGINE	START	PUMP	SHIP WEIGHT (LBS)	(L x W x H) Inches
HDS 3.5/40 Ge MT*	1.103-844.0	3.5	4000	Direct	Honda GX390	Electric	Kärcher KS	750	100 x 45 x 75
HDS 3.5/40 Ge VMT	1.110-118.0	3.5	4000	Direct	Vanguard 400	Electric	Kärcher KS	750	100 x 45 x 75

ACCESSORIES

PART NO.	DESCRIPTION
■ 8.756-481.0 ■	EASY!Force trigger gun (North American Model) - zero force required. Standard 1/4" connection for wand, 3/8" connection for hose.
■ 8.756-797.0	3-5 GPM Chemical Injector Kit
■ 8.754-990.0	12V Battery (required for hot water operation)
■ 8.711-293.0	Zinc plated variable pressure lance
■ 8.925-182.0	50', 3/8" hose, double-wire at 6000 PSI

OPTIONS

PART NO.	DESCRIPTION
<input type="checkbox"/> 8.924-367.0	2-5/16" Ball Coupler
<input type="checkbox"/> 8.924-667.0	Lifting Kit
<input type="checkbox"/> 8.924-370.0	LED Lights
<input type="checkbox"/> 8.924-700.0	2-inch Collar Lock Coupler
<input type="checkbox"/> 8.924-368.0	3" Lunette coupler

OPTIONS

PART NO.	DESCRIPTION
<input type="checkbox"/> 8.750-682.0	Hose Reel Fixed 100', 5000 PSI, 3250 F, equipped for 3/8" hose
<input type="checkbox"/> 8.925-255.0	Hose Reel Bracket (Mount Kit)

▶ Field Installed ▶ Factory Installed

■ Included  Optional ■ Please Note: NOT compatible with EASY!Lock



# WELCOME TO THE CLEANING REVOLUTION.

*Clean without limits. Go cordless with the new Kärcher  
CleanWave battery-powered pressure washer.*

**NEW INNOVATION  
FOR PRESSURE WASHERS**

# CLEANWAVE

**Unleash the power, without the cord.**

CleanWave rides the wave of innovation to propel us towards a cleaner, greener future with zero emissions. Kärcher, the global leader in cleaning equipment, introduces a battery-powered professional cold water pressure washer to usher in a new era of efficiency and flexibility. The innovative CleanWave provides a cordless solution to tackle heavy-duty cleaning with an unrivaled runtime of up to 4 hours.

The Deluxe model features auto start/stop, pump protection and ECO mode operation. CleanWave delivers robust cleaning performance without compromise.



**FEATURES**

- *ECO mode extends battery life up to 240 minutes*
- *Steel lifting bars and forklift compatible frame*
- *Charge time from flat to full in 8 hours*
- *Direct drive triplex crankshaft pump*
- *CleanWave Deluxe's lithium battery requires zero maintenance, providing 3,000 charge cycles. CleanWave Classic's AGM battery is non-gassing, non-spillable, and maintenance-free.*
- *EASY!Force gun with cruise control like technology - uses its own recoil force to hold the trigger down - so, no more sore hands after hours of use*

**EQUIPMENT/TECHNICAL DATA**

MODEL	PART NO.	GPM	PSI	BATTERY	VOLTS	MAX RUNTIME (MINS)	FULL CHARGE CYCLE (HRS)	DIMENSIONS (LXWXH)	PUMP	SHIP WT (LBS)
HD 3.5/40 Bp CleanWave Deluxe	1.106-612.0	3.5	4000	Lithium	72	90	10	58 x 40 x 38	Direct	770
....in ECO Mode		2.0	2000			240				
HD 2.0/20 Bp CleanWave Classic	1.106-613.0	2.0	2000	AGM	36	90	8	58 x 40 x 38	Direct	917

**REPLACEMENT PARTS**

	ORDER NO.	DESCRIPTION
■	4.118-005.0	EASY!Force trigger gun (German model) - zero force required.
■	4.112-006.0	33" spray lance
■	6.110-034.0	33' high-pressure hose
□	8.933-337.0	Clean Wave Hose Reel

■ Included □ Optional ■ Compatible with EASY!Lock \*Contact factory for final price



- Honda, Vanguard or new Kohler diesel engine
- Flat-free tires for easy handling
- Small & large roll cage design
- Hotsy Belt-drive Pump
- Totally enclosed belt guard
- VRT3 unloader

# BD SERIES & HHD DIESEL

## BELT DRIVE

The BD Series is the most rugged cold water pressure washer on the market with its all-steel frame and cage, Hotsy belt-drive, triplex pump and cleaning power of up to 5000 PSI. Four gas models make up what is Hotsy's most durable cold water line-up ever. All models are ETL safety certified and feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, lance, trigger gun, nozzles and chemical injector.



BD Series shown in large cage (4-wheel) version. Small cage 2-wheel version also available.



HHD 3.4/30D



MODEL	PART NO.	GPM	PSI	ENGINE MODEL	CCs	PUMP MODEL	FRAME	NO. WHEELS	DIMENSIONS (LXWXH)	SHIP WT (LBS)
BD-373539	1.107-021.0	3.7	3500	Honda GX390	389	HM4035R.3	Small Cage	2	42"x26"x30"	275
BD-404029	1.107-022.0	4.0	4000	Vanguard 16	479	HX5843R.2	Large Cage	4	46"x30"x36"	360
BD-405039E*	1.107-023.0	4.0	5000	Honda GX630	688	HX5450R	Large Cage	4	46"x30"x36"	417
BD-405039EK*	1.107-458.0	4.0	5000	LC2V80F-D	764	HX5450R	Large Cage	4	46"x30"x36"	417
BD-455039E*	1.107-024.0	4.5	5000	Honda GX690	688	HX5450R	Large Cage	4	46"x30"x36"	430
BD-455039EK*	1.107-459.0	4.5	5000	LC2V80F-D	764	HX5450R	Large Cage	4	46"x30"x36"	440
HHD 3.4/30 D	1.107-382.0	3.4	3000	Kohler KD440	442	HM3540R	Stainless Steel	4	50"x40"x50"	155

\*E = Electric Start (battery not included)

OPTIONS	
PART NO.	DESCRIPTION
8.904-109.0	E-Zee Hose Reel Kit*100' (Small Cage) ▶
8.904-110.0	E-Zee Hose Reel Kit*100' (Large Cage) ▶
8.904-113.0	5000 PSI Hose Reel Kit,* (Large Cage) ▶
8.904-115.0	5000 PSI Dual Hose Reel Kit,*† (large cage) ▶
8.929-069.0	Flat-Free Cart Kit (HHD Model) ▶
8.750-478.0	100' Capacity Hose Reel (HHD Model) ▶

\*Includes hose reel and mounting hardware

†Includes garden hose reel and high-pressure hose reel

▶ Field Installed    ▶ Factory Installed

See PAGE 42 for other configured options thru the SPECIALS DEPARTMENT.

- Honda & Vanguard engines
- Totally enclosed belt guard
- Flat-free tires for easy handling
- Hotsy Belt-drive Pump

# BX SERIES

## BELT DRIVE

The BX Series is similarly rugged to the BD Series, but more compact. Powered by Honda engines, the BX series delivers cleaning power up to 3500 PSI and an all-steel frame protected by a durable powder coat finish. All models are ETL safety certified and feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, lance, nozzles and trigger gun.



Shown with optional hose reel & mounting kit



MODEL	PART NO.	GPM	PSI	ENGINE MODEL	CCs	START	PUMP MODEL	FRAME	DIMENSIONS (LXWXH)	SHIP WT (LBS)
BX-373539	1.107-028.0	3.7	3500	Honda GX390	389	Recoil	HM4035R.3	Large Chassis	45"x26"x24"	240
BX-373539 CAL	1.107-433.0	3.7	3500	Vanguard 400	408	Recoil	HM4035R.3	Large Chassis	45"x26"x24"	240

OPTIONS	
PART NO.	DESCRIPTION
8.929-062.0	Detergent Injector (up to 3 GPM) ▶
8.756-797.0	Chemical Injector, Non-Adjustable 0.083 (2.1MM) ▶
8.723-636.0	Detergent nozzle ▶
8.904-103.0	EZ Hose Reel Kit 100' (incl. reel & mounting hardware) ▶

▶ Field Installed    ▶ Factory Installed



- Honda GX engines
- Steel frame
- 10"tubed pneumatic tires for easy handling
- Hotsy Direct-drive Pump

# DB SERIES

## DIRECT DRIVE

The DB Series is the most compact, affordable alternative in the cold water line featuring a direct-drive triplex pump. All models are powered by reliable Honda engines. Lightweight design and tubed pneumatic tires make for easy maneuvering. All models are ETL safety certified and feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, lance, trigger gun, nozzles and chemical injector.



Shown with optional hose reel & mounting kit



POWERED by HONDA

MODEL	PART NO.	GPM	PSI	ENGINE MODEL	CCs	PUMP MODEL	HOSE (FT)	DIMENSIONS (LXWXH)	SHIP WT (LBS)
DB-252739	1.107-032.0	2.5	2700	Honda GX200	196	HP2535G	50	35"x21"x24"	145
DB-303039	1.107-033.0	3.0	3000	Honda GX270	270	HP3035G1	50	35"x21"x24"	175
DB-354039	1.107-222.0	3.5	4000	Honda GX390	390	HS354093	50	35"x21"x24"	179
DB-383539	1.107-034.0	3.8	3500	Honda GX390	390	HS4040G3	50	35"x21"x24"	179

### OPTIONS

PART NO.	DESCRIPTION
8.904-105.0	EZ Hose Reel Kit 100' (includes reel & mounting hardware)

▶ Field Installed    ▶ Factory Installed

- Reliable Kärcher engine with an extended 4-year warranty
- Direct and Belt drive models
- Durable VRT3 unloader with bypass loop diverts water flow when trigger gun is not activated
- Aluminum frame - modular design - converts easily from cart to skid

# TETON SERIES

**DIRECT DRIVE**   **BELT DRIVE**

Corrosion-resistant and light-weight, Kärcher's direct drive, Teton Series aluminum pressure washers can be utilized as a cart or a skid for maximum cleaning versatility and durability. These reliable Kärcher powered pre washers offer a 4-year engine warranty for a limited time, bypass loop for additi pump protection, 7-year warranty and flat-free tires.



MODEL	PART NO.	GPM	PSI	DRIVE	CC	ENGINE	PUMP	SHIP WEIGHT (LBS)	SHIP DIMENSIONS (L X W X H) INCHES	LIST PRICE
HD 3.0/27 G Teton	1.107-398.0	3.0	2700	Direct	212	Kärcher	Crankcase	112	45 x 28 x 29	
HD 3.5/35 G Teton	1.107-440.0	3.5	3500	Direct	212	Kärcher	Crankcase	132	45 x 28 x 29	
HD 4.0/40 G Teton	1.107-399.0	4.0	4000	Direct	420	Kärcher	Crankcase	130	45 x 28 x 29	
HD 4.0/40 Ge Teton*	1.107-400.0	4.0	4000	Direct	420	Kärcher	Crankcase	158	45 x 28 x 29	
HD 3.0/27 GB Teton	1.107-441.0	3.0	2700	Belt	212	Kärcher	Crankcase	123	45 x 28 x 29	
HD 3.5/35 GB Teton	1.107-442.0	3.5	3500	Belt	302	Kärcher	Crankcase	158	45 x 28 x 29	
HD 4.0/40 GB Teton	1.107-443.0	4.0	4000	Belt	420	Kärcher	Crankcase	169	45 x 28 x 29	
HD 4.0/40 GeB Teton	1.107-444.0	4.0	4000	Belt	420	Kärcher	Crankcase	205	45 x 28 x 29	
HD 5.0/30 GB Teton	1.107-445.0	5.0	3000	Belt	420	Kärcher	Crankcase	169	45 x 28 x 29	

\*Electric start available on select models.

## ACCESSORIES

PART NO.	DESCRIPTION	LIST PRICE
■ 8.750-247.0	Trigger Gun, model M407	
■ 8.925-129.0	Hose, 50' x 3/8", 1w, 4,000 PSI SWXSO	
■ 8.783-039.0	Lance 30" Zinc plated, handle & coupler (for HD 3.0/27 G Classic)	
■ 8.783-040.0	Lance 44" Zinc plated, handle & coupler (for HD 4.0/40 G Classic and HD 4.0/40 Ge Classic)	
■ 9.802-216.0	Injector, Chem, NON ADJ, 0.083	
□ 8.929-511.0	Belt Drive Hose Reel Bracket Kit	
□ 8.929-509.0	Direct Drive Hose Reel Bracket Kit	
□ 8.712-429.0	Nozzle	
□ 8.925-229.0	Legacy, 100' x 3/8" ID, 6000 PSI, 2-wire, smooth cover, black high pressure hose	
□ 8.753-572.0	A+ Surface Cleaner SC21	
□ 8.753-573.0	A+ Surface Cleaner SC24	
□ 9.302-243.0	Legacy Turbo Nozzle, 4.0, 4350 PSI	
□ 8.710-620.0	Legacy Superlite stainless steel wand, 72" - 56.0 oz	
□ 9.807-754.0	Skid mount feet	
□ 9.807-750.0	37.5" long handle	
□ 9.807-753.0	Lance holder	
□ 9.807-752.0	Hose storage hook	
□ 9.807-751.0	Handle with hose reel (mild steel anthracite handle)	

■ Included   □ Optional



- Honda GX and Vanguard engines
- Modular design converts to skid
- VRT3 unloader with bypass loop
- Flat-free tires for easy handling
- Downstream chemical injection
- Aluminum Frame
- ETL certified to UL-1776 safety standards

# HD SERIES

**DIRECT DRIVE    BELT DRIVE**

The HD Series are Hotsy's modular cold water pressure washers with corrosion resistant aluminum frame. Wheels can be removed allowing for easy trailer mounting. Models are available in belt or direct drive and powered by Honda GX and Vanguard engines. All models are ETL safety certified and feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, lance, nozzles and trigger gun.



MODEL	PART NO.	GPM	PSI	ENGINE MODEL	CCs	START	PUMP MODEL	DRIVE	DIMENSIONS (LXWXH)	SHIP WT (LBS)
HD 3.0/27 G	9.807-711.0	3.0	2700	Honda GX200	196	Recoil	LP3035	Direct	41"x22"x24"	112
HD 3.5/35 G	9.807-712.0	3.5	3500	Honda GX270	270	Recoil	LP3535G.1	Direct	41"x22"x24"	130
HD 3.5/35 G	1.107-421.0	3.5	3500	Vanguard 300	305	Recoil	LP3535G.1	Direct	41"x22"x24"	130
HD 4.0/40 G	9.807-713.0	4.0	4000	Honda GX390	389	Recoil	LS4040G.3	Direct	43"x26"x27"	149
HD 4.0/40 G	1.107-429.0	4.0	4000	Vanguard 400	408	Recoil	LS4040G.3	Direct	43"x26"x27"	149
HD 4.0/40 Ge*	9.807-714.0	4.0	4000	Honda GX390	389	Electric	LS4040G.3	Direct	43"x26"x27"	158
HD 4.0/40 Ge*	1.107-435.0	4.0	4000	Vanguard 400	408	Electric	LS4040G.3	Direct	43"x26"x27"	158
HD 3.0/27 GB	9.807-715.0	3.0	2700	Honda GX200	196	Recoil	LP3035G	Belt	41"x22"x24"	123
HD 3.5/35 GB	9.807-716.0	3.5	3500	Honda GX270	270	Recoil	LM3540R.3	Belt	41"x22"x24"	156
HD 3.5/35 GB	1.107-422.0	3.5	3500	Vanguard 300	305	Recoil	LM3540R.3	Belt	41"x22"x24"	156
HD 4.0/40 GB	9.807-717.0	4.0	4000	Honda GX390	389	Recoil	LM3840R.3	Belt	43"x26"x27"	160
HD 4.0/40 GB	1.107-430.0	4.0	4000	Vanguard 400	408	Recoil	LM3840R.3	Belt	43"x26"x27"	160
HD 4.0/40 GeB*	9.807-718.0	4.0	4000	Honda GX390	389	Electric	LM3840R.3	Belt	43"x26"x27"	196
HD 4.0/40 GeB*	1.107-434.0	4.0	4000	Vanguard 400	408	Electric	LM3840R.3	Belt	43"x26"x27"	196
HD 5.0/30 GB	9.808-251.0	5.0	3000	Honda GX390	389	Recoil	LM4035.R3	Belt	43"x26"x27"	160
HD 5.0/30 GB	1.107-446.0	5.0	3000	Vanguard 400	408	Recoil	LM4035.R3	Belt	43"x26"x27"	160
HD 5.0/30 GeB*	9.808-387.0	5.0	3000	Honda GX390	389	Recoil	LM4035.R3	Belt	43"x26"x27"	160
HD 5.0/30 GeB-CAL*	9.808-390.0	5.0	3000	Vanguard 400	408	Recoil	LM4035.R3	Belt	43"x26"x27"	160

\*Battery included on electric start models.



**Hotsy cold water pressure washers are ideal for removing dirt. All Hotsy pressure washers are designed for continuous use in commercial and industrial applications.**



OPTIONS	
PART NO.	DESCRIPTION
9.807-750.0	37.5" Handle
9.807-751.0	Handle with Hose Reel (Mild Steel Anthracite Handle)
9.807-752.0	Hose Hook
9.807-753.0	Wand Holder

▶ Field Installed   
 ▶ Factory Installed

OPTIONS	
PART NO.	DESCRIPTION
8.929-509.0	Hose Reel Bracket Kit (Direct-Drive)
8.929-511.0	Hose Reel Bracket Kit (Belt-Drive)
9.807-754.0	Skid Mount Feet (Set of 4)
8.924-213.0	Hotsy Logo Label (Direct Drive, Small Label)
8.704-659.0	Hotsy Logo Label (Belt Drive, Large Label)

## SKID OPTIONS

*Dealer assembly required. Pressure washer sold separately.*

The perfect accompaniment to Hotsy HD Series pressure washers – these mild steel skids offer two configurations: skid with a 50 gallon water tank and 100' hose reel OR skid with two 100' hose reels. The HD Skids fit within a standard UTV / ATV bed when ordering the direct drive models as depicted below. *NOTE: Belt drive models extend beyond the frame and are not recommended. Skid feet included.*



DESCRIPTION	PART NO.	FRAME MATERIAL	WATER TANK	HOSE REEL	COMPATIBLE PRESSURE WASHER (SOLD SEPARATELY)	DIMENSIONS (LXWXH)	SHIP WT (LBS)
One 100' Hose Reel & 50 gallon Water Tank	9.807-835.0	Mild Steel	50 gallon	1	HD 3.0/27 G 9.807-711.0 HD 3.5/35 G 9.807-712.0 HD 4.0/40 G 9.807-713.0	40"x48"x35"	180 (excluding pressure washer)
Two 100' Hose Reels	9.807-840.0	Mild Steel	Not Included	2	HD 3.0/27 G 9.807-711.0 HD 3.5/35 G 9.807-712.0 HD 4.0/40 G 9.807-713.0	40"x48"x35"	172 (excluding pressure washer)



- Up to 10 GPM/ Up to 4000 PSI
- Belt Drive or Direct Drive Pump
- 4 Year Warranty on Engine

# MINI SKID SERIES

**DIRECT DRIVE** **BELT DRIVE**

These skid mount pressure washers include a high pressure pump with unloader and gas engine mounted on stainless steel base. 12 Volt-battery and fuel tank included as noted below. Pressure ranges to accommodate high-volume needs. **Note:** Trigger gun, wand and hose not included.



POWERED by **HONDA**

POWERED BY **VANGUARD**

POWERED BY **KÄRCHER**



MODEL	PART NO.	GPM	PSI	ENGINE
HD 3.5/30 G♦	9.808-396.0	3.5	3000	Honda GX270
HD 4.0/40 G CAL♦	1.107-475.0	4.0	4000	Vanguard 14hp
HD 5.0/30 G CAL♦	1.107-476.0	5.0	3000	Vanguard 14hp
HD 4.0/40 G CAL♦	1.107-477.0	4.0	4000	Vanguard 14hp
HD 5.0/30 GB CAL♦	1.107-478.0	5.0	3000	Vanguard 14hp
HD 8.0/35 GeB♦	1.107-413.0*	8.0	3500	
HD 8/35 GeBK♦	1.107-460.0	8.0	3500	Kärcher 25hp
HD 10/30 GeBK♦	1.107-449.0	10.0	3000	Kärcher 25hp

♦Battery not included ♦Fuel tank not included \* Not available in California, no UL or CARB certification

- Hotsy Belt-drive Pump
- Totally enclosed belt guard
- 12' cord length
- Flat-free tires for easy handling

# BDE SERIES

## BELT DRIVE

The BDE Series is the electric equivalent of the BD Series. Hotsy belt-drive, triplex pump and cleaning power of 5000 PSI. All models are ETL safety certified and feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, lance, trigger gun, nozzles and chemical injector.



MODEL	PART NO.	GPM	PSI	HP	MOTOR RPM	VOLT/PH	AMPS	PUMP MODEL	PUMP RPM	HOSE (FT)	DIMENSIONS (LXWXH)	SHIP WT (LBS)
BDE-505009B	1.107-085.0	5.0	5000	20	1765	230/3	48	HX5450R	1650	50	46"x30"x36"	524
BDE-505009C	1.107-086.0	5.0	5000	20	1765	460/3	26	HX5450R	1650	50	46"x30"x36"	524

OPTIONS	
PART NO.	DESCRIPTION
8.904-110.0	E-Zee Hose Reel Kit* 100' <span style="float: right;">▶</span>
8.904-113.0	5000 PSI Hose Reel Kit,* <span style="float: right;">▶</span>
8.904-115.0	5000 PSI Dual Hose Reel Kit,*† <span style="float: right;">▶</span>

\*Includes hose reel and mounting hardware  
 †Includes garden hose reel and high-pressure hose reel

▶ Field Installed    ▶ Factory Installed

**See PAGE 40 for other configured options thru the SPECIALS DEPARTMENT.**



- Electric motor, 2-10 HP
- Downstream detergent injector
- Hotsy Belt-drive Pump
- Insulated SS variable pressure wand
- Option-ready for Time Delay Shutdown or Auto Start/Stop

# 1700 SERIES

## BELT DRIVE

The 1700 Series offers the most reliable, stationary, electric-powered, cold water pressure washer. All models come with an all stainless-steel case and are ETL safety certified. Each feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, insulated variable pressure wand, trigger gun, nozzles and chemical injector.



1700 Series shown with optional hose reel kit (PN 8.903-039.0) and Tall Floor Stand (PN 9.801-034.0).



MODEL	PART NO.	GPM	PSI	HP	VOLT/PH	AMPS	PUMP MODEL	DIMENSIONS (LXWXH)	SHIP WT (LBS)
1710	1.106-593.0	2.8	1000	2	120/1	20	HB3030R	31"x21"x16"	200
1720	1.106-594.0	3.9	2000	6	230/1	28	HM4030R.3	31"x21"x16"	275
1722	1.106-595.0	3.9	2000	6	208/1	30	HM4030R.3	31"x21"x16"	250
1723	1.106-596.0	3.9	2000	6	208/3	16	HM4030R.3	31"x21"x16"	250
1724	1.106-597.0	3.9	2000	6	230/3	16.8	HM4030R.3	31"x21"x16"	250
1725	1.106-598.0	3.9	2000	6	460/3	8	HM4030R.3	31"x21"x16"	250
1743	1.106-599.0	4.8	3000	10	208/3	31.3	HM4035R.3	31"x21"x16"	302
1744	1.106-600.0	4.8	3000	10	230/3	26.8	HM4035R.3	31"x21"x16"	300
1745	1.106-601.0	4.8	3000	10	460/3	15	HM4035R.3	31"x21"x16"	315
1755	1.106-602.0	5.6	2500	10	460/3	13.5	HX9536R.2	31"x21"x16"	310

OPTIONS	
PART NO.	DESCRIPTION
9.801-031.0	Kit, 1700 Wheel w/Chemical Rack (black)
8.904-527.0	Kit, 1700 Wheel w/Chemical Rack (stainless steel)
9.801-033.0	Kit, 1700 Wall Mount
9.801-034.0	Kit, 1700 Floor Stand, Tall (20 3/4"W x 29"D x 36"H)
9.801-035.0	Kit, Caster Wheels for 1700 Floor Stand
8.903-039.0	Kit, Hose Reel w/Bracket for 1700 Stand & Wall Mount Kits
8.903-040.0	Kit, 1700 Floor Stand, Short (20 3/4"W x 29"D x 24"H)
8.903-043.0	Kit, 1700 Wall Mount, Stainless Steel
8.903-617.0	Kit, 1700 Floor Stand, Tall, Stainless Steel
8.903-521.0	Kit, Hose Reel for Wheel Kit, 100 ft. (excludes hose)

OPTIONS		
PART NO.	DESCRIPTION	LIST PRICE
8.903-041.0	Time Delay Shut Down 3ph (1723, 1724, 1725, 1743, 1744, 1745)	
8.903-044.0	Time Delay Shut Down 3ph (1755)	
8.903-045.0	Time Delay Shut Down 120v 1ph (1710)	
8.929-374.0	Time Delay Shutdown 208/230v 1ph (1720, 1722)	
8.903-047.0	Auto Start/Stop 3ph (1723, 1724, 1725, 1743, 1744, 1745)	
8.903-048.0	Auto Start/Stop 3ph (1755)	
8.929-376.0	Auto Start/Stop 120v 1ph (1710)	
8.929-377.0	Auto Start/Stop 208/230v 1ph (1720, 1722)	

▶ Field Installed    ▶ Factory Installed

\*Time Delay Shutdown and Auto Start/Stop cannot be combined on the same machine

See PAGE 40 for other configured options thru the SPECIALS DEPARTMENT.

- Aluminum frame
- Converts easily to skid style frame
- Flat-free tires for easy handling
- Hotsy Direct-drive Pump

# HD SERIES ELECTRIC CART

## DIRECT DRIVE

The HD Series electric carts are corrosion-resistant aluminum cold water pressure washers that easily convert from a cart to a skid for maximum cleaning versatility. Low profile handle and compact footprint. All models are ETL safety certified and feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, lance, trigger gun, nozzles and chemical injector.



MODEL	PART NO.	GPM	PSI	HP	VOLT/PH	MOTOR RPM	AMPS	PUMP MODEL	HOSE (FT)	DIMENSIONS (LXWXH)	SHIP WT (LBS)
HD 1.9/13 Ed	9.801-798.0	1.9	1300	2	120/1	1725	20	LFP2030S	50	35"x21"x24"	196
HD 2.0/10 Ed	9.801-797.0	2.0	1000	1.5	120/1	1725	15	LFP2030S	50	35"x21"x24"	212
HD 3.0/10 Ed	9.801-799.0	3.0	1000	2	120/1	1725	20	LF2830S	50	35"x21"x24"	219
HD 3.5/20 Ea	9.801-800.0	3.5	2000	5	230/1	3450	22	LF3530F	50	35"x21"x24"	220

### OPTIONS

PART NO.	DESCRIPTION
9.807-754.0	Skid Feet (Set of 4) ▶
9.807-750.0	37.5" Long Handle ▶
9.807-751.0	Handle with Hose Reel (Mild Steel Anthracite Handle) ▶
9.807-752.0	Hose Storage Hook ▶
9.807-753.0	Wand Holder ▶

▶ Field Installed    ▶ Factory Installed



- Hotsy Direct-drive Pump
- 25' & 50' hose
- Convenient carrying handle
- Remote switch with 10' cord (ET-201409DX2 only)
- Standard Auto Start/Stop (ET-201409DX2 only)

# ET SERIES HANDHELD

## DIRECT DRIVE

The ET Series is the handheld model of the electric-powered line, delivering cleaning capability up to 1400 PSI. All models are ETL safety certified and feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, lance, nozzles and trigger gun.



Note: Detergent injector sold separately



MODEL	PART NO.	GPM	PSI	HP	VOLT/PH	PUMP MODEL	HOSE (FT)	DIMENSIONS (LXWXH)	SHIP WT (LBS)
ET-301109D	1.106-107.0	3.0	1000	2.0	115/1	HF2830S	50	20"x19"x17"	121
ET-201409DX2	1.107-089.0	1.8	1400	2.0	115/1	HFP2030S	25	20"x19"x17"	123

### OPTIONS

PART NO.	DESCRIPTION
8.920-952.0	Wall Mount Bracket
8.929-062.0	Detergent Injector (up to 3 GPM)

▶ Field Installed    ▶ Factory Installed

- Heater add-on
- 3000 PSI
- Diesel, kerosene, #1 heating oil
- 3/8" QC inlet / outlet
- Efficient vertical combustion
- 5-gallon polyethylene fuel tank
- 36' ground fault interrupter plug
- Thermostat temperature control
- Compact size
- 10" easy-roll tubed pneumatic tires

# HOT BOX OIL-FIRED

Add hot water cleaning economically. Portable water heater add-on for existing cold water pressure washers. Quick connect to cold water washer, supply fuel and power to Hot Box for hot water cleaning applications — USE ONLY WHEN NEEDED and keep the convenience of the portable cold water washer.



MODEL	PART NO.	GPM	PSI	VOLT/PH	DIMENSIONS (LXWXH)
HOT BOX	1.103-910.0	Up to 5	Up to 3,000	120/1	27"x37"x39"

- Smart Relay Control provides control over run time, auto start/stop and shut down functionality
- Remote-ready
- Hotsy Belt-drive Pump

# CWC SERIES

## BELT DRIVE

The CWC Series is a completely self-contained, stationary, electric-powered, cold water washer with programmable smart control, upstream detergent injector and ETL safety certification. Remote ready for wash bays. All models are ETL safety certified and feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, lance, nozzles and trigger gun.



MODEL	PART NO.	GPM	PSI	HP	MOTOR RPM	VOLT/PH	AMP	PUMP MODEL	HOSE (FT)	SHIP WT (LBS)
CWC-53	1.106-572.0	4.0	3000	7.5	1725	230/1	36	HM4030R.3	50	340
CWC-54	1.106-573.0	4.0	3000	7.5	1725	230/3	23	HM4030R.3	50	340
CWC-55	1.106-574.0	4.0	3000	7.5	1725	460/3	11	HM4030R.3	50	340
CWC-56	1.106-575.0	4.0	3000	7.5	1770	575/3	9	HM4030R.3	50	340
CWC-63	1.106-576.0	5.0	2000	7.5	1725	230/1	36	HM4035R.3	50	340
CWC-64	1.106-577.0	5.0	2000	7.5	1725	230/3	18	HM4035R.3	50	340
CWC-65	1.106-578.0	5.0	2000	7.5	1725	460/3	9	HM4035R.3	50	340
CWC-66	1.106-579.0	5.0	2000	7.5	1770	575/3	8	HM4035R.3	50	340

OPTIONS	
PART NO.	DESCRIPTION
8.916-989.0	Remote Station (image 1 below) ▶
8.924-814.0	R-Con Wireless Remote Kit (1 remotes/1 receiver) (image 2 below) ▶
8.925-072.0	R-Con Wireless Remote Kit (2 remotes/1 receiver) ▶

OPTIONS	
PART NO.	DESCRIPTION
8.924-878.0	Wall Mount Remote Bracket for R-Con (image 3 below) ▶
8.756-329.0*	Replacement Remote (transmitter only) ▶
8.916-988.0	Soap Solenoid and Switch ▶

▶ Field Installed    ▶ Factory Installed

\* Please Note: R-Con Wireless Remote comes from vendor, is custom made to order and is not universal. When ordering, please contact customer service to supply the serial number off the transmitter you have along with the channel number, so we can pass along that information to the vendor.



See PAGE 42 for stainless steel and other configured options thru the SPECIALS DEPARTMENT.



- 3 stage vacuum motor delivers 100 CFM 100" sealed lift vacuum
- Simple curbside controls for easy use
- Rated for water up to 120°F and compatible with surface cleaners and hot water machines
- Bolt-on mounting system configured on the base to mount to a trailer for portability from site to site or optional caster wheel kit
- Small footprint allows the unit to be mounted where limited space is available
- Drain port and filter basket work together to keep sludge from clogging

# RC SERIES WATER RECOVERY

Stop wash water from flowing down a drain or away from your area by collecting the wastewater from pressure washing. As EPA laws become more prevalent and strive to conserve water quality, contract cleaners and construction sites will need to recover their wash water and runoff. Eliminate the problem with the RC Series that is capable of recovering and transferring up to 30 GPM of water and transferring to a holding tank. Its small footprint allows the RC Series to be mounted on a trailer. Be fully in control of water flow with the optional water dikes and drain covers to stop water from flowing down a drain or away from your site. Comes standard with a 50' vacuum hose and scupper head.



Reliable 120V Transfer Pump capable of transferring 30 GPM of water to the holding tank



Shown with optional caster wheel kit



MODEL	PART NO.	ELECTRICAL	AMPS	RECOVERY	TANK (GAL)	VACUUM MOTOR	DIMENSIONS (LXWXH)	SHIP WT (LBS)
RC-30E	1.103-514.0	120V	15	30 GPM	27	3 Stage 100 CFM 100" sealed lift	24"x27"x59"	127

OPTIONS	
PART NO.	DESCRIPTION
8.751-299.0	Mosmatic Surface Cleaner with Vac Port
8.928-887.0	Caster Wheel Kit
8.925-858.0	Discharge Hose Kit
8.618-451.0	Vacuum Hose
8.928-850.0	Scupper Head

DRAIN COVERS & WATER DIKES	
PART NO.	DESCRIPTION
8.751-135.0	Drain Cover, 36" x 36", 30oz PVC
8.751-136.0	Drain Cover, 48" x 48", 30oz PVC
8.751-137.0	Drain Cover, 48" x 48", Urethane
8.751-138.0	Water Dike, 10', 22oz PVC
8.751-139.0	Water Dike, 10', 40oz Urethane
8.751-140.0	Water Dike, 20', 22oz PVC
8.751-141.0	Water Dike, 20', 40oz Urethane

▸ Field Installed   ▸ Factory Installed





## 2024 STANDARD SPECIALS PRICE LIST

The following pages include equipment that can be ordered through our Specials Department. Instructions for ordering are outlined below.

### Specials Order - No Quote Required

If you are ordering a standard special as listed in this price list, you may place the order with Special's Customer Service Representative, without the need for a Specials Quote. Lead times for orders coming from the Specials Department typically run double the "standard" lead time. Lead times do vary, so please check with your Specials CSR.

ALL QUOTED LEAD TIMES ARE WORKING DAYS (does not include weekends and holidays). These models allow you to add specially configured options to standard Hotsy models. Pricing for these units is determined by taking the regular equipment cost and adding the cost of the special option(s).

### Specials Order - Quote Required

Machine modifications that do not appear in this price list may be requested by submitting a "Specials Request" using the "Specials Request Form" located on the Hotsy Infonet website. Your request will be responded to within 24 hours. In cases where the quote requires information outside of our control, please allow 24 hours for us to respond with an updated response time.

1. Go to Infonet at <https://kaercher-infonet.com/us>.
2. From the menu on the top of the home page, select "Sales"
3. From the menu select "Special Request Form".
4. Fill out the form completely and give as many details as possible.
5. Click on the "Submit Request" button at the bottom of this page.
6. We will respond to your quote request within 24 hours with a quote. In cases where the quote requires information outside of our control we will respond with an updated response time within 24 hours.

**Important Notice:** *Unless specifically noted as so, products produced by the Specials Department will not maintain standard certifications. Please contact your RSM or Customer Service if you have any questions.*



# LP/NG SERIES ELECTRIC HOT WATER

**BASE MODEL 558 CAN BE MODIFIED**

**SPECIAL OPTIONS & CONFIGURATIONS**

MODEL	PART NO.	DESCRIPTION
558-559	H-101*	Electronic Ignition
558-559	H-102*	Auto Start / Stop
559	559-SP1	2 HP, 1300 PSI Natural Gas

**BASE MODELS 771 & 772 CAN BE MODIFIED**

**SPECIAL OPTIONS & CONFIGURATIONS**

MODEL	PART NO.	DESCRIPTION
771-772	H-106*	Electronic Ignition
771-772	H-107*	Auto Start / Stop

\*Options not sold separately



# 1800 SERIES ELECTRIC HOT WATER

**ALL 1800 SERIES BASE MODELS CAN BE MODIFIED**

**SPECIAL OPTIONS & CONFIGURATIONS**

MODEL	PART NO.	DESCRIPTION
All Models	H-708	2 Stage Gas Valve <sup>1</sup>

<sup>1</sup> Contact Specials Dept. for details. Expect extended lead times. Up to 750,000 BTUs. For higher rating, contact our Specials Dept. The two stage gas valve includes two thermostat controller and a gas valve with a high and low gas flow ability.



# 5700/5800 SERIES ELECTRIC HOT WATER

ALL 5700/5800 SERIES BASE MODELS CAN BE MODIFIED

SPECIAL OPTIONS & CONFIGURATIONS

MODEL	PART NO.	DESCRIPTION
All Models	H-705	2 Stage Gas Valve*

\*Contact Specials Dept. for details. Expect extended lead times.  
Up to 750,000 BTUs. For higher rating, contact our Specials Dept. The two stage gas valve includes two thermostat controller and a gas valve with a high and low gas flow ability.



Shown with modulating gas valve



# HWE SERIES ELECTRIC HOT WATER

**BELT DRIVE**

SPECIAL OPTIONS & CONFIGURATIONS

MODEL	PART NO.	DESCRIPTION
HWE-50F †	HWE-50-SP	575V/3PH Heater only
All Models	H-600	Float Tank
All Models	H-610	Non-brushed Stainless Steel Heater*
	8.941-506.0	460V / 3PH Heating Module Only (unbranded)

\*Exterior cabinet only  
† Indicates ETL certified



Shown with special option stainless steel cabinet



MODELS TO BE MODIFIED

MODEL	PART NO.	GPM	PSI	HP	MOTOR	AMPS	VOLT/PH	KvA HOUR	BTU/HR	PUMP MODEL	DIMENSIONS (LXWXH)	SHIP WT (LBS)
HWE-402009C	1.109-646.0	4.0	2000	6.2	Baldor	55	460/3	40.5	138,308	HM4030R.3	34"x25"x52"	620
HWE-403009C	1.109-647.0	3.5	3000	7.5	Baldor	59	460/3	40.5	138,308	HM4030R.3	34"x25"x52"	640
HWE-402009F	1.109-958.0	3.5	2000	5	Baldor	46	575/3	40.5	138,308	HM4030R.3	34"x25"x52"	620
HWE-403009F	1.109-959.0	3.5	3000	7.5	Baldor	49	575/3	40.5	138,308	HM4030R.3	34"x25"x52"	640



# GAS ENGINE SERIES GAS ENGINE HOT WATER



1075BE (shown with optional caster wheel kit)



**BELT DRIVE**

BASE MODELS 965B, 1075BE & 1080BE CAN BE MODIFIED

SPECIAL OPTIONS & CONFIGURATIONS

MODEL	PART NO.	DESCRIPTION
1075BE *	H-402*	Steam**
1080BE	H-403*	Steam**

\*Options not sold separately

\*\*Steam includes a metering valve that, when opened, reduces GPM & PSI, allowing water temp to rise to wet steam  
12V battery required (not included)

\* - Standard part number not available in California. California dealers must request modifications be made to part number 1.110-082.0.

# 1200 SERIES GAS ENGINE HOT WATER



1290SS



ALL 1200 SERIES BASE MODELS CAN BE MODIFIED

SPECIAL OPTIONS & CONFIGURATIONS

MODEL	PART NO.	DESCRIPTION
All Models	H-300*	Steam**
All Models	H-630	Super Duty Kit ***
1290SS Only		4.5 GPM @ 5000 PSI

12V battery required (not included)

\*Options not sold separately

\*\*Steam includes a metering valve that, when opened, reduces GPM & PSI, allowing water temp to rise to wet steam

\*\*\*Super Duty Kit Description: Remove float tank. Replace flow switch with HD pressure switch. Replace unloader with VB80. Remove inlet detergent injector. Replace existing coil wrap with stainless steel coil wrap. Coil wound as a gas coil to reduce soot build up.

# HCD SERIES

## DIESEL HOT WATER SKID UNIT

### SPECIAL OPTIONS & CONFIGURATIONS

MODEL	PART NO.	DESCRIPTION
HCD5-5000	HCD5-5000-SP	5.0 @ 5000 Kubota D-1105-E3B Diesel, 12V Burner
HCD6-3500	HCD6-3500-SP	5.6 @ 3500 Kubota D-1105-E3B Diesel, 12V Burner
HCS-503029E-SP*	HCS5-3500-SP	4.8 @ 3000 18 HP Vanguard Gas, 12V Burner
ALL	H-550	2400 watt Generator / 120V Burner**
ALL	H-551	Stainless Steel Frame
SS Option Only	H-552	Stainless Steel Lifting Cage w/option H-551 only
SS Option Only	H-553	Stainless Steel Lifting Cage & Drip Pan w/option H-551 only

\*HCS comes with plastic fuel tanks and SS top and bottom wrap. Note: Stainless steel options H-551, H-552, H-553 do not apply to this model (call for stainless steel prices).

\*\*Doesn't exceed manufacturer's specifications of 2000 watts  
12V battery required (not included)



HCD



Shown with stainless steel cage option H-551, H-553





# 1700 SERIES ELECTRIC COLD WATER



ALL 1700 SERIES BASE MODELS CAN BE MODIFIED

SPECIAL OPTIONS & CONFIGURATIONS

MODEL	PART NO.	DESCRIPTION	LIST PRICE
All	H-800	Float Tank	
1740	1740-SP	10 HP 230V/1PH / 4.76 GPM @ 3000 PSI*	
1742	1742-SP	10 HP 208V/1PH / 4.76 GPM @ 3000 PSI*	

\*Does not come with GFCL, no certifications

# BDE SERIES ELECTRIC COLD WATER



ALL BDE SERIES BASE MODELS CAN BE MODIFIED

SPECIAL OPTIONS & CONFIGURATIONS

MODEL	PART NO.	DESCRIPTION
BDE5-3000	BDE5-3000-SP230-1	10 HP 230V/1PH
BDE5-3000	BDE5-3000-SP575-3	10 HP 575V/3PH
BDE5-5000	BDE5-5000-SP208-3	20 HP 208V/3PH
BDE5-5000	BDE5-5000-SP575-3	20 HP 575V/3PH
BDE8-3000	BDE8-3000-SP230-3	20 HP 230V/3PH
BDE8-3000	BDE8-3000-SP460-3	20 HP 460V/3PH
BDE10-2000	BDE10-2000-SP230-3	20 HP 230V/3PH
BDE10-2000	BDE10-2000-SP460-3	20 HP 460V/3PH
BDE8-3000	BDE8-3000-SP575-3	20 HP 575V/3PH
BDE10-2000	BDE10-2000-SP575-3	20 HP 575V/3PH
BDE	H-1000*	Time Delay Shutdown
BDE	H-2001*	Auto Start/Stop

\*Options not sold separately

# CWC SERIES ELECTRIC COLD WATER

ALL CWC SERIES BASE MODELS CAN BE MODIFIED

SPECIAL OPTIONS & CONFIGURATIONS

MODEL	PART NO.	DESCRIPTION
All Models *	H-CWCSS	Stainless Steel

\* ETL certified



# BELT DRIVE STATIONARY ELECTRIC COLD WATER

SPECIAL OPTIONS & CONFIGURATIONS

MODEL	PART NO.	DESCRIPTION
CWS6-3000	CWS6-3000-SP	15 HP 230V/460V/3PH*
CWS8-3000	CWS8-3000-SP	20 HP 230V/460V/3PH*
CWS10-2000	CWS10-2000-SP	15 HP 230V/460V/3PH*
	H-4000	Auto Start/Stop w/Shutdown
	H-4002	Time Delay Shutdown

\*Please verify voltage on order



Dimensions: 50"Lx28"Wx48"H



# BD SERIES GAS ENGINE COLD WATER



**SPECIAL OPTIONS & CONFIGURATIONS**

MODEL	PART NO.	DESCRIPTION
BD6-3500	BD6-3500-SP	20 HP Honda Electric Start (Lg Cage)
BD8-3000	BD8-3000-SP	24 HP Honda Electric Start (Lg Cage)
BD10-2000	BD10-2000-SP	24 HP Honda Electric Start (Lg Cage)

# 9400 SERIES HEATING MODULE



Model 9462

**ALL 9400 SERIES BASE MODELS CAN BE MODIFIED**

**SPECIAL OPTIONS & CONFIGURATIONS**

MODEL	PART NO.	DESCRIPTION
All Models	H-706	2 Stage Gas Valve*

*\*Up to 750,000 BTUs - for higher rating, contact our Specials Dept. The two stage gas valve includes two thermostat controllers and a gas valve with a high and low gas flow ability. Contact Specials Dept. for details. Expect extended lead times.*



# 1200/1800/ 5700 SERIES HEATER SERIES

## Available fuel burner types:

- Diesel
- Home Heating Oil
- Kerosene
- Natural Gas

## SPECIAL OPTIONS & CONFIGURATIONS

MODEL	PART NO.	DESCRIPTION
1200	H-1200	Oil-Fired 120 VAC - 398,000 BTUs
1200	H-1202	Oil-Fired 12 VDC - 398,000 BTUs
1200	H-1201	NG-Fired - 365,000 BTUs
1800	H-1800	Oil-Fired - 580,000 BTUs
1800	H-1801	NG-Fired - 560,000 BTUs
1800	H-708	2 Stage Gas Valve (used with H1801 only)**
5700	H-5700	Oil-Fired - 920,000 BTUs
5700	H-5701	NG-Fired - 920,000 BTUs
5700	H-705	2 Stage Gas Valve (used with H5701 only)**

MODEL/DESCRIPTION	SHIP WT (LBS)	DIMENSIONS (LXWXH)
1200 Series up to 5.6 GPM @ up to 4,000 PSI 1200 Oil-fired 120V AC / 1PH 5 Amp* 1202 Oil-fired 12V DC* 1201 NG Millivolt	285	19.5"x19.5"x52"
1800 Series up to 6 GPM @ up to 3,200 PSI 1800 Oil-fired 120V AC / 1PH 8 Amp 1801 NG 120V / 1PH 1 Amp (with electronic ignition)	375	31"x31"x53.25"
5700 Series up to 9.5 GPM @ up to 3,200 PS 5700 Oil-fired 120V AC / 1PH 8 Amp 5701 NG 120V / 1PH 1 Amp	610	31"x31"x63.5"
LP Conversion All NG Units H-101 Electronic Ignition 1201		



1200 Series Coil-Only Assembly



5700 Series Coil-Only Assembly

\*Verify voltage on order  
Contact Specials Dept. for details. Expect extended lead times.

Effective January 1, 2024. Prices, specifications and product descriptions subject to change without notice.