

DOUBLE ACTION SAFETY VALVES / VALVOLE DI SICUREZZA A DOPPIO EFFETTO VALVES FOR THE VACUUM / VALVOLE PER IL VUOTO

R40 SAFETY VALVES WITH DOUBLE ACTION MADE OF BRASS, BRONZE AND S.S. 316, WITH FREE DISCHARGE IN THE AIR, FROM 1 1/2" UP TO 2" AND SET PRESSURE FROM 0,4 UP TO 6 BAR. THEY CAN BE USED IN ALL PRODUCTION FIELDS. THESE SAFETY VALVES CAN SATISFY, AT THE SAME TIME, TWO REQUIREMENTS FOR TANKS AND VESSELS, DURING LOADING AND UNLOADING OPERATIONS:


- TO AVOID DANGEROUS OVERPRESSURES
- TO AVOID IMPLOSIONS DUE TO INTERNAL DEPRESSIONS.

THESE VALVES ARE PARTICULARLY SUITABLE FOR TANKS ON TRUCKS USED FOR TRANSPORT OF CEMENT, POWDERS, FLOURS AND CEREALS. THE SET PRESSURE IS ON CUSTOMER REQUEST, BUT THE SET DEPRESSION IS FIXED AT 0,05 BAR TO 0,6 BAR.


VALVE DIMENSIONS ARE LIMITED, SO THEY CAN BE USED IN ALL SITUATIONS AND IN ALL PLANTS.

V30 / V45 / V60 STAINLESS STEEL VACUUM VALVES FROM 2 "TO 3" ", SPECIAL CONNECTIONS (DIN, CLAMP ...).

R40 TYPE

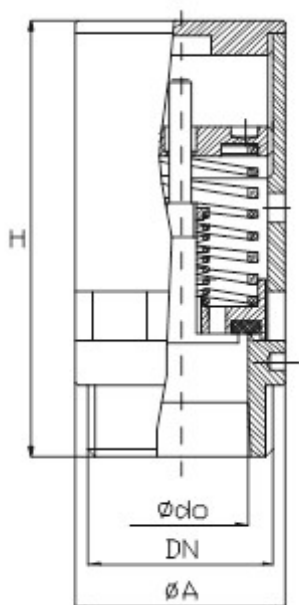

V30 / V45 / V60 TYPE

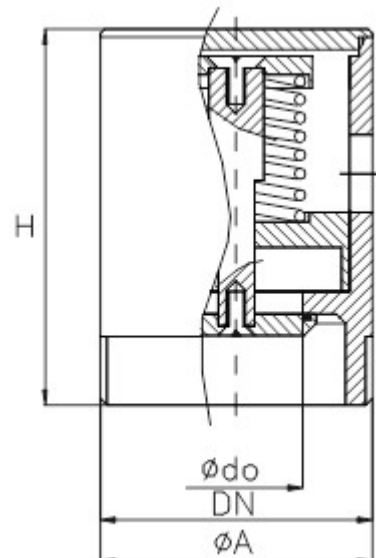

MATERIALS / MATERIALE

EN 12164 CW 614N BRASS / OTTONE EN 12164 CW 614N
EN 1982 Cu Sn5 Zn5 Pb5 BRONZE / BRONZO EN 1982 Cu Sn5 Zn5 Pb5
316 L STAINLESS STEEL / ACCIAIO INOX 316 L

SEAT GASKET / TENUTA

NBR / NBR FDA / EPDM / NEOPRENE / VITON
SILICONE / PTFE / METAL TO METAL

Type /Tipo	d0 Ø mm.	DN	A mm.	H mm.	Weight Peso Kg.	K	Lift / Alzata mm.	PN	Set pressure adjustment range / Campo di taratura bar
R40N	38	1 1/2 2"	Ø60 Hex. ch60	125	1,190	0,71	16	6	0,4 ÷ 6,0
V30	29	2" CLAMP DN DIN	60	86	-	-	-	-	0,05 ÷ 0,6 DEPRESSION
V45	46	3"	90	119	-	-	-	-	0,05 ÷ 0,6 DEPRESSION
V60	60	4" DN80 DIN	115	115 140	-	-	-	-	0,05 ÷ 0,6 DEPRESSION