



SAFETY VALVES FOR HIGH PRESSURE / VALVOLE PER ALTA PRESSIONE


TYPE “H / HP N”

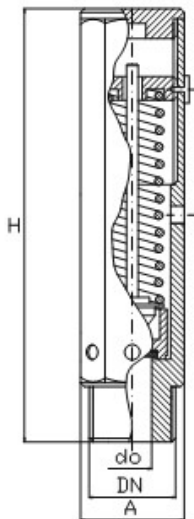

TYPE “H / HP C”

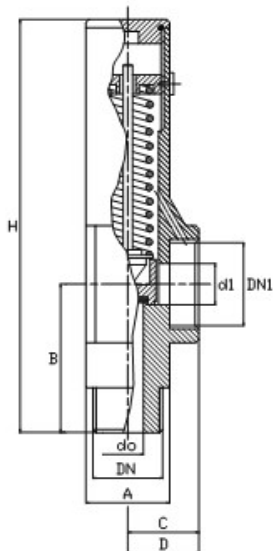

TYPE “HHP C”

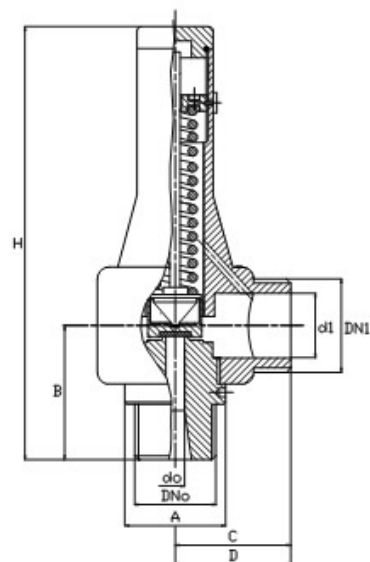

EN 12164 CW 614N BRASS / OTTONE EN 12164 CW 614N

MATERIALS / MATERIALE

EN 1982 Cu Sn5 Zn5 Pb5 BRONZE / BRONZO EN 1982 Cu Sn5 Zn5 Pb5

316 L STAINLESS STEEL / ACCIAIO INOX 316 L

SEAT GASKET / TENUTA

NBR / NBR FDA / EPDM / NEOPRENE / VITON

SILICONE / PTFE / METAL TO METAL

Type / Tipo	d0 Ø mm.	DN "G.	d1 Ø mm	DN1 "G.	A mm.	B Ø mm.		C mm.		D Ø mm.		H mm.		WEIGHT Kg.	
						BRONZE	SS316L	BRONZE	SS316L	BRONZE	SS316L	BRONZE	SS316L	BRONZE	SS316L
H2N	2.5	1/4	-	-	22	-	-	-	-	-	-	84	102	0,220	0,240
H2C		3/8 1/2	10	1/2 F		35	35	19	16	23	23	100	102	0,330	0,330
H5N	5	1/4	-	-	22	-	-	-	-	-	-	84	102	0,220	0,240
H5C		3/8 1/2	10	1/2 F		35	35	19	16	23	23	100	102	0,330	0,330
HP5N	4/5	1/4	-	-	28	-	-	-	-	-	-	118	120	0,430	0,430
HP5C		3/8 1/2 3/4	14	1/2 F		35	35	25	25	30	30	128	130	0,580	0,580
HP10C	10	1/2 3/4	14	1/2 F	28	35	35	25	25	30	30	128	130	0,580	0,580
HHP7N	7	3/4 1	-	-	40	-	-	-	-	-	-	155	161	1,200	1,150
HHP7C	7	3/4 1	26	1"1/4 M 3/4 F		51	54	46	54	53	60	192	195	2,350	2,300
HHP10N	10	3/4 1	-	-	40	-	-	-	-	-	-	155	161	1,200	1,150
HHP10C	10	3/4 1	26	1"1/4 M 3/4 F		51	54	46	54	53	60	192	195	2,350	2,300

Type / Tipo	K	LIFT mm.	PN	Set pressure adjustment range / Campo di taratura bar
H2/H5N – H2/H5C	0,05/0,5	4,5	From 100 To 400	10 ÷ 400
HP4/5N – HP4/5C		6,5		10 ÷ 400
HP10C	0,76	6,5		0,5 ÷ 100
HHP7N – HHP7C	0,95 - 0,96	8		10 ÷ 400
HHP10N – HHP10C	0,95 - 0,96	8		10 ÷ 200