



## SAFETY VALVES WITH FREE DISCHARGE / VALVOLE A SCARICO LIBERO

### TYPE / TIPO S10 / S15 / H10


TYPE "N"

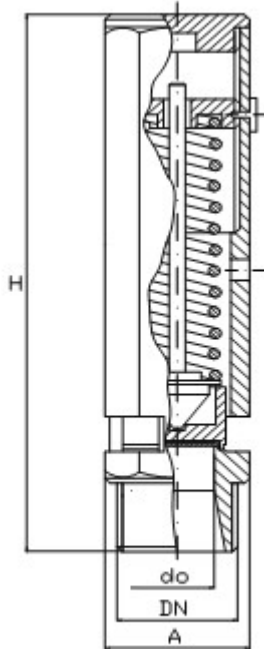

TYPE "P"

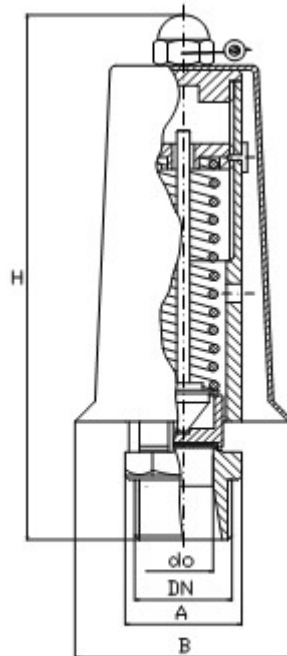

TYPE "A"

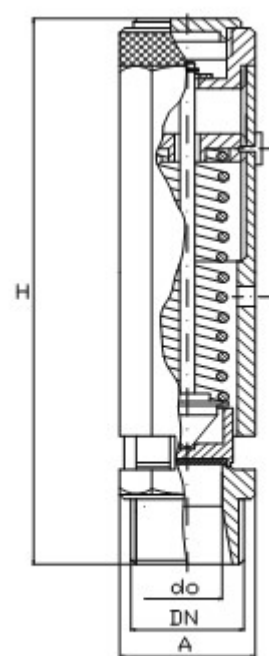

#### MATERIALS / MATERIALE

EN 12164 CW 614N BRASS / OTTONE EN 12164 CW 614N  
EN 1982 Cu Sn5 Zn5 Pb5 BRONZE / BRONZO EN 1982 Cu Sn5 Zn5 Pb5  
316 L STAINLESS STEEL / ACCIAIO INOX 316 L


#### SEAT GASKET / TENUTA

NBR / NBR FDA / EPDM / NEOPRENE / VITON  
SILICONE / PTFE


| Type / Tipo | d0 Ø mm. | DN "G.    | A mm.                       | B Ø mm. | H mm. | Weight<br>Peso Kg. | K    | Lift / Alzata<br>mm. | PN  | Set pressure adjustment<br>range / Campo di taratura<br>bar |
|-------------|----------|-----------|-----------------------------|---------|-------|--------------------|------|----------------------|-----|-------------------------------------------------------------|
| S10N        | 10       | 3/8 - 1/2 | Hex / ES.<br>ch.22          | -       | 84    | 0,185              | 0,84 | 4,5                  | 40  | 0,4 ÷ 30                                                    |
| S10P        |          |           |                             | 44      | 101   | 0,235              |      |                      |     |                                                             |
| S10A        |          |           |                             | -       | 90    | 0,200              |      |                      |     |                                                             |
| S15N        | 14,2     | 1/2 - 3/4 | Hex /<br>ES.ch.28<br>/ Ø 28 | -       | 118   | 0,410              | 0,84 | 6,5                  | 40  | 0,4 ÷ 30                                                    |
| S15P        |          |           |                             | 53      | 136   | 0,475              |      |                      |     |                                                             |
| S15A        |          |           |                             | -       | 124   | 0,420              |      |                      |     |                                                             |
| H10N        | 10       | 1/2 - 3/4 | Hex /<br>ES.ch.28<br>/ Ø 28 | -       | 118   | 0,430              | 0,96 | 6,5                  | 100 | 2,0 ÷ 100                                                   |
| H10P        |          |           |                             | 53      | 136   | 0,495              |      |                      |     |                                                             |
| H10A        |          |           |                             | -       | 124   | 0,440              |      |                      |     |                                                             |

## SAFETY VALVES WITH FREE DISCHARGE / VALVOLE A SCARICO LIBERO TYPE / TIPO S20 / H15


**TYPE “N”**

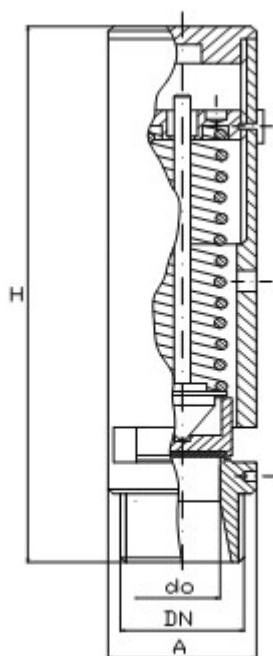

**TYPE “P”**

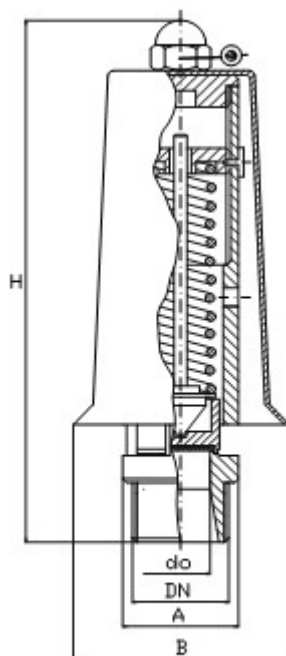

**TYPE “A”**

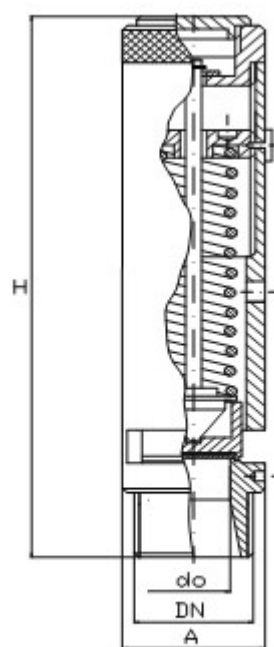

### MATERIALS / MATERIALE

**EN 12164 CW 614N BRASS / OTTONE EN 12164 CW 614N**  
**EN 1982 Cu Sn5 Zn5 Pb5 BRONZE / BRONZO EN 1982 Cu Sn5 Zn5 Pb5**  
**316 L STAINLESS STEEL / ACCIAIO INOX 316 L**


### SEAT GASKET / TENUTA

**NBR / NBR FDA / EPDM / NEOPRENE / VITON**  
**SILICONE / PTFE**


| Type / Tipo | d0 Ø mm. | DN "G. | A mm.                       | B Ø mm. | H mm. | Weight<br>Peso Kg. | K    | Lift / Alzata<br>mm. | PN  | Set pressure adjustment<br>range / Campo di taratura<br>bar |
|-------------|----------|--------|-----------------------------|---------|-------|--------------------|------|----------------------|-----|-------------------------------------------------------------|
| S20N        | 19,2     | 1      | Hex /<br>ES.ch.36<br>/ Ø 40 | -       | 155   | 0,990              | 0,84 | 8                    | 40  | 0,4 ÷ 30                                                    |
| S20P        |          |        |                             | 70      | 172   | 1,070              |      |                      |     |                                                             |
| S20A        |          |        |                             | -       | 166   | 1,060              |      |                      |     |                                                             |
| H15N        | 14,2     | ¾ - 1  | Hex /<br>ES.ch.36<br>/ Ø 40 | -       | 155   | 1,040              | 0,96 | 8                    | 100 | 2,0 ÷ 100                                                   |
| H15P        |          |        |                             | 70      | 172   | 1,120              |      |                      |     |                                                             |
| H15A        |          |        |                             | -       | 166   | 1,110              |      |                      |     |                                                             |

## SAFETY VALVES WITH FREE DISCHARGE / VALVOLE A SCARICO LIBERO TYPE / TIPO S25 / S32 / S40


TYPE "N"

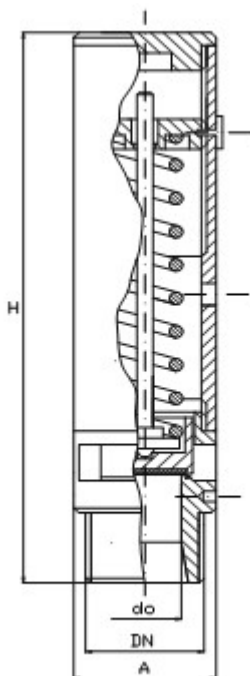

TYPE "P"

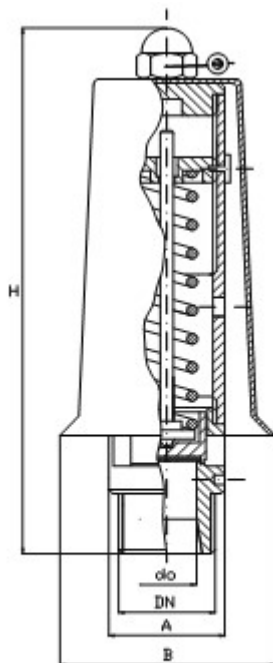

TYPE "A"

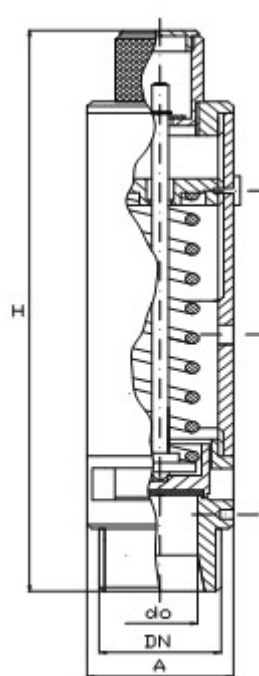

### MATERIALS / MATERIALE

EN 12164 CW 614N BRASS / OTTONE EN 12164 CW 614N  
EN 1982 Cu Sn5 Zn5 Pb5 BRONZE / BRONZO EN 1982 Cu Sn5 Zn5 Pb5  
316 L STAINLESS STEEL / ACCIAIO INOX 316 L

### SEAT GASKET / TENUTA / JOINT

NBR / NBR FDA / EPDM / NEOPRENE / VITON  
SILICONE / PTFE

| Type / Tipo | d0 Ø mm. | DN "G. | A mm. | B Ø mm. | H mm. | Weight<br>Peso Kg. | K    | Lift / Alzata<br>mm. | PN | Set pressure adjustment<br>range / Campo di taratura<br>bar |
|-------------|----------|--------|-------|---------|-------|--------------------|------|----------------------|----|-------------------------------------------------------------|
| S25N        | 24,2     | 1      | Ø48   | -       | 177   | 1,310              | 0,84 | 10                   | 40 | 0,4 ÷ 30                                                    |
| S25P        |          | 1 1/4  |       | 85      | 204   | 1,510              |      |                      |    |                                                             |
| S25A        |          | 1 1/2  |       | -       | 209   | 1,500              |      |                      |    |                                                             |
| S32N        | 31,2     | 1 1/4  | Ø60   | -       | 213   | 2,320              | 0,84 | 12                   | 40 | 0,4 ÷ 30                                                    |
| S32P        |          | 1 1/2  |       | 105     | 240   | 2,570              |      |                      |    |                                                             |
| S32A        |          | 2      |       | -       | 245   | 2,500              |      |                      |    |                                                             |
| S40N        | 38       | 1 1/2  | Ø73   | -       | 248   | 3,920              | 0,84 | 14                   | 40 | 0,4 ÷ 30                                                    |
| S40P        |          |        |       | 125     | 275   | 4,240              |      |                      |    |                                                             |
| S40A        |          |        |       | -       | 280   | 4,100              |      |                      |    |                                                             |