



SAFETY VALVES WITH FREE DISCHARGE / VALVOLE A SCARICO LIBERO

TYPE / TIPO R20 / R30 / R40


TYPE "N"

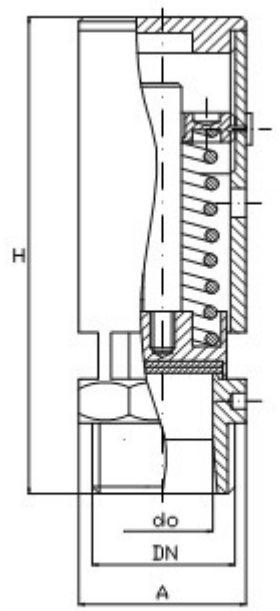

TYPE "P"

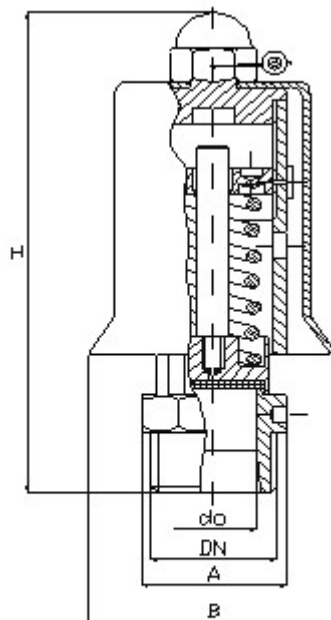

TYPE "A"

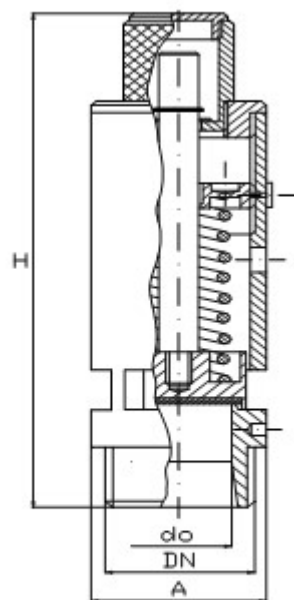

MATERIALS / MATERIALE

EN 12164 CW 614N BRASS / OTTONE EN 12164 CW 614N
EN 1982 Cu Sn5 Zn5 Pb5 BRONZE / BRONZO EN 1982 Cu Sn5 Zn5 Pb5
316 L STAINLESS STEEL / ACCIAIO INOX 316 L

SEAT GASKET / TENUTA

NBR / NBR FDA / EPDM / NEOPRENE / VITON
SILICONE / PTFE

Type / Tipo	d0 Ø mm.	DN "G.	A mm.	B Ø mm.	H mm.	Weight Peso Kg.	K	Lift / Alzata mm.	PN	Set pressure adjustment range / Campo di taratura bar
R20N	20	1	Ø35 / 36 Hex. Ch36	-	96	0,420	0,83	9	6	0,4 ÷ 6,0
R20P				60	113	0,480				
R20A				-	108	0,490				
R30N	30	1 1/4 1 1/2	Ø50 Hex. Ch50	-	110	0,840	0,77	13	6	0,4 ÷ 6,0
R30P				75	136	0,990				
R30A				-	142	1,100				
R40N	38	1 1/2 2	Ø60 Hex. ch60	-	125	1,190	0,71	16	6	0,4 ÷ 6,0
R40P				87	152	1,360				
R40A				-	157	1,450				