



SAFETY VALVES WITH PNEUMATIC ACTUATOR / VALVOLE CON COMANDO PNEUMATICO TYPE / TIPO S25 / S32 / S40

TYPE "CA"

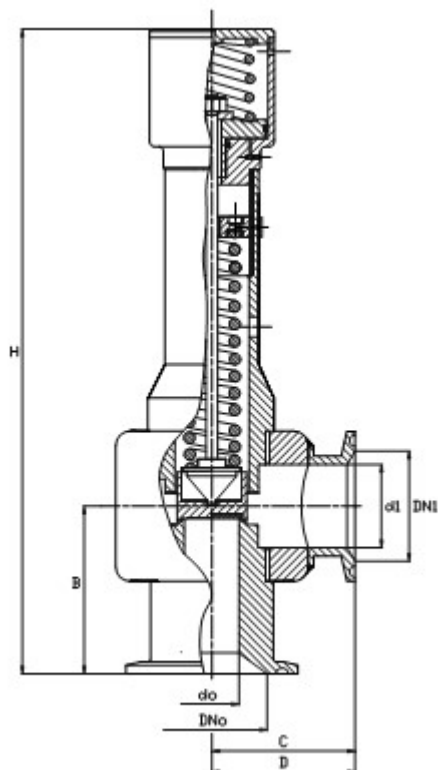

TYPE "CA"

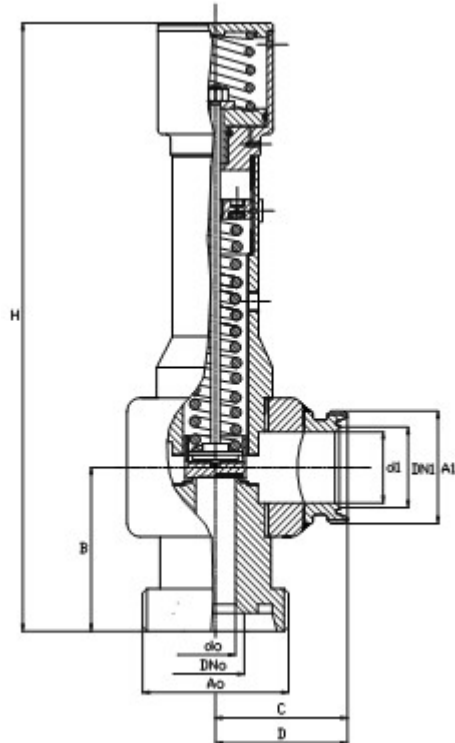

MATERIALS / MATERIALE

316 L STAINLESS STEEL / ACCIAIO INOX 316 L


SEAT GASKET / TENUTA

NBR / NBR FDA / EPDM / NEOPRENE / VITON
SILICONE / PTFE / METAL TO METAL


Type / Tipo	do Ø mm.	d1 Ø mm.	B mm.	C mm.	D Ø mm.	H mm.	WEIGHT Kg.	LIFT mm	SET PRESSURE ADJUSTMENT RANGE bar
S20CA	19.2	26	54	54	60	256	2,800	8	0.4 – 10
S25CA	24.2	32	62	66	72	279	4,200	10	0.4 – 10
S32CA	31.2	38	69	69	79	324	6,500	12	0.4 – 10
S40CA	38	48	77	77	89	362	8,800	14	0.4 – 10

SPECIAL CONNECTIONS / CONNESSIONI SPECIALI


DIN TYPE

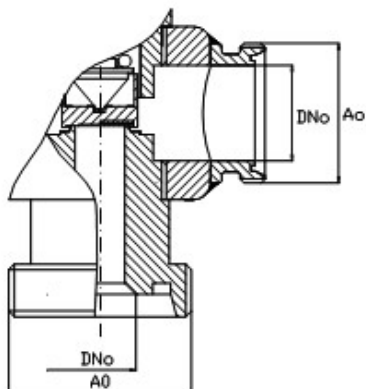

CLAMP TYPE

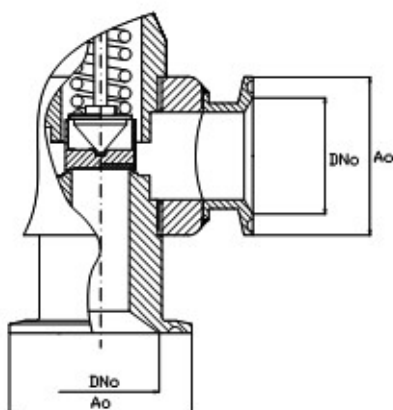

SMS TYPE

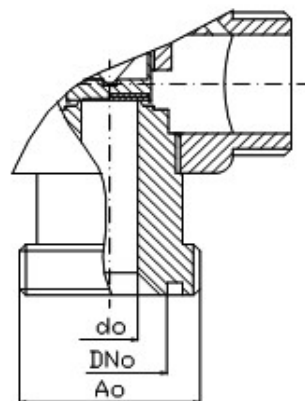

MATERIALS / MATERIALE

316 L STAINLESS STEEL / ACCIAIO INOX 316 L

SEAT GASKET / TENUTA

NBR / NBR FDA / EPDM / NEOPRENE / VITON SILICONE / PTFE / METAL TO METAL

DIN TYPE		CLAMP TYPE		SMS TYPE	
DN 15 DIN	Rd 34X1/8"	1" T.C.	50,5	SMS S25	Rd 40X1/6"
DN 20 DIN	Rd 44X1/6"	1 1/2" T.C.	50,5	SMS S38	Rd 60X1/6"
DN 25 DIN	Rd 52X1/6"	2" T.C.	64	SMS S51	Rd 70X1/6"
DN 32 DIN	Rd 58X1/6"	2 1/2" T.C.	77,4		
DN 40 DIN	Rd 65X1/6"				
DN 50 DIN	Rd 78X1/6"				