

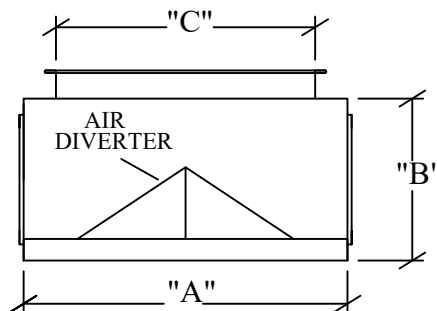


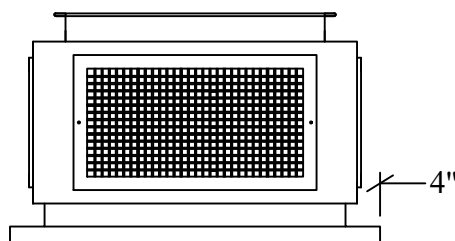

4 - WAY THROW DOUBLE DEFLECTION DROP BOX

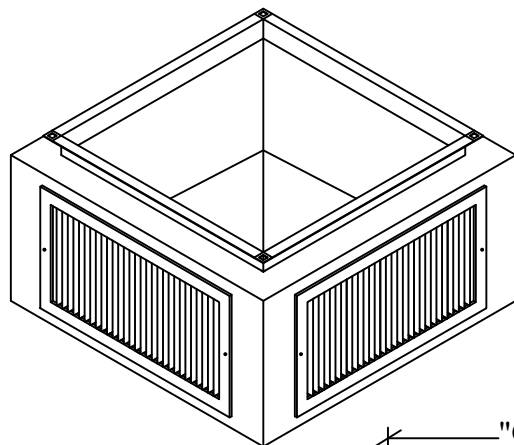

STANDARD ITEMS:

- 1: 2" THICK R-8 INTERNAL INSULATION
- 2: 3/8" RIVET NUTS IN CORNERS
- 3: GALVANIZED STEEL CONSTRUCTION
- 4: ALUMINUM GRILLES (WHITE)
- 5: TDC/F FLANGED DUCT CONNECTION (ADDS 2.5")
- 6: PYRAMID AIR DIVERTER

OPTIONS:

- ☐ 1: OPPOSED BLADE DAMPERS
- ☐ 2: CLOSED CELL INSULATION
- ☐ 3: DELETE INSULATION
- ☐ 4: MILL FINISH GRILLES
- ☐ 5: SINGLE DEFLECTION GRILLES
- ☐ 6: ALUMINUM CONSTRUCTION
- ☐ 7: STAINLESS STEEL CONSTRUCTION
- ☐ 8: PAINT DROP BOX WHITE
- ☐ 9: DRAIN PAN
- ☐ 10: HEATER FOR DRAIN PAN

DATA BASED ON ZERO DEGREES DEFLECTION

THROW BASED ON 150-100-50 FPM NECK VELOCITY

QTY	MODEL#	"A"	"B"	"C"	GRILLE SIZE	CFM RANGE	NC	THROW MIN#	THROW MAX#	WEIGHT
	R4WAY-1	26.0"	9.5"	20.0"	18 X 5	1,000 - 2,500	15 - 41	14-21-32	27-33-46	30 LBS
	R4WAY-2	30.0"	10.5"	24.0"	22 X 6	1,550 - 3,500	16 - 42	17-25-36	32-40-56	36 LBS
	R4WAY-3	34.0"	11.5"	28.0"	26 X 7	2,650 - 5,300	23 - 44	24-33-47	39-47-67	50 LBS
	R4WAY-4	38.0"	12.5"	32.0"	30 X 8	3,600 - 7,000	24 - 45	28-39-55	46-55-78	60 LBS
	R4WAY-4.5	38.0"	14.5"	32.0"	30 X 10	4,400 - 8,800	24 - 45	28-39-55	46-55-78	64 LBS
	R4WAY-5	38.0"	16.5"	32.0"	30 X 12	5,000 - 10,000	23 - 44	32-46-65	53-66-92	68 LBS
	R4WAY-6	44.0"	16.5"	38.0"	36 X 12	6,000 - 11,000	24 - 42	34-55-72	56-68-96	78 LBS
	R4WAY-7	44.0"	20.5"	38.0"	36 X 16	8,250 - 15,000	25 - 43	41-59-84	65-80-113	84 LBS

REVISED 02-12-2025

EP Custom Products, Inc.- 7823 Commerce Drive, Denver, North Carolina, 28037 704.483.8745

COPYRIGHT 2025