

**Illusion**  
Gas Log Fires



1000



2000



3000



3500



4000



6000

**luminar**  
Inbuilt Series

**PROUDLY**  
AUSTRALIAN MADE

# Luminar

## Inbuilt Installation


### Specifications

The dimensions, capacities, ratings etc quoted here are correct at the time of writing but may be subject to change. Please check with your dealer before commencing any building works or installations of these appliances.

GAS TYPES, RATINGS & APPROXIMATE HEATING CAPACITIES						
MODEL	GAS TYPE	MJH	HEATING CAPACITY SQ/M	GAS TYPE	MJH	HEATING CAPACITY SQ/M
LC-1000i	NATURAL	20	20-35	LPG	16	20-35
LC-2000i	NATURAL	26	40-60	LPG	25	40-60
LC-3000i	NATURAL	32	60-85	LPG	30	60-95
LC-3500i	NATURAL	36	85-105	LPG	33	60-95
LC-4000i	NATURAL	40	125-150	LPG	39	120-140
LC-6000i	NATURAL	53	150-185	LPG	42	130-160

DISCLAIMER: MANY FACTORS WILL INFLUENCE THE HEATING CAPACITY OF AN APPLIANCE, INCLUDING WHETHER OR NOT A HOME IS INSULATED, WHETHER THERE ARE LARGE GLASS AREAS, HIGH CEILINGS AND THE TYPES OF FLOOR COVERINGS.

External dimensions for all Luminar Inbuilt Gas Log Fires (All dimensions in millimeters)						
MODEL	Width(A)	Height (B)	Height of Rear Casing (C)	Depth Of Rear Casing (D)	Width Of Rear Casing (E)	Depth to Flue Centre from Fascia Front - Vertical Flue model (F)
LC-1000i	856 (Fascia)	528 (Fascia)	490	410	685	320
LC-2000i	957 (Fascia)	575 (Fascia)	535	410	785	320
LC-3000i	1056 (Fascia)	615 (Fascia)	575	410	885	320
LC-3500i	1205 (Fascia)	615 (Fascia)	575	436	1035	320
LC-4000i	1420 (Fascia)	615 (Fascia)	575	410	1250	320
LC-6000i	1720 (Fascia)	615 (Fascia)	575	436	1550	323

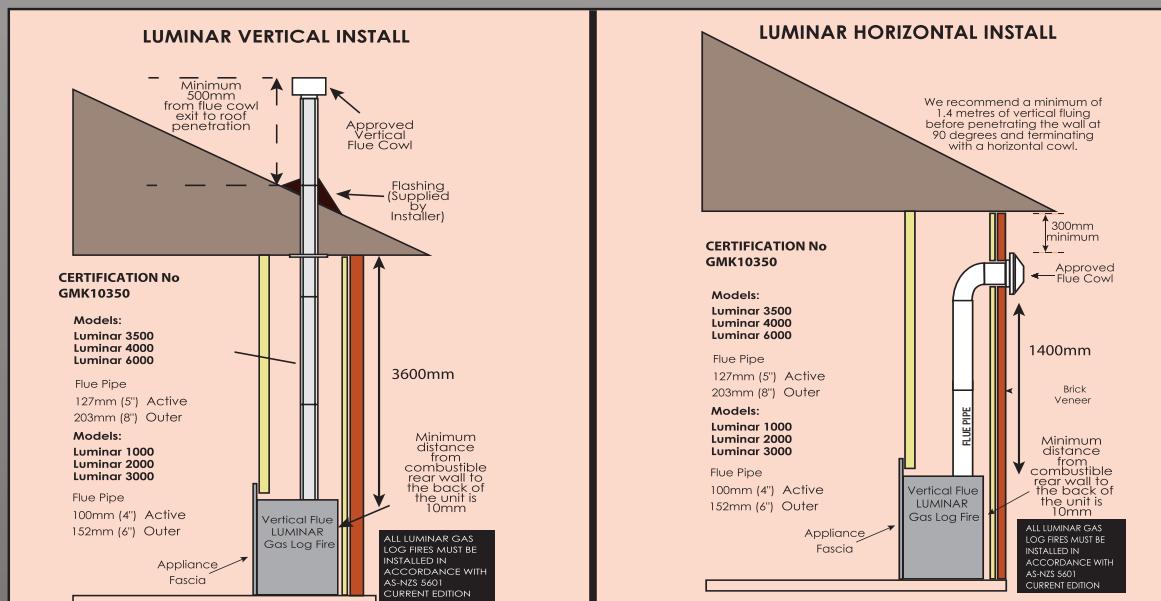

#### VERTICAL INSTALLATION

This unit comes with an approved balanced flue system 3.6 metres long.

Note - unit must be installed with a minimum flue length of 2.7 metres.

**REFER TO ATTACHED DIAGRAM.**

*Illusion Luminar gas log fires must only be installed by an authorised gasfitter.*

#### HORIZONTAL INSTALLATION

This unit comes with an approved balanced flue system.

Note - unit must be installed with a minimum flue length of 1.4 metres of vertical flue before horizontal exit.

**REFER TO ATTACHED DIAGRAM.**

*Illusion Luminar gas log fires must only be installed by an authorised gasfitter.*



## Luminar 1000

The Luminar 1000 features economy, performance and style and it's compact dimensions makes it the perfect choice to keep smaller areas warm and comfortable in your home without breaking the budget.



## Luminar 2000

Capable of heating up to 60 sq metres, the stunning Illusion Luminar 2000 Inbuilt Gas Log Fires are available in a range of colours including Metallic Black with several trim options designed to suit any decor.



## Luminar 3000

The Luminar 3000 has a sleek design and rustic charm that is sure to enhance any home. It's clean burning flames will mesmerise and ensure that you're warm all year round.



## Luminar 3500

If modern, and ambient was the look you were going for, you will be impressed with the Luminar 3500. This elegant appliance will be sure to warm your home in style.



## Luminar 4000

The Luminar 4000 features luxury, performance and wide viewing window making it the perfect choice to keep larger living areas warm.




## Luminar 6000

This fascia design has a drop down control panel cover and convenient switch allowing you to turn it on or off quickly. An optional remote control allows you to adjust the Fire to suit your own taste from a cosy lounge chair.


# Luminar

## Standard Installation

FRAME CUT OUT

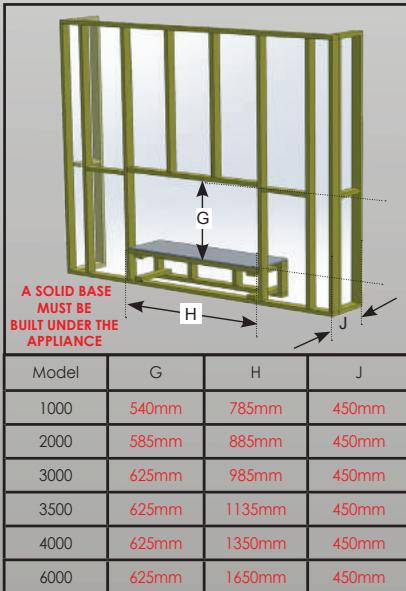

PLASTER CUT OUT

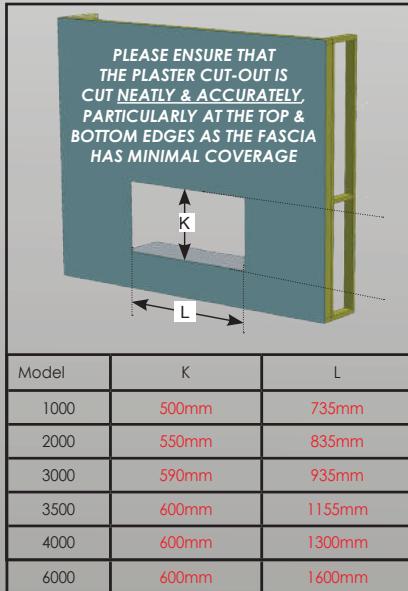

**PLEASE READ THE FOLLOWING INSTALLATION INSTRUCTIONS THOROUGHLY BEFORE ATTEMPTING TO INSTALL THE APPLIANCE**

**IMPORTANT:** If an inbuilt unit is installed at floor level, or up to 250mm from the underside of the appliance door, a hearth must be used for a distance of 400mm in front of the appliance. The appliance must be installed 250mm or more from the floor if no hearth is used.

**IF YOU ARE PLANNING TO MOUNT A TELEVISION ABOVE THE APPLIANCE, PLEASE REFER TO YOUR OWNERS MANUAL**

ILLusion Australia Pty. Ltd. accepts no responsibility for damage caused to electrical appliances installed above the gas log fire.

**INSTALLER INFORMATION**  
**READ THIS BEFORE CUTTING**  
**ANY HOLES IN PLASTER OR OTHER WALLS**

### **IMPORTANT!**

The plaster cut out must be straight and accurate, especially at the bottom. There is no overlap of the fascia at the bottom so the bottom plaster edge must be cut carefully. It is recommended that a plaster trim strip be fitted

