

## Company Overview

**AEM, a global manufacturer of electronic components, was founded to redefine the standards of quality and value in the industry with continuous innovation.**



AEM's products are used globally for circuit protection and EMI signal filtering by many fortune 500 companies and other renowned customers in the telecommunication, computer, consumer electronics, and automotive industries. AEM's patented breakthrough technologies and lean manufacturing facilities ensure superior quality at the best value. AEM's products and services include the followings:

- **Commercial Circuit Protective Components**
  - SolidMatrix<sup>®</sup> Multilayer Monolithic Chip Fuses
  - AirMatrix<sup>®</sup> Surface Mount Fuses
  - GcDiode<sup>®</sup> ESD Suppressors
  - Multilayer Varistors
- **Inductive Components**
  - Multilayer Ferrite Chip Beads/Power Beads
  - Multilayer Ferrite/Ceramic Inductors
  - Thin Film Inductors
  - Wire Wound Inductors

### AEM SolidMatrix<sup>®</sup> Chip Fuses

AEM offers the broadest line of surface mount chip fuses in the industry. AEM SolidMatrix<sup>®</sup> Surface Mount Chip Fuses are recognized by Underwriters Laboratories (UL). Constructed as a multilayer monolithic structure using a co-firing process, these fuses offer superior mechanical integrity and are ideal for applications in LCD monitors, PC cards, disk drives, portable communication products, PDAs, digital cameras, DVDs, TVs, cell phones, rechargeable battery packs, battery chargers, etc.

### AEM AirMatrix<sup>®</sup> Surface Mount Fuses

With multiple internal safety approvals, high consistency and excellent inrush current withstanding capability, AEM's AirMatrix<sup>®</sup> wire-in-air surface mount fuses are ideal for applications with high voltage and high inrush current, such as converters, inverters, lightings, LED drivers, LCD monitors, notebooks, PC servers, communication technology devices, office automation electronics, industrial equipment, home electrical applications, etc.

### AEM GcDiode<sup>®</sup> ESD Suppressors

With an ultra low capacitance of 0.25pF, AEM's GcDiode<sup>®</sup> ESD suppressors are ideally suited for ESD protection of high speed data lines operating at data rates of 1 GHz or higher. Constructed with a glass ceramic monolithic structure and incorporating advanced Ag/Pd composite ESD materials, the new ESD suppressors feature a low clamping voltage and instant response time, offering the highest level of ESD protection for sensitive circuits. Power losses are minimized as these components exhibit leakage current rates that are typically less than 0.1nA in normal operation.

### AEM Multilayer Varistors

AEM's Surface Mount Multilayer Varistors (MLV) are manufactured with zinc oxide based semi-conductive ceramics using multilayer co-firing technology. These varistors are designed to protect electronics systems from surge and transient over-voltages by limiting surge voltage and absorbing energy. The MLV products have a wide range of applications, such as cell phones, digital cameras, PDA, MP3, notebooks, telecommunications, automotive systems, data systems, power supplies, etc.

## Company Overview

AEM, a global manufacturer of electronic components, was founded to redefine the standards of quality and value in the industry with continuous innovation.



### AEM Quality Assurance

AEM Suzhou facility is ISO 9001:2008 and ISO 14001 certified. Long known for its high quality products and exceptional customer service, AEM also provides a 7x24 technical support hotline.

AEM is committed to constantly striving for excellence and perfection in providing products and customer services with the highest quality and value.

### We Go the Extra Mile to Give You the Best Price

## CONTENTS

<b>SolidMatrix<sup>®</sup> Surface Mount Fuses</b>	<b>4</b>
FA Series	4
1206 Size	4
0603 Size	7
0402 Size	10
SB Series	13
1206 Size	13
0603 Size	16
HI Series	19
1206 Size	19
0603 Size	22
HA/HB Series	25
1206 Size HA Series	25
1206 Size HB Series	28
FF Series	31
0603 Size	31
Product Identification	34
Reliability Tests	34
Fuse Selection and Temperature De-rating Guideline	34
Soldering Temperature Profiles	35
<b>TF-FUSE<sup>®</sup> Thin Film Surface Mount Fuses</b>	<b>36</b>
FF Series 0603 Size	36
HI Series 0603 Size	40
Environmental Tests	44
<b>AirMatrix<sup>®</sup> Surface Mount Fuses</b>	<b>46</b>
AF Series	46
2410 Size	46

1206 Size	50
MF Series	54
2410 Size	54
1210 Size	58
Environmental Tests	61
Soldering Temperature Profiles	62
<b>Surface Mount ESD Suppressors</b>	64
GcDiode <sup>®</sup> ESD Suppressors	64
PeDiode <sup>®</sup> ESD Suppressors	67
Surface Mount ESD Suppressor Array	70
ESD Protection Diode	73
Ultra Low Capacitance ESD Protection Diode	77
<b>Surface Mount Polymer PTCs</b>	80
0603 Size	80
0805 Size	82
1206 Size	85
1210 Size	89
1812 Size	93
2018 Size	97
2920 Size	99
Environmental Tests	103
Recommended Reflow Soldering Profile	103
<b>Surface Mount Multilayer Varistors</b>	104
ESD Protection (ES) Series	104
Normal Surge Protection (NA) Series	105
High Surge Protection (HA) Series	107
High Voltage (HV) Series	108
ESD Array Series	110
Product Identification	111

Operating Temperatures	111
Terms and Definitions	111
Shape and Dimensions	112
Recommended Land Patterns	113
Soldering Temperature Profiles	115
<b>High Surge Protection Devices</b>	116
Super High Voltage (SV) Series	116
Super High Current (SC) Series	117
Super High Network (SN) Series	119
Product Identification	121
Environmental Test	121
<b>Storage</b>	123

# SolidMatrix® Surface Mount Fuses

## FA Series (Fast Acting), 1206 Size



### Features:

- Multilayer monolithic structure with glass ceramic body and silver fusing element
- Silver termination with nickel and pure-tin solder plating, providing excellent solderability
- Compatible with both wave and reflow soldering processes
- Operating temperature range: -55°C to +125°C (with de-rating)

### Clearing Time Characteristics:

% of current rating	Clearing time at 25°C
100%	4 hours min.
250%	5 seconds max.
400%	0.05 seconds max.

### Shape and Dimensions:


Unit	Inch	mm
<b>L</b>	0.126 ± 0.008	3.20 ± 0.20
<b>W</b>	0.063 ± 0.008	1.60 ± 0.20
<b>T</b>	0.033 ± 0.008	0.85 ± 0.20
<b>B</b>	0.020 ± 0.010	0.51 ± 0.25

### Agency Approval:

Recognized Under the Components Program of UL.  
File Number: E232989.

### Patents:

Patent numbers "US6,034,589", "US6,228,230", "US6,602,766", "US7,268,661 B2", "ZL00134544.3", "ZL02114719.1", "ZL200410104280.7", "ZL201020551360.8", "ZL201010299185.2", "ZL201220030614.0", "ZL201210020693.1".

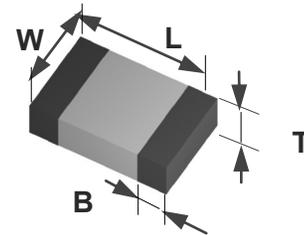

### Ordering Information:

Part Number	Current Rating (A)	Voltage Rating (VDC)	Interrupting Ratings	Nominal Cold DCR ( $\Omega$ ) <sup>1</sup>	Nominal $I^2t$ ( $A^2s$ ) <sup>2</sup>	Marking (Optional) <sup>3</sup>
F1206FA0500V063T	0.5	63	50 A at rated voltages	0.730	0.002	C
F1206FA0750V063T	0.75	63		0.513	0.005	D
F1206FA1000V063T	1.0	63		0.220	0.011	E
F1206FA1500V063T	1.5	63		0.120	0.024	G
F1206FA1750V063T	1.75	63		0.100	0.045	H
F1206FA2000V063T	2.0	63		0.050	0.075	I
F1206FA2500V032T	2.5	32		0.035	0.11	J
F1206FA3000V032T	3.0	32	45 A at rated voltages	0.031	0.21	K
F1206FA4000V032T	4.0	32		0.022	0.35	M
F1206FA5000V032T	5.0	32		0.015	0.60	N
F1206FA6000V032T	6.0	32		0.013	1.0	+
F1206FA7000V032T	7.0	32		0.011	1.6	-
F1206FA8000V032T	8.0	32		0.008	2.3	=

1. Measured at  $\leq 10\%$  rated current and 25°C ambient.


2. Melting  $I^2t$  at 0.001 second pre-arcing time.

3. Black Marking Character Code.

# SolidMatrix® Surface Mount Fuses

## FA Series (Fast Acting), 1206 Size


### Average Pre-arcing Time Curves:

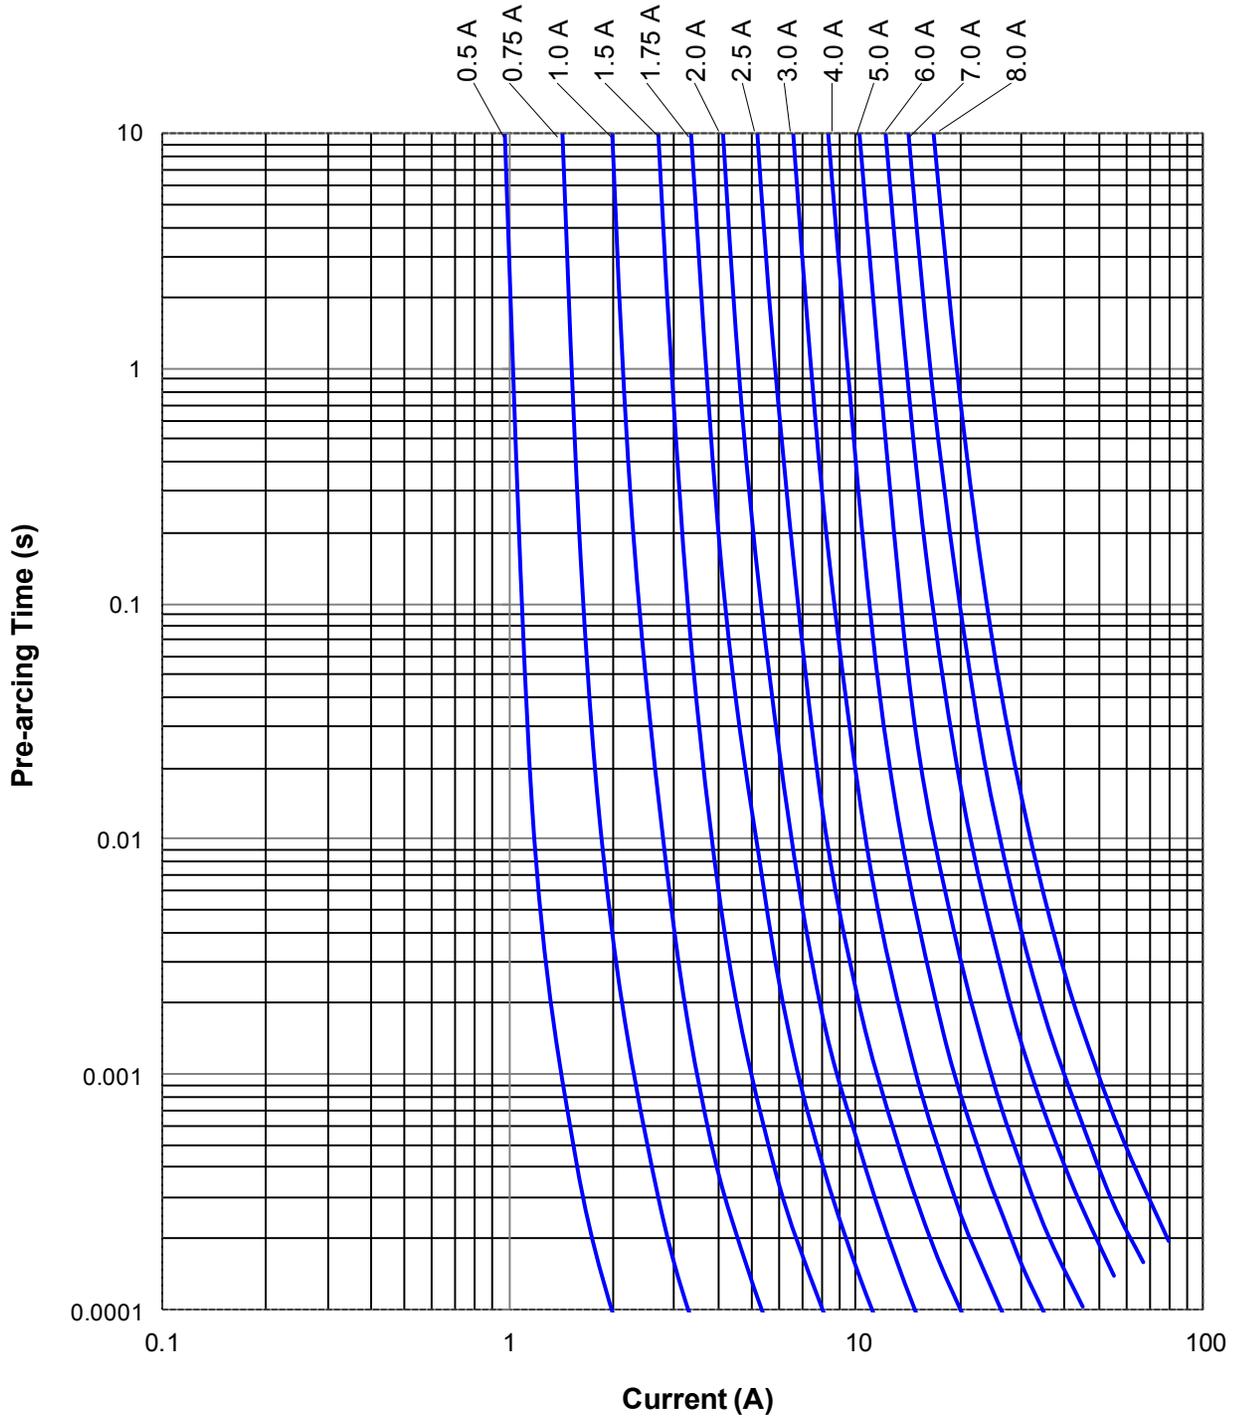

# SolidMatrix<sup>®</sup> Surface Mount Fuses

## FA Series (Fast Acting), 1206 Size

### Average $I^2t$ vs. $t$ Curves:

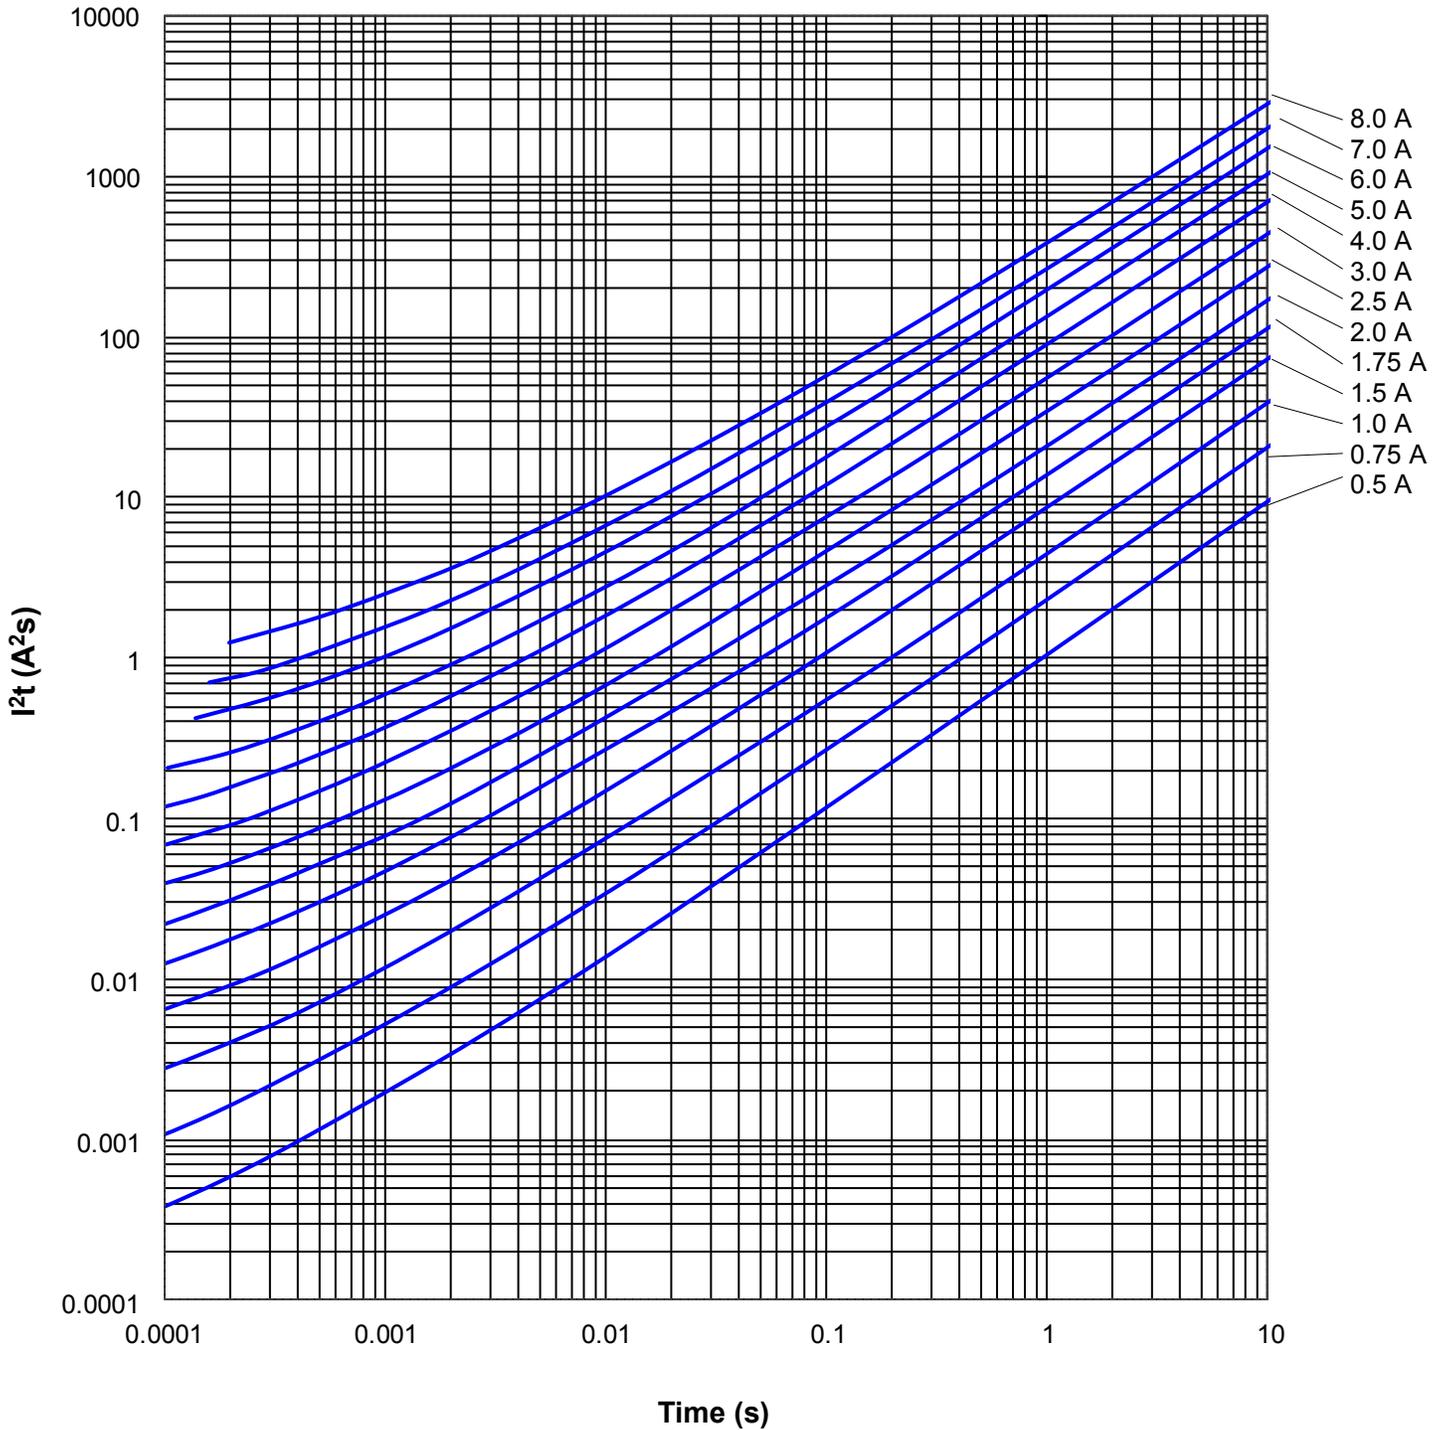

## SolidMatrix® Surface Mount Fuses

### FA Series (Fast Acting), 0603 Size



#### Features:

- Multilayer monolithic structure with glass ceramic body and silver fusing element
- Silver termination with nickel and pure-tin solder plating, providing excellent solderability
- Compatible with both wave and reflow soldering processes
- Operating temperature range: -55°C to +125°C (with de-rating)

#### Clearing Time Characteristics:

% of current rating	Clearing time at 25°C
100%	4 hours min.
250%	5 seconds max.
400%	0.05 seconds max.

#### Shape and Dimensions:


Unit	Inch	mm
L	0.063 ± 0.006	1.60 ± 0.15
W	0.031 ± 0.006	0.80 ± 0.15
T	0.031 ± 0.006	0.80 ± 0.15
B	0.014 ± 0.006	0.36 ± 0.15

#### Agency Approval:

Recognized Under the Components Program of UL.  
File Number: E232989.

#### Patents:

Patent numbers "US6,034,589", "US6,602,766", "US7,268,661 B2", "ZL00134544.3", "ZL02114719.1", "ZL200410104280.7", "ZL201020551360.8", "ZL201010299185.2", "ZL201220030614.0", "ZL201210020693.1".

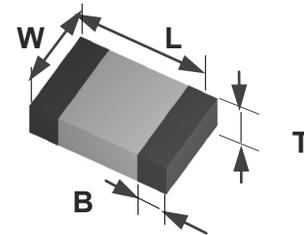

#### Ordering Information:

Part Number	Current Rating (A)	Voltage Rating (VDC)	Interrupting Ratings	Nominal Cold DCR ( $\Omega$ ) <sup>1</sup>	Nominal I <sup>2</sup> t (A <sup>2</sup> s) <sup>2</sup>	Marking (Optional) <sup>3</sup>
F0603FA0500V063T	0.5	63	35 A at rated voltages	0.485	0.003	C
F0603FA0750V063T	0.75	63		0.254	0.006	D
F0603FA1000V063T	1.0	63		0.147	0.013	E
F0603FA1500V063T	1.5	63		0.059	0.030	G
F0603FA2000V032T	2.0	32		0.044	0.060	I
F0603FA2500V032T	2.5	32		0.032	0.10	J
F0603FA3000V032T	3.0	32		0.025	0.18	K
F0603FA3500V032T	3.5	32		0.024	0.30	L
F0603FA4000V032T	4.0	32		0.018	0.50	M
F0603FA5000V032T	5.0	32		0.013	0.80	N
F0603FA6000V024T	6.0	24		0.010	1.10	O


1. Measured at ≤ 10% rated current and 25°C ambient.

2. Melting I<sup>2</sup>t at 0.001 second pre-arcing time.

3. Black Marking Character Code.

**SolidMatrix® Surface Mount Fuses**  
**FA Series (Fast Acting), 0603 Size**


**Average Pre-arcing Time Curves:**

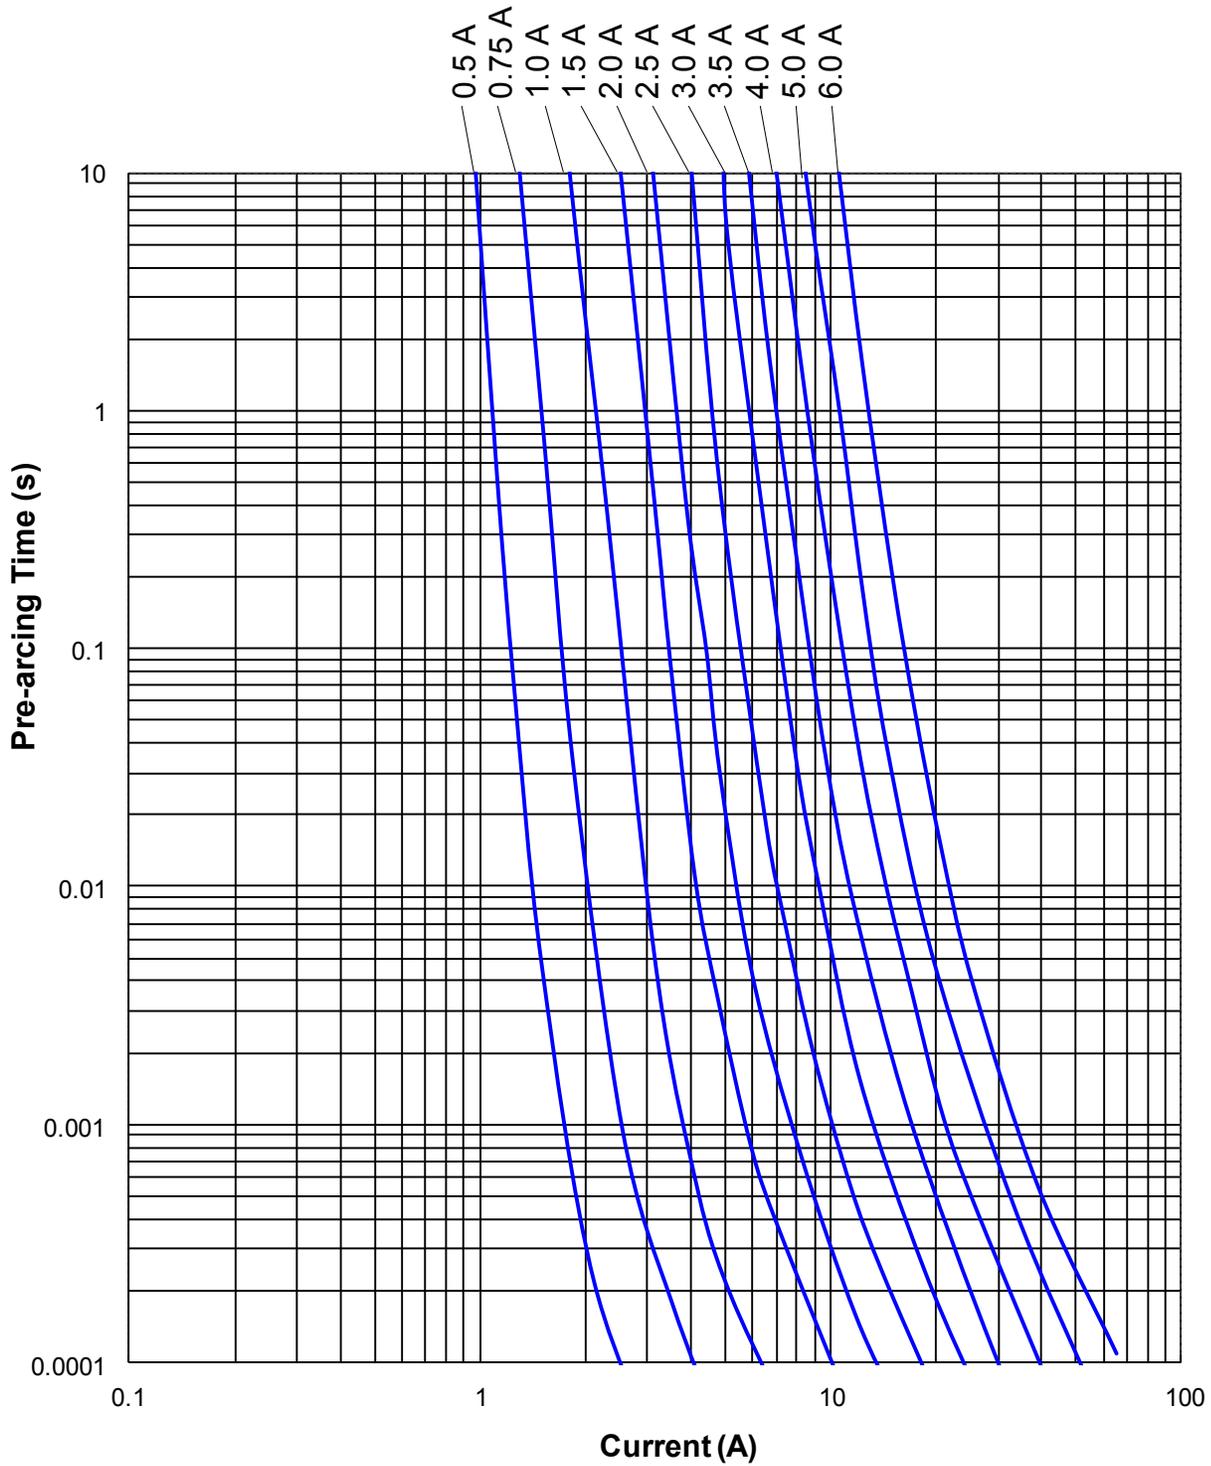

# SolidMatrix® Surface Mount Fuses

## FA Series (Fast Acting), 0603 Size

### Average $I^2t$ vs. $t$ Curves:

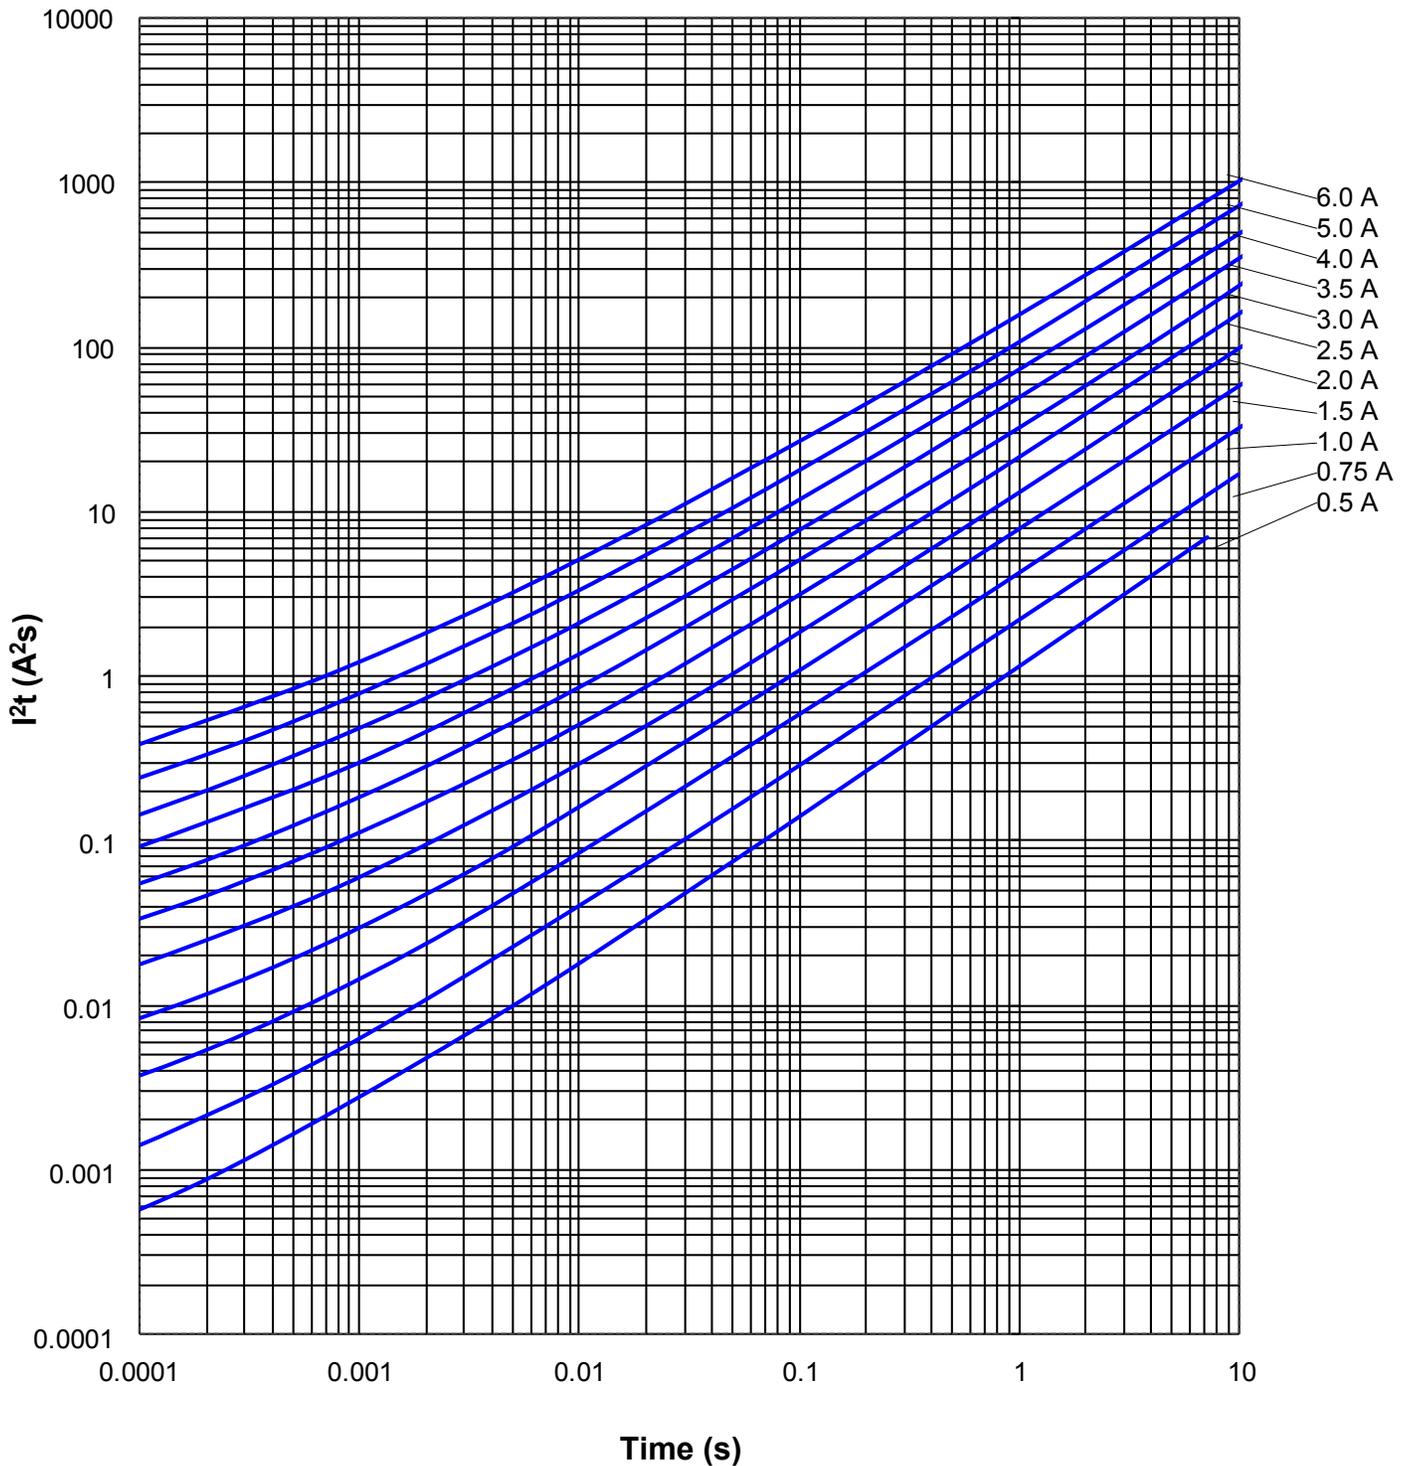

## SolidMatrix® Surface Mount Fuses

### FA Series (Fast Acting), 0402 Size



#### Features:

- Multilayer monolithic structure with glass ceramic body and silver fusing element
- Silver termination with nickel and pure-tin solder plating, providing excellent solderability
- Compatible with both wave and reflow soldering processes
- Operating temperature range: -55°C to +125°C (with de-rating)

#### Clearing Time Characteristics:

% of current rating	Clearing time at 25°C
100%	4 hours min.
250%	5 seconds max.
400%	0.05 seconds max.

#### Agency Approval:


Recognized Under the Components Program of UL.  
File Number: E232989.

#### Patents:

Patent numbers "US6,034,589", "US6,602,766", "US7,268,661 B2", "ZL00134544.3", "ZL02114719.1", "ZL200410104280.7", "ZL201020551360.8", "ZL201010299185.2", "ZL201220030614.0", "ZL201210020693.1".

#### Shape and Dimensions:

Unit	Inch	mm
L	0.039 ± 0.004	1.00 ± 0.10
W	0.020 ± 0.004	0.51 ± 0.10
T	0.020 ± 0.004	0.51 ± 0.10
B	0.010 ± 0.004	0.25 ± 0.10

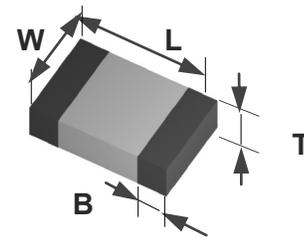

#### Ordering Information:


Part Number	Current Rating (A)	Voltage Rating (VDC)	Interrupting Ratings	Nominal Cold DCR ( $\Omega$ ) <sup>1</sup>	Nominal $I^2t$ ( $A^2s$ ) <sup>2</sup>
F0402FA0500V024T	0.5	24	35 A at rated voltage	0.380	0.004
F0402FA0750V024T	0.75	24		0.210	0.007
F0402FA1000V024T	1.0	24		0.120	0.014
F0402FA1500V024T	1.5	24		0.056	0.050
F0402FA2000V024T	2.0	24		0.035	0.070
F0402FA3000V024T	3.0	24		0.021	0.11
F0402FA4000V024T	4.0	24		0.014	0.21

1. Measured at  $\leq 10\%$  rated current and 25°C ambient.  
2. Melting  $I^2t$  at 0.001 second pre-arcing time.

# SolidMatrix<sup>®</sup> Surface Mount Fuses

## FA Series (Fast Acting), 0402 Size


### Average Pre-arcing Time Curves:

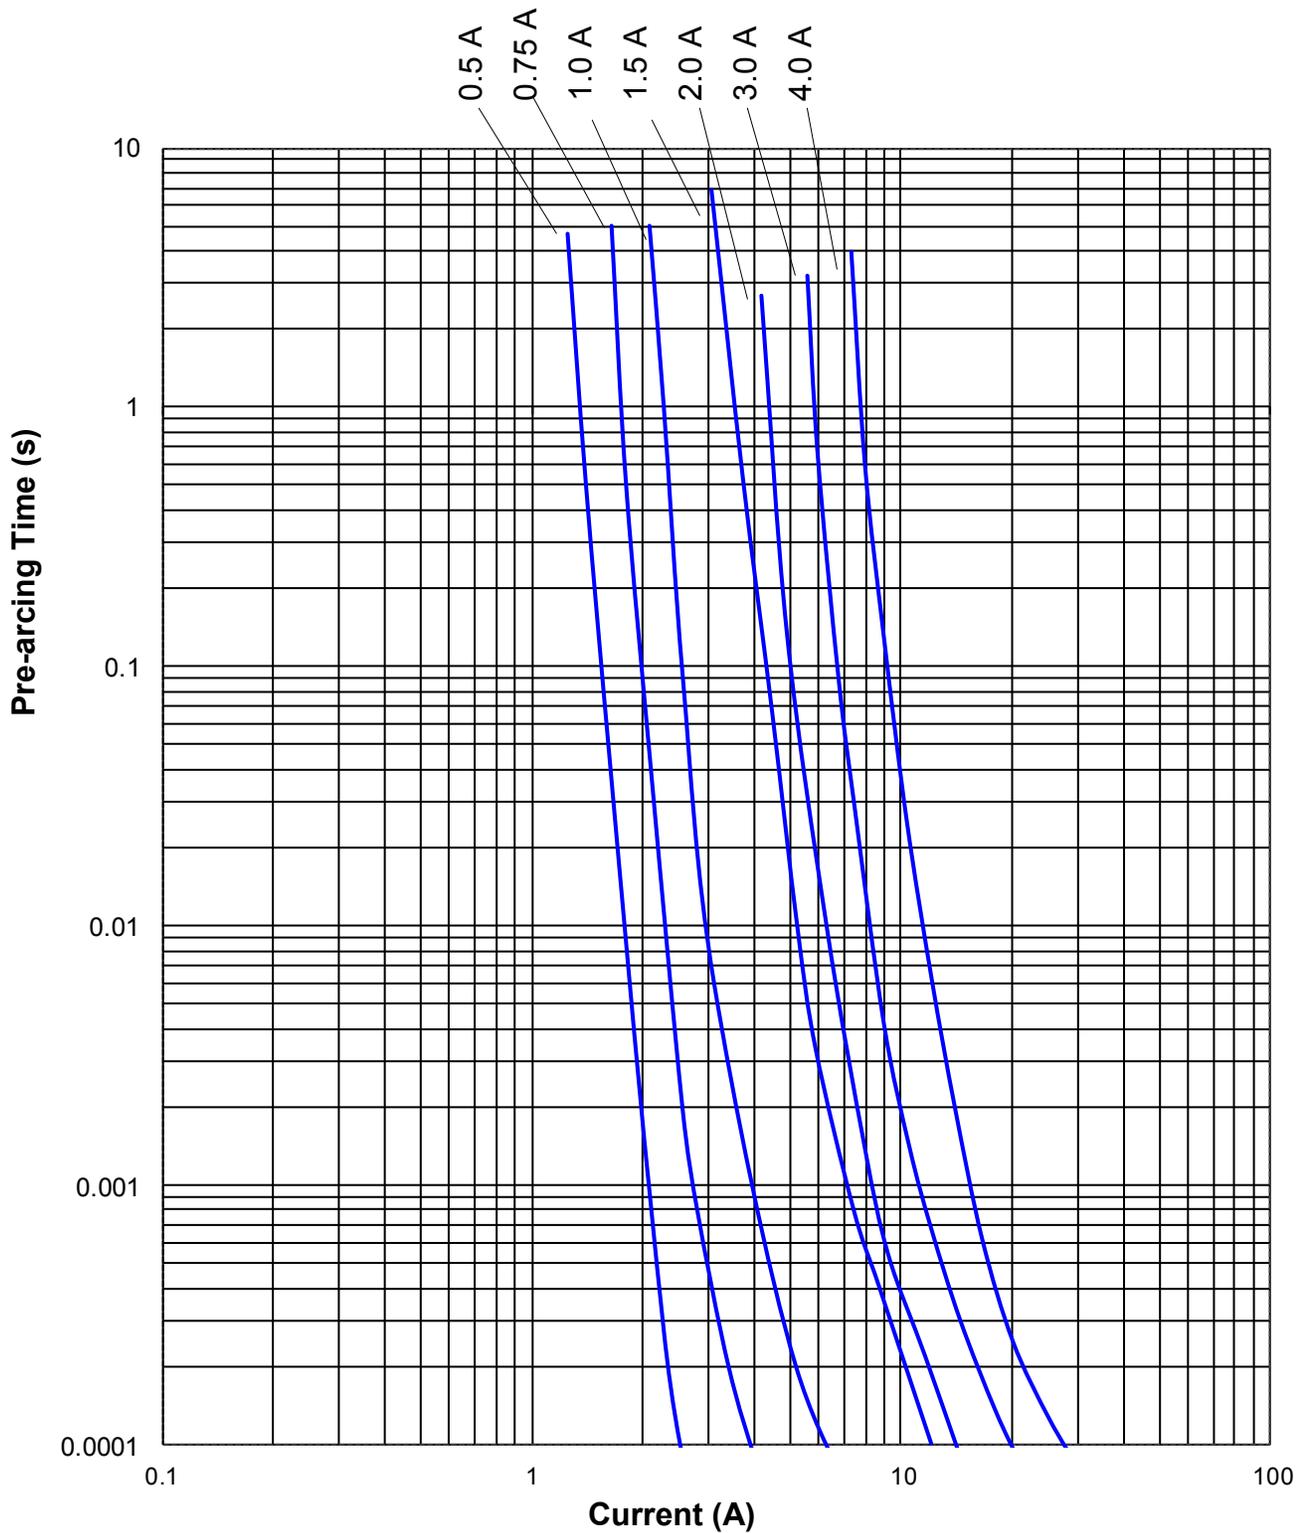

# SolidMatrix<sup>®</sup> Surface Mount Fuses

## FA Series (Fast Acting), 0402 Size

### Average $I^2t$ vs. $t$ Curves:

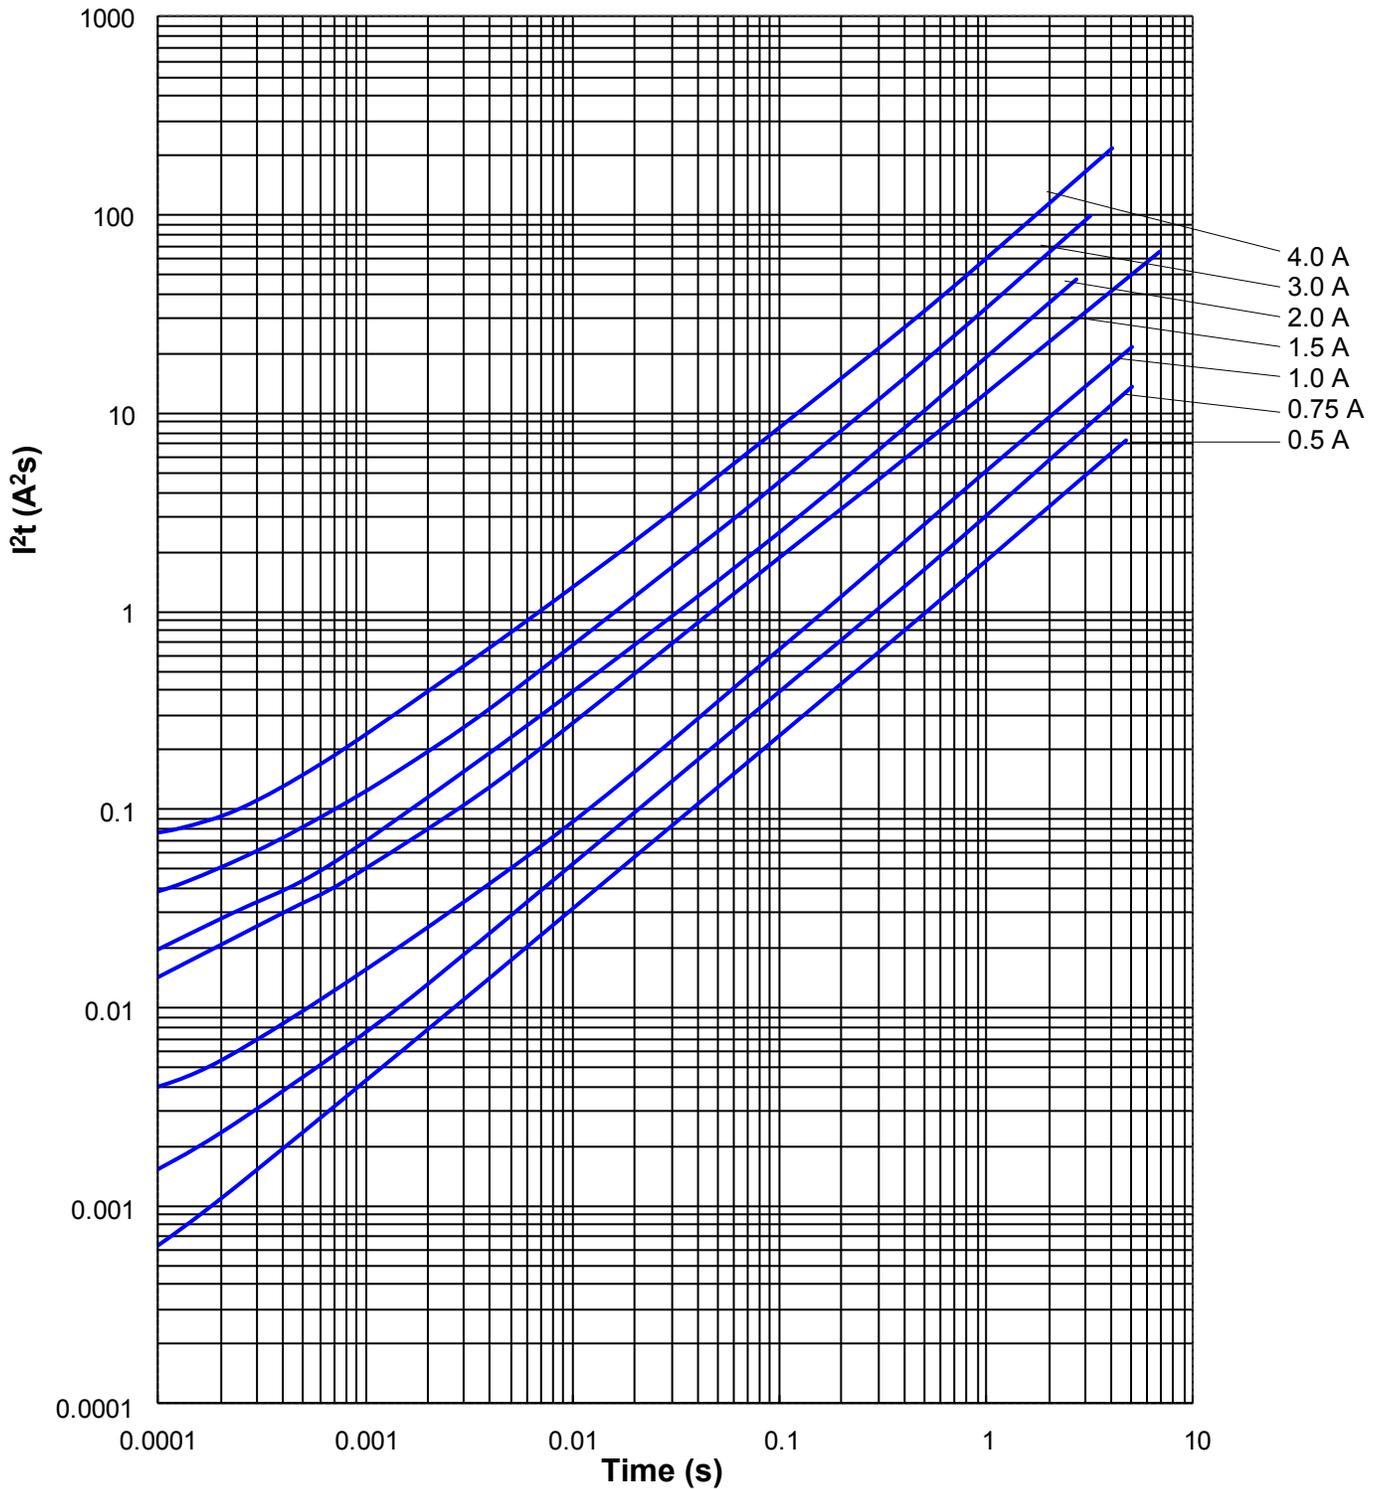

## SolidMatrix® Surface Mount Fuses

### SB Series (Slow Blow), 1206 Size



#### Features:

- High inrush current withstanding capability
- Multilayer monolithic structure with glass ceramic body and silver fusing element
- Silver termination with nickel and pure-tin solder plating, providing excellent solderability
- Compatible with both wave and reflow soldering processes
- Operating temperature range: -55°C to +125°C (with de-rating)

#### Clearing Time Characteristics:

% of current rating	Clearing time at 25°C	
	min.	max.
100%	4 hours	
200%	1 second	120 seconds
300%	0.1 seconds	3 seconds
800%	0.002 seconds	0.05 seconds

#### Shape and Dimensions:


Unit	Inch	mm
L	0.126 ± 0.008	3.20 ± 0.20
W	0.063 ± 0.008	1.60 ± 0.20
T	0.038 ± 0.008	0.97 ± 0.20
B	0.020 ± 0.010	0.51 ± 0.25

#### Agency Approval:

Recognized Under the Components Program of UL.  
File Number: E232989.

#### Patents:

Patent numbers "US6,034,589", "US6,602,766", "US7,268,661 B2", "ZL00134544.3", "ZL02114719.1", "ZL200410104280.7", "ZL201020551352.3", "ZL201020551360.8", "ZL201010299185.2", "ZL201220030614.0", "ZL201210020693.1".

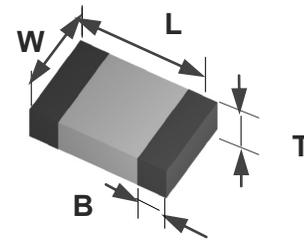

#### Ordering Information:

Part Number	Current Rating (A)	Voltage Rating (VDC)	Interrupting Ratings	Nominal Cold DCR (Ω) <sup>1</sup>	Nominal I <sup>2</sup> t (A <sup>2</sup> s) <sup>2</sup>	Marking (Optional) <sup>3</sup>	
F1206SB1000V063T	1.0	63	50 A at rated voltages	0.360	0.11	E	
F1206SB1250V063T	1.25	63		0.200	0.22	F	
F1206SB1500V063T	1.5	63		0.150	0.23	G	
F1206SB2000V063T	2.0	63		0.088	0.63	I	
F1206SB2500V032T	2.5	32		0.065	0.90	J	
F1206SB3000V032T	3.0	32		0.034	1.20	K	
F1206SB3500V032T	3.5	32		0.028	1.60	L	
F1206SB4000V032T	4.0	32		0.024	2.20	M	
F1206SB4500V032T	4.5	32		0.020	3.60	T	
F1206SB5000V032T	5.0	32		0.018	5.30	N	
F1206SB5500V024T	5.5	24		0.014	6.40	U	
F1206SB6000V024T	6.0	24		60 A at rated voltage	0.011	8.50	O
F1206SB7000V024T	7.0	24			0.010	10.0	P
F1206SB8000V024T	8.0	24	0.009		16.9	R	

1. Measured at ≤ 10% rated current and 25°C ambient.


2. Melting I<sup>2</sup>t at 0.001 second pre-arcing time.

3. Red Marking Character Code.

# SolidMatrix® Surface Mount Fuses

## SB Series (Slow Blow), 1206 Size


### Average Pre-arcing Time Curves:

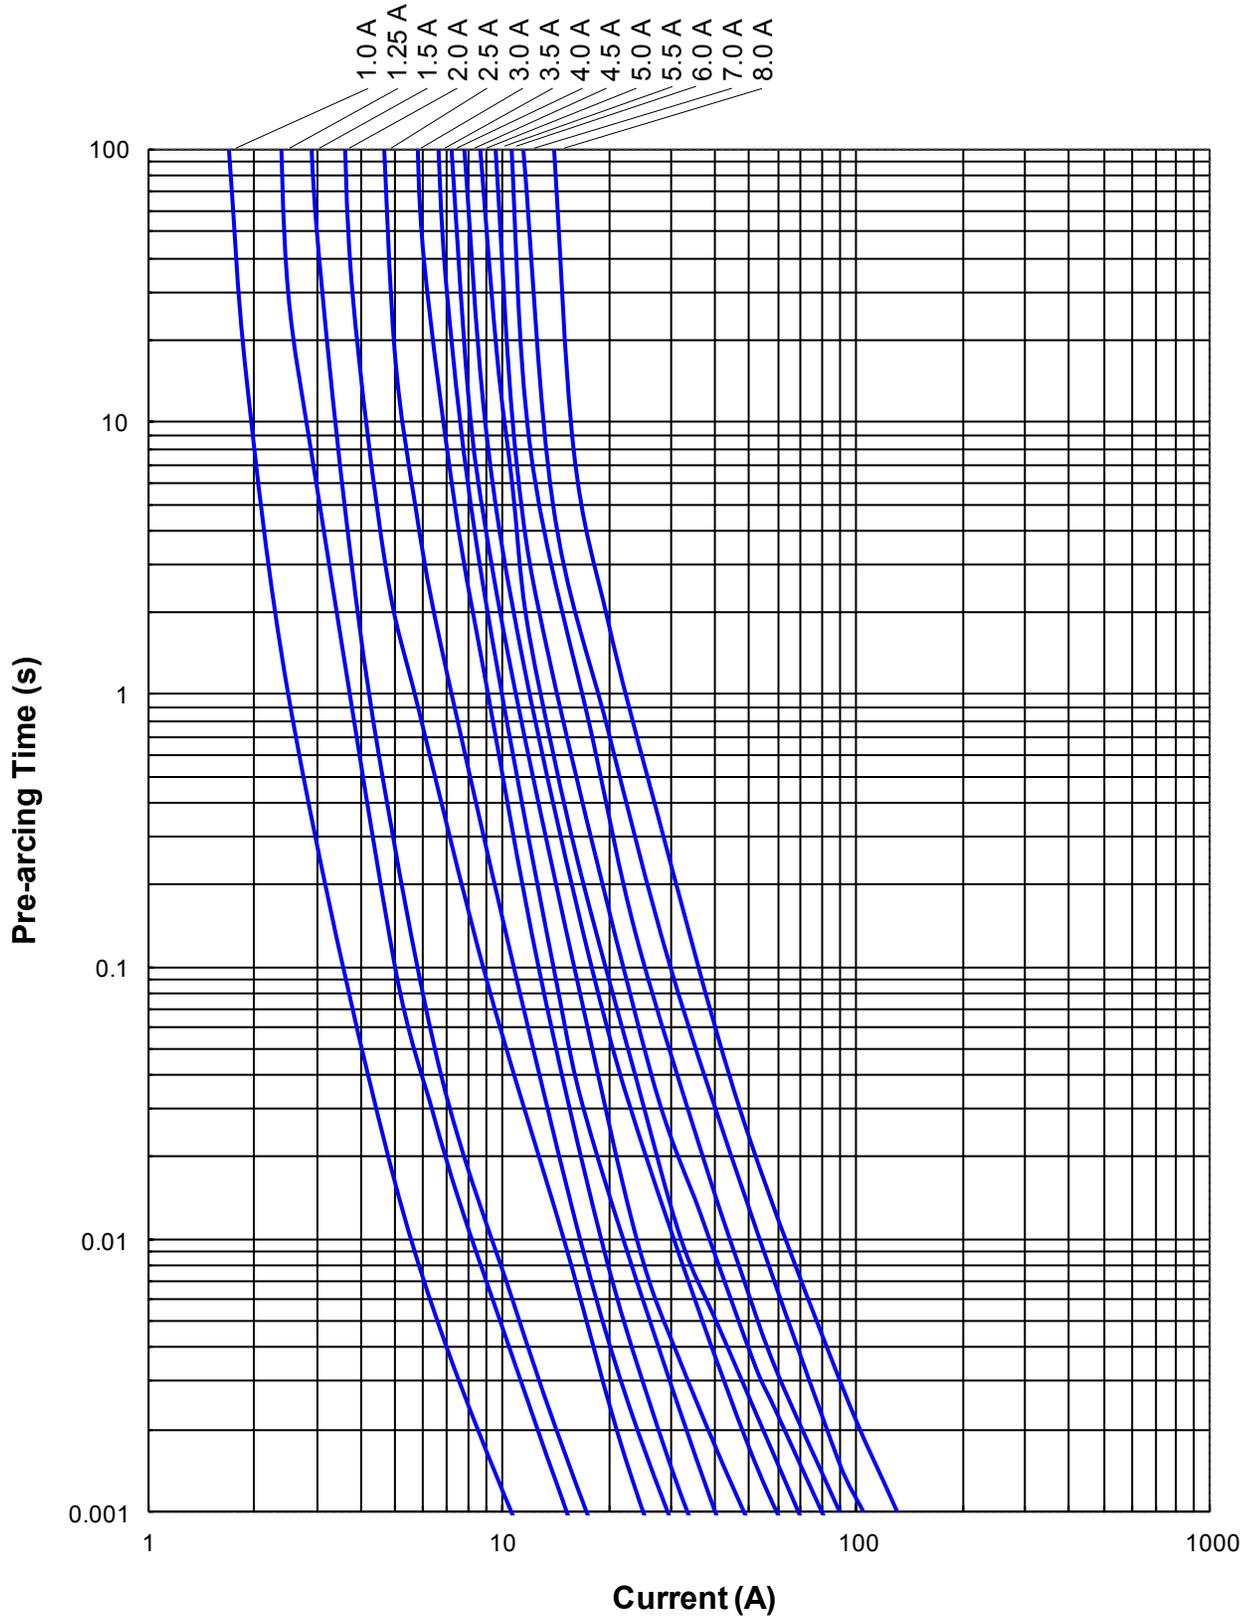

# SolidMatrix<sup>®</sup> Surface Mount Fuses


## SB Series (Slow Blow), 1206 Size

### Average $I^2t$ vs. $t$ Curves:

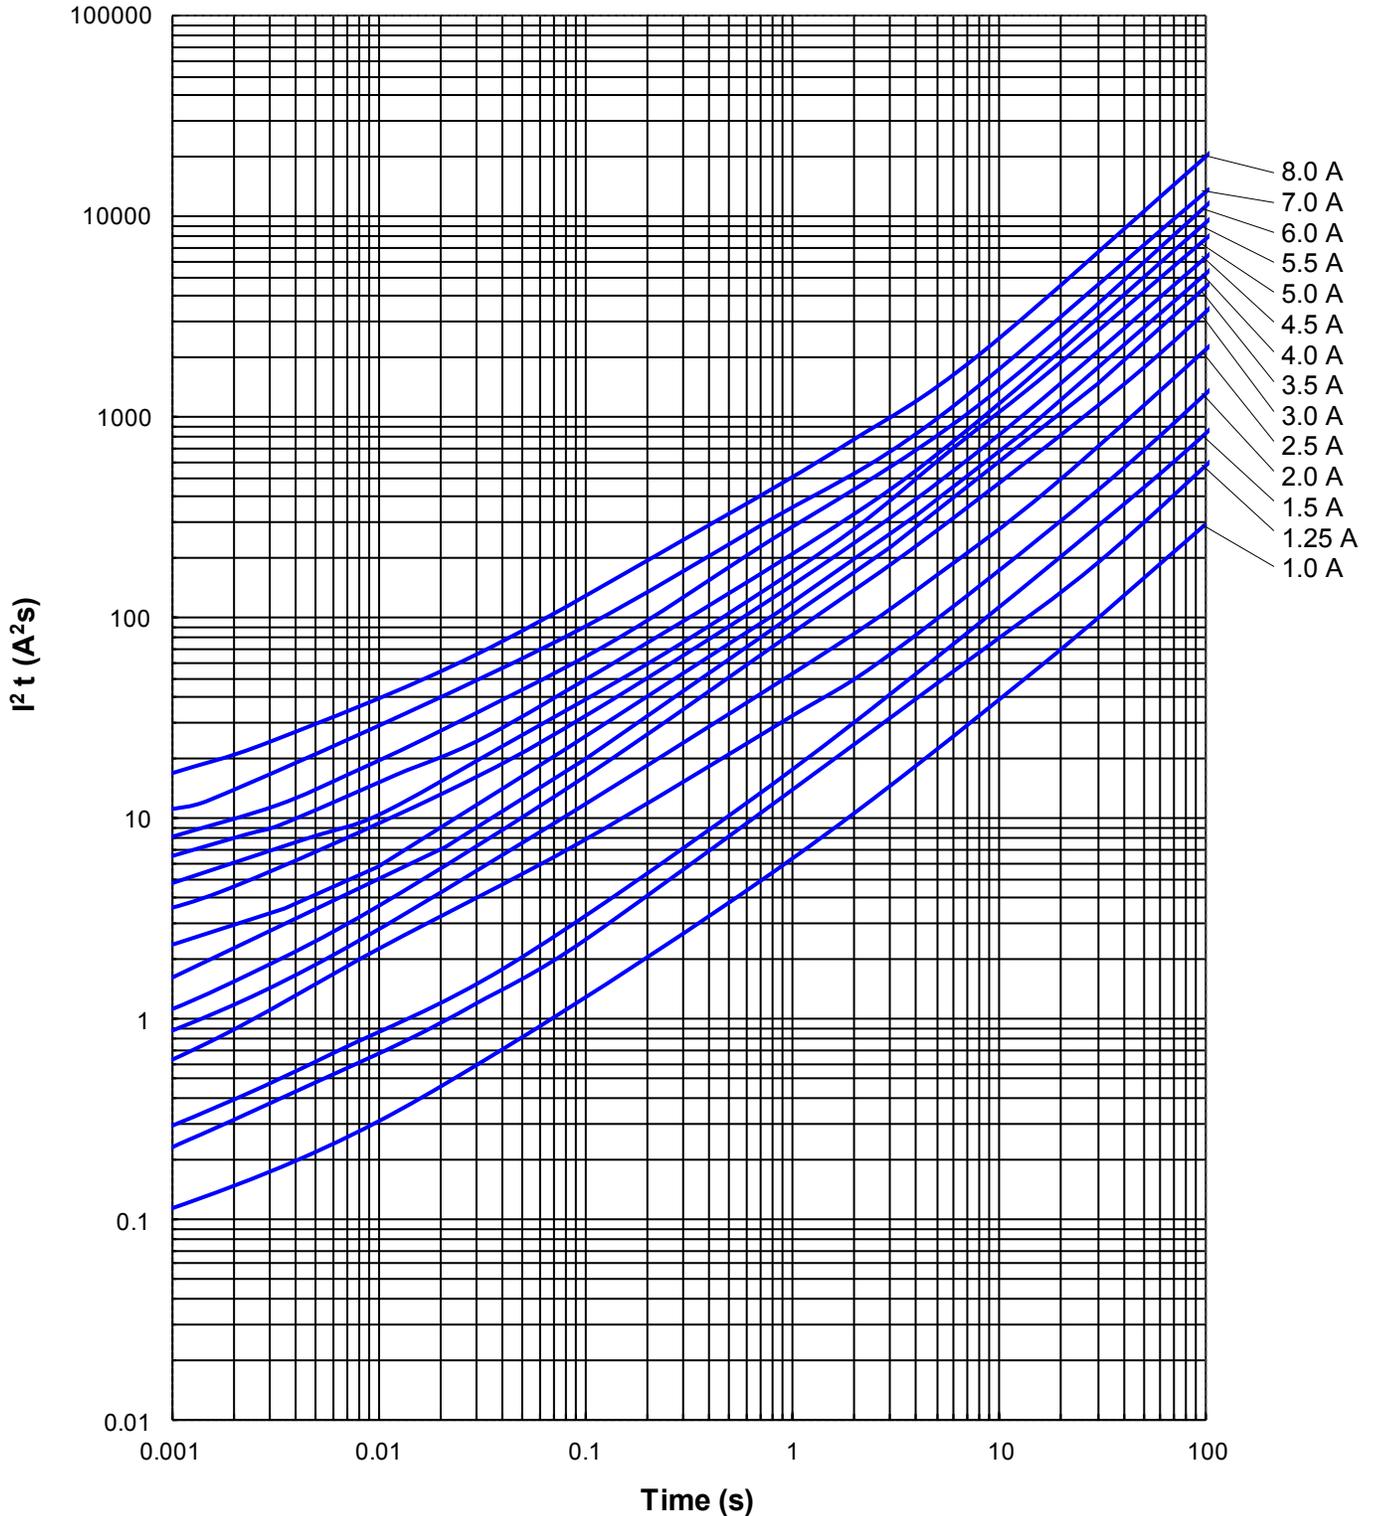

## SolidMatrix® Surface Mount Fuses

### SB Series (Slow Blow), 0603 Size

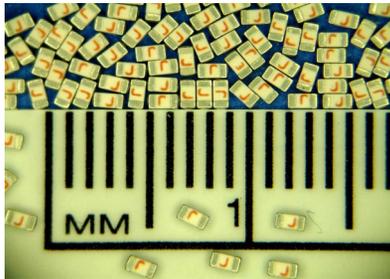

#### Features:


- High inrush current withstanding capability
- Ceramic Monolithic structure
- Silver fusing element and silver termination with nickel and tin plating
- Symmetrical design with marking on both sides (optional)
- Operating temperature range: -55°C to +125°C (with de-rating)

#### Clearing Time Characteristics:

% of Current Rating	Clearing time at 25°C	
	4 hours min.	120 seconds max.
100%	4 hours min.	
200%	1 second min.	120 seconds max.
300%	0.1 seconds min.	3 seconds max.
800% (1 A - 1.5 A)	0.0005 seconds min.	0.05 seconds max.
800% (2 A - 8 A)	0.001 seconds min.	0.05 seconds max.

#### Shape and Dimensions:

Unit	Inch	mm
L	0.063 ± 0.006	1.60 ± 0.15
W	0.031 ± 0.006	0.80 ± 0.15
T	0.031 ± 0.006	0.80 ± 0.15
B	0.014 ± 0.006	0.36 ± 0.15

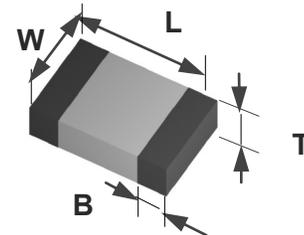

#### Agency Approval:

Recognized Under the Components Program of UL.  
File Number: E232989.

#### Patents:

Patent numbers "US6,034,589", "US6,602,766", "US7,268,661 B2", "ZL00134544.3", "ZL02114719.1", "ZL200410104280.7", "ZL201020551352.3", "ZL201020551360.8", "ZL201010299185.2", "ZL201220030614.0", "ZL201210020693.1.

#### Ordering Information:


Part Number	Current Rating (A)	Voltage Rating (VDC)	Interrupting Ratings	Nominal Cold DCR(Ω) <sup>1</sup>	Nominal I <sup>2</sup> t (A <sup>2</sup> s) <sup>2</sup>	Marking (Optional) <sup>3</sup>
F0603SB1000V032T	1.0	32	50 A at rated voltage	0.200	0.093	E
F0603SB1500V032T	1.5	32		0.100	0.18	G
F0603SB2000V032T	2.0	32		0.052	0.32	I
F0603SB2500V032T	2.5	32		0.041	0.63	J
F0603SB3000V032T	3.0	32		0.031	0.87	K
F0603SB3500V032T	3.5	32		0.021	1.20	L
F0603SB4000V032T	4.0	32		0.017	2.30	M
F0603SB4500V032T	4.5	32		0.015	2.70	T
F0603SB5000V032T	5.0	32	0.013	3.20	N	
F0603SB6000V032T	6.0	32	80 A at rated voltage	0.010	4.00	O
F0603SB7000V032T	7.0	32		0.008	5.00	P
F0603SB8000V032T	8.0	32		0.006	7.00	R

1. Measured at ≤ 10% rated current and 25°C ambient. 2. Melting I<sup>2</sup>t at 0.001 second pre-arcing time. 3. Red Marking Character Code.

# SolidMatrix<sup>®</sup> Surface Mount Fuses

## SB Series (Slow Blow), 0603 Size


### Average Pre-arcing Time Curves:

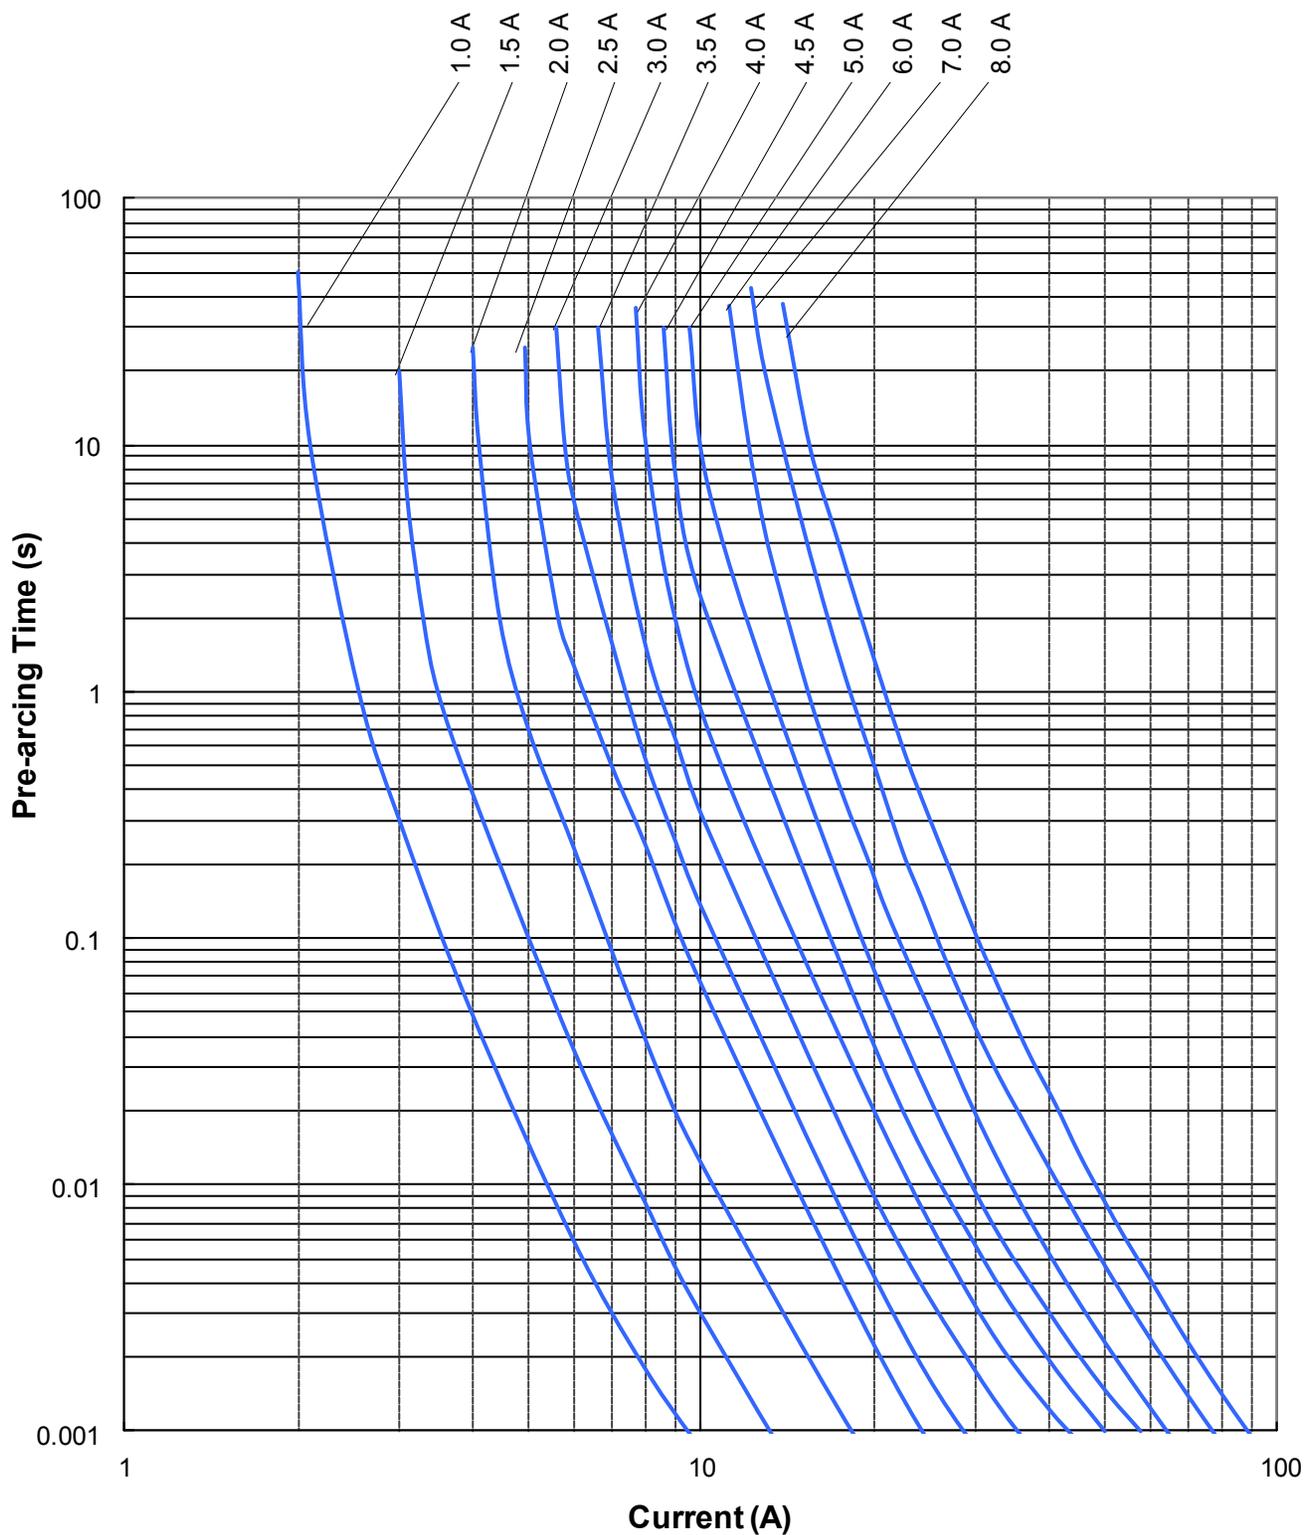

# SolidMatrix<sup>®</sup> Surface Mount Fuses

## SB Series (Slow Blow), 0603 Size

### Average $I^2t$ vs. $t$ Curves:

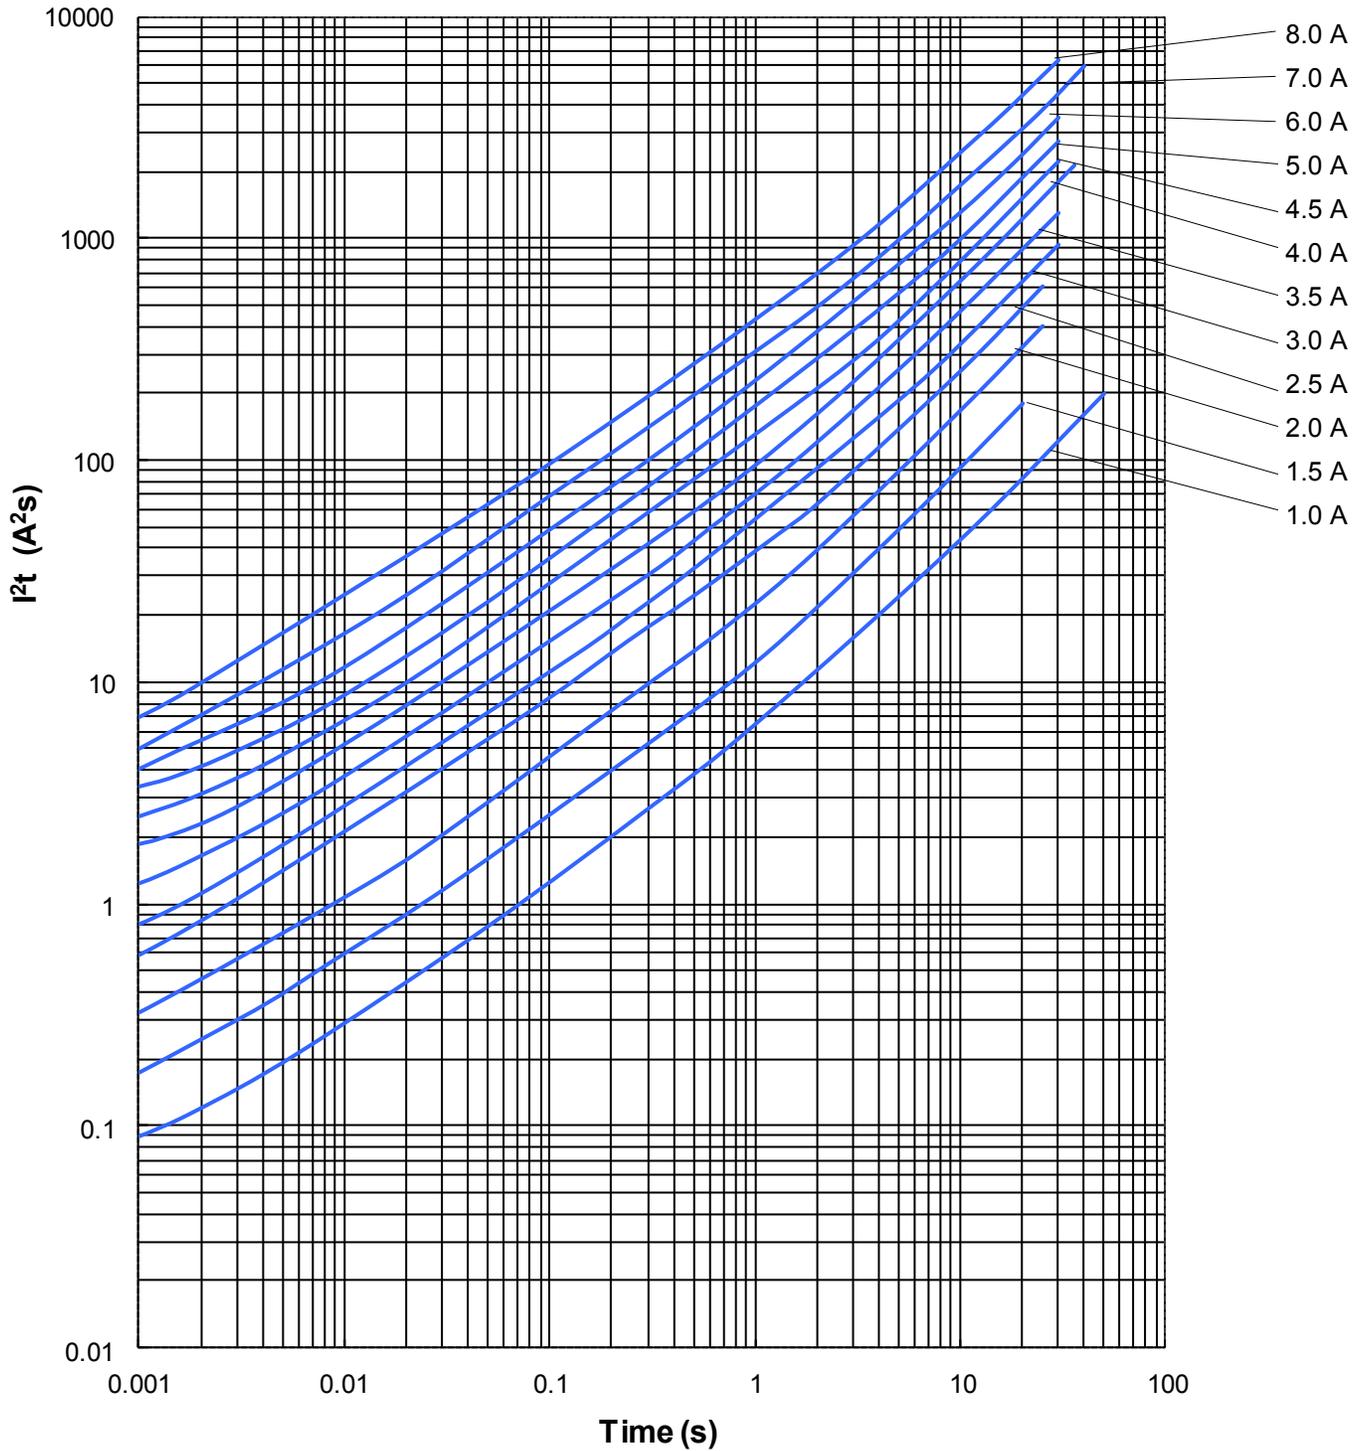

# SolidMatrix® Surface Mount Fuses

## HI Series (High Inrush), 1206 Size



### Features:


- High inrush current withstanding capability
- Ceramic Monolithic structure
- Silver fusing element and silver termination with nickel and tin plating
- Symmetrical design with marking on both sides (optional)
- Operating temperature range: -55°C to +125°C (with de-rating)

### Clearing Time Characteristics:

% of Current Rating	Clearing time at 25°C	
	min.	max.
100%	4 hours	
200%	1 second	60 seconds
1000%(1.0 A -5.0 A)	0.0002 seconds	0.02 seconds
1000%(6.0 A -8.0 A)	0.0002 seconds	0.04 seconds

### Shape and Dimensions:

Unit	Inch	mm
L	0.126 ± 0.008	3.20 ± 0.20
W	0.063 ± 0.008	1.60 ± 0.20
T	0.038 ± 0.008	0.97 ± 0.20
B	0.020 ± 0.010	0.51 ± 0.25

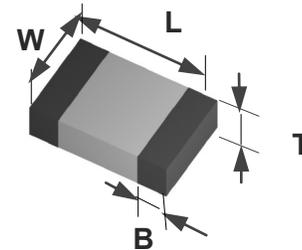

### Agency Approval:

Recognized Under the Components Program of UL.  
File Number: E232989.

### Patents:

Patent numbers "US6,034,589", "US6,602,766", "US7,268,661 B2", "ZL00134544.3", "ZL02114719.1", "ZL200410104280.7", "ZL201020551360.8", "ZL201010299185.2", "ZL201220030614.0", "ZL201210020693.1".

### Ordering Information:


Part Number	Current Rating (A)	Voltage Rating (VDC)	Interrupting Ratings	Nominal Cold DCR(Ω) <sup>1</sup>	Nominal I <sup>2</sup> t (A <sup>2</sup> s) <sup>2</sup>	Marking (Optional) <sup>3</sup>
F1206HI1000V063T	1.0	63	50 A at rated voltages	0.340	0.11	E
F1206HI1500V063T	1.5	63		0.150	0.33	G
F1206HI2000V063T	2.0	63		0.090	0.80	I
F1206HI2500V032T	2.5	32		0.065	1.19	J
F1206HI3000V032T	3.0	32		0.035	1.35	K
F1206HI3500V032T	3.5	32		0.029	1.84	L
F1206HI4000V032T	4.0	32		0.023	2.74	M
F1206HI4500V032T	4.5	32		0.021	3.20	T
F1206HI5000V032T	5.0	32	0.017	5.50	N	
F1206HI6000V024T	6.0	24	80 A at rated voltage	0.013	12.5	O
F1206HI7000V024T	7.0	24		0.010	30.0	P
F1206HI8000V024T	8.0	24		0.009	60.0	R

1. Measured at ≤ 10% rated current and 25°C ambient. 2. Melting I<sup>2</sup>t at 1000% of current rating. 3. Green Marking Character Code.

# SolidMatrix<sup>®</sup> Surface Mount Fuses

## HI Series (High Inrush), 1206 Size


### Average Pre-arcing Time Curves:

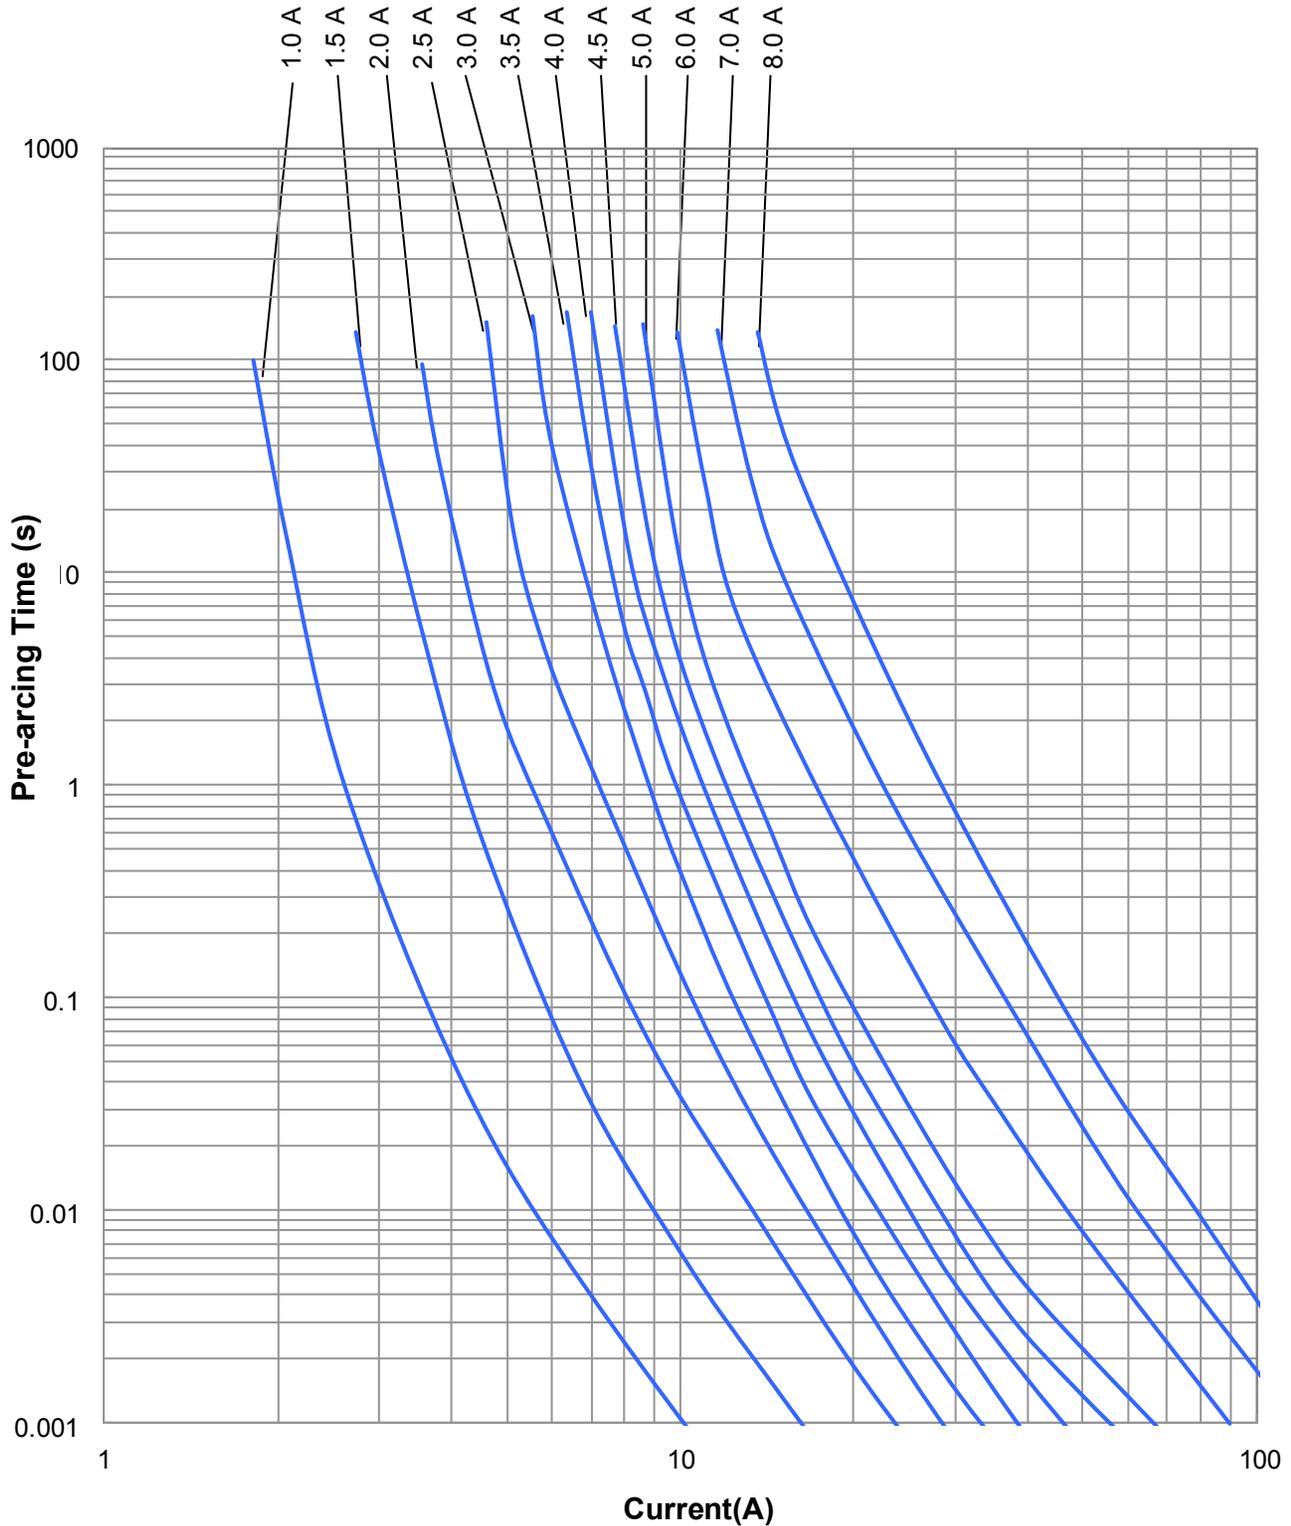

# SolidMatrix<sup>®</sup> Surface Mount Fuses


## HI Series (High Inrush), 1206 Size

### Average $I^2t$ vs. $t$ Curves:

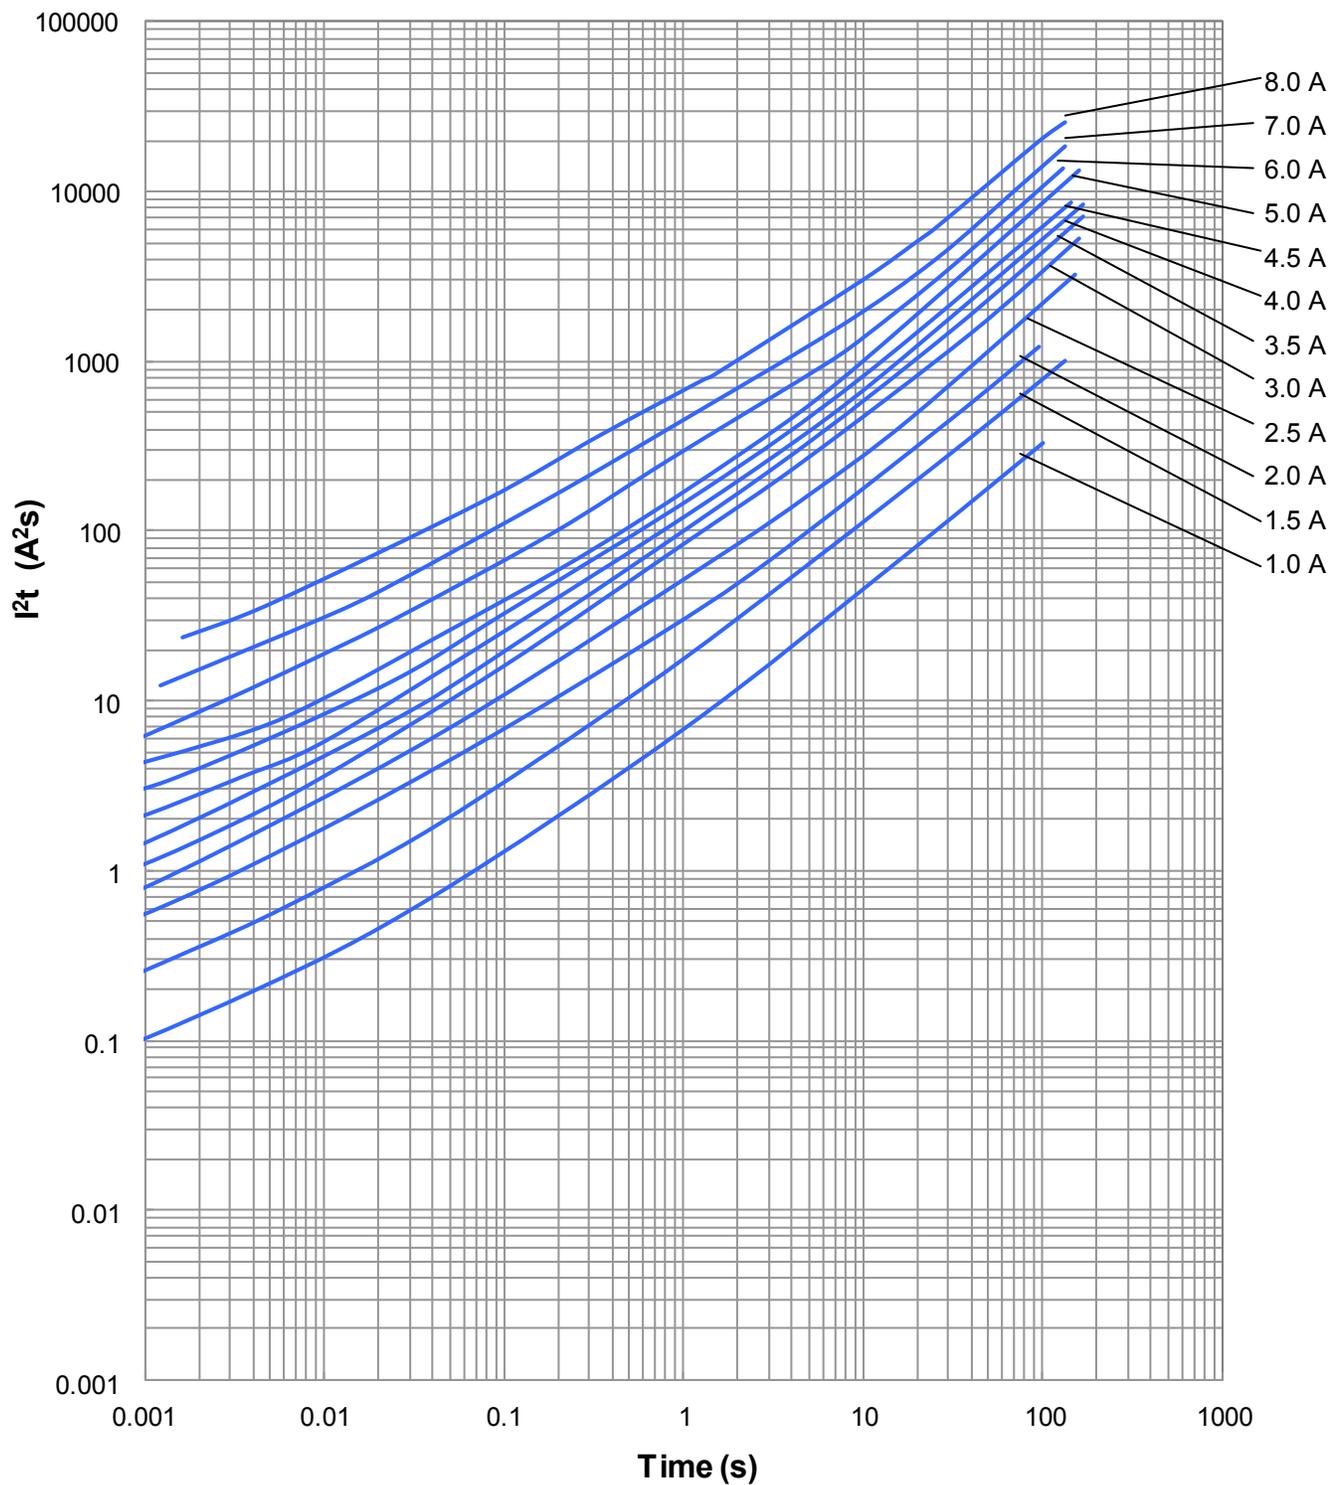

## SolidMatrix® Surface Mount Fuses

### HI Series (High Inrush), 0603 Size

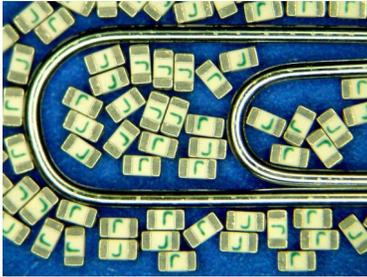

#### Features:

- High inrush current withstanding capability
- Ceramic Monolithic structure
- Silver fusing element and silver termination with nickel and tin plating
- Symmetrical design with marking on both sides (optional)
- Operating temperature range: -55°C to +125°C (with de-rating)

#### Clearing Time Characteristics:

% of Current Rating	Clearing time at 25°C	
	4 hours min.	60 seconds max.
100%	4 hours min.	
200%	1 second min.	60 seconds max.
1000% (1-5A)	0.0002 seconds min.	0.02 seconds max.

#### Shape and Dimensions:


Unit	Inch	mm
L	0.063 ± 0.006	1.60 ± 0.15
W	0.031 ± 0.006	0.80 ± 0.15
T	0.031 ± 0.006	0.80 ± 0.15
B	0.014 ± 0.006	0.36 ± 0.15

#### Agency Approval:

Recognized Under the Components Program of UL.  
File Number: E232989.

#### Patents:

Patent numbers "US6,034,589", "US6,602,766", "US7,268,661 B2", "ZL00134544.3", "ZL02114719.1", "ZL200410104280.7", "ZL201020551360.8", "ZL201010299185.2", "ZL201220030614.0", "ZL201210020693.1".

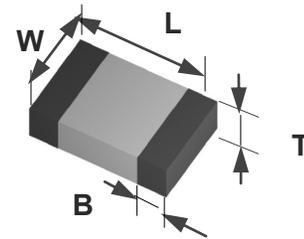

#### Ordering Information:

Part Number	Current Rating (A)	Voltage Rating (VDC)	Interrupting Ratings	Nominal Cold DCR(Ω) <sup>1</sup>	Nominal I <sup>2</sup> t (A <sup>2</sup> s) <sup>2</sup>	Marking (Optional) <sup>3</sup>
F0603HI1000V032T	1.0	32	50 A at rated voltage	0.210	0.08	E
F0603HI1500V032T	1.5	32		0.101	0.11	G
F0603HI2000V032T	2.0	32		0.057	0.24	I
F0603HI2500V032T	2.5	32		0.042	0.56	J
F0603HI3000V032T	3.0	32		0.030	0.72	K
F0603HI3500V032T	3.5	32		0.022	1.10	L
F0603HI4000V032T	4.0	32		0.018	2.08	M
F0603HI4500V032T	4.5	32		0.014	2.63	T
F0603HI5000V032T	5.0	32		0.013	3.25	N
F0603HI6000V032T	6.0	32	80 A at rated voltage	0.010	4.00	O
F0603HI7000V032T	7.0	32		0.008	5.00	P
F0603HI8000V032T	8.0	32		0.006	7.00	R


1. Measured at ≤ 10% rated current and 25°C ambient.

2. Melting I<sup>2</sup>t at 1000% of current rating.

3. Green Marking Character Code.

# SolidMatrix<sup>®</sup> Surface Mount Fuses HI Series (High Inrush), 0603 Size


## Average Pre-arcing Time Curves:

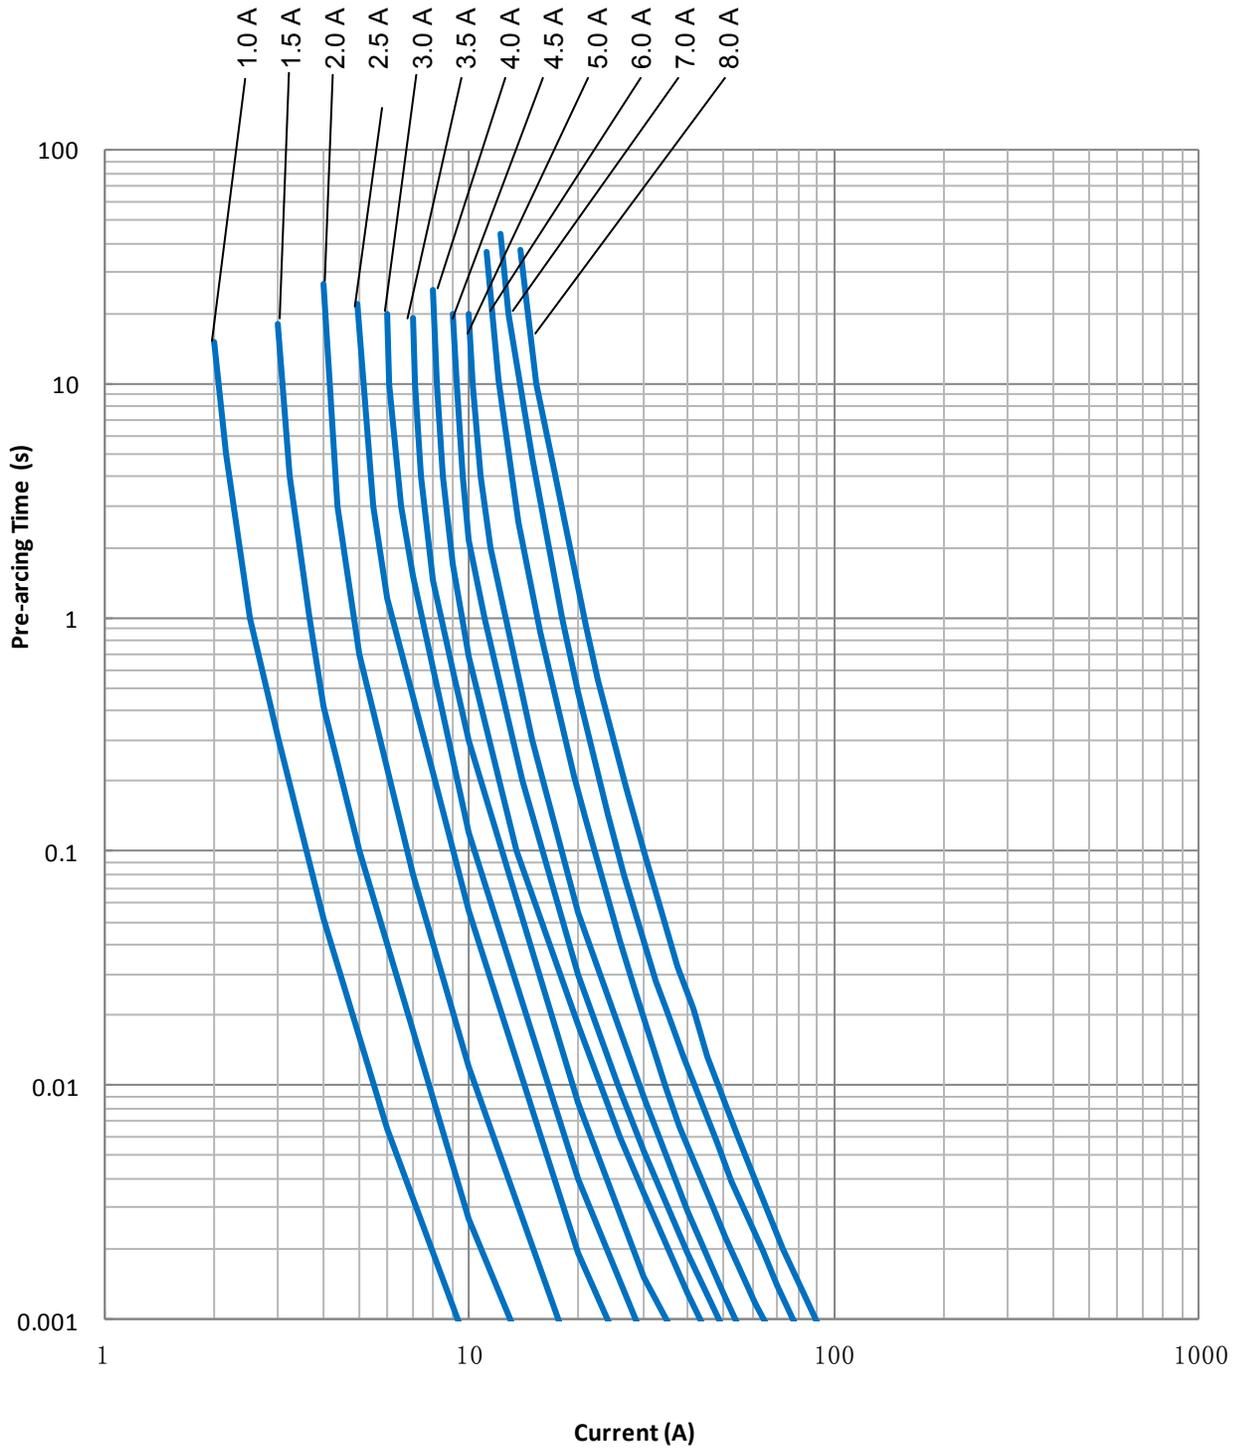

# SolidMatrix<sup>®</sup> Surface Mount Fuses

## HI Series (High Inrush), 0603 Size

### Average $I^2t$ vs. $t$ Curves:

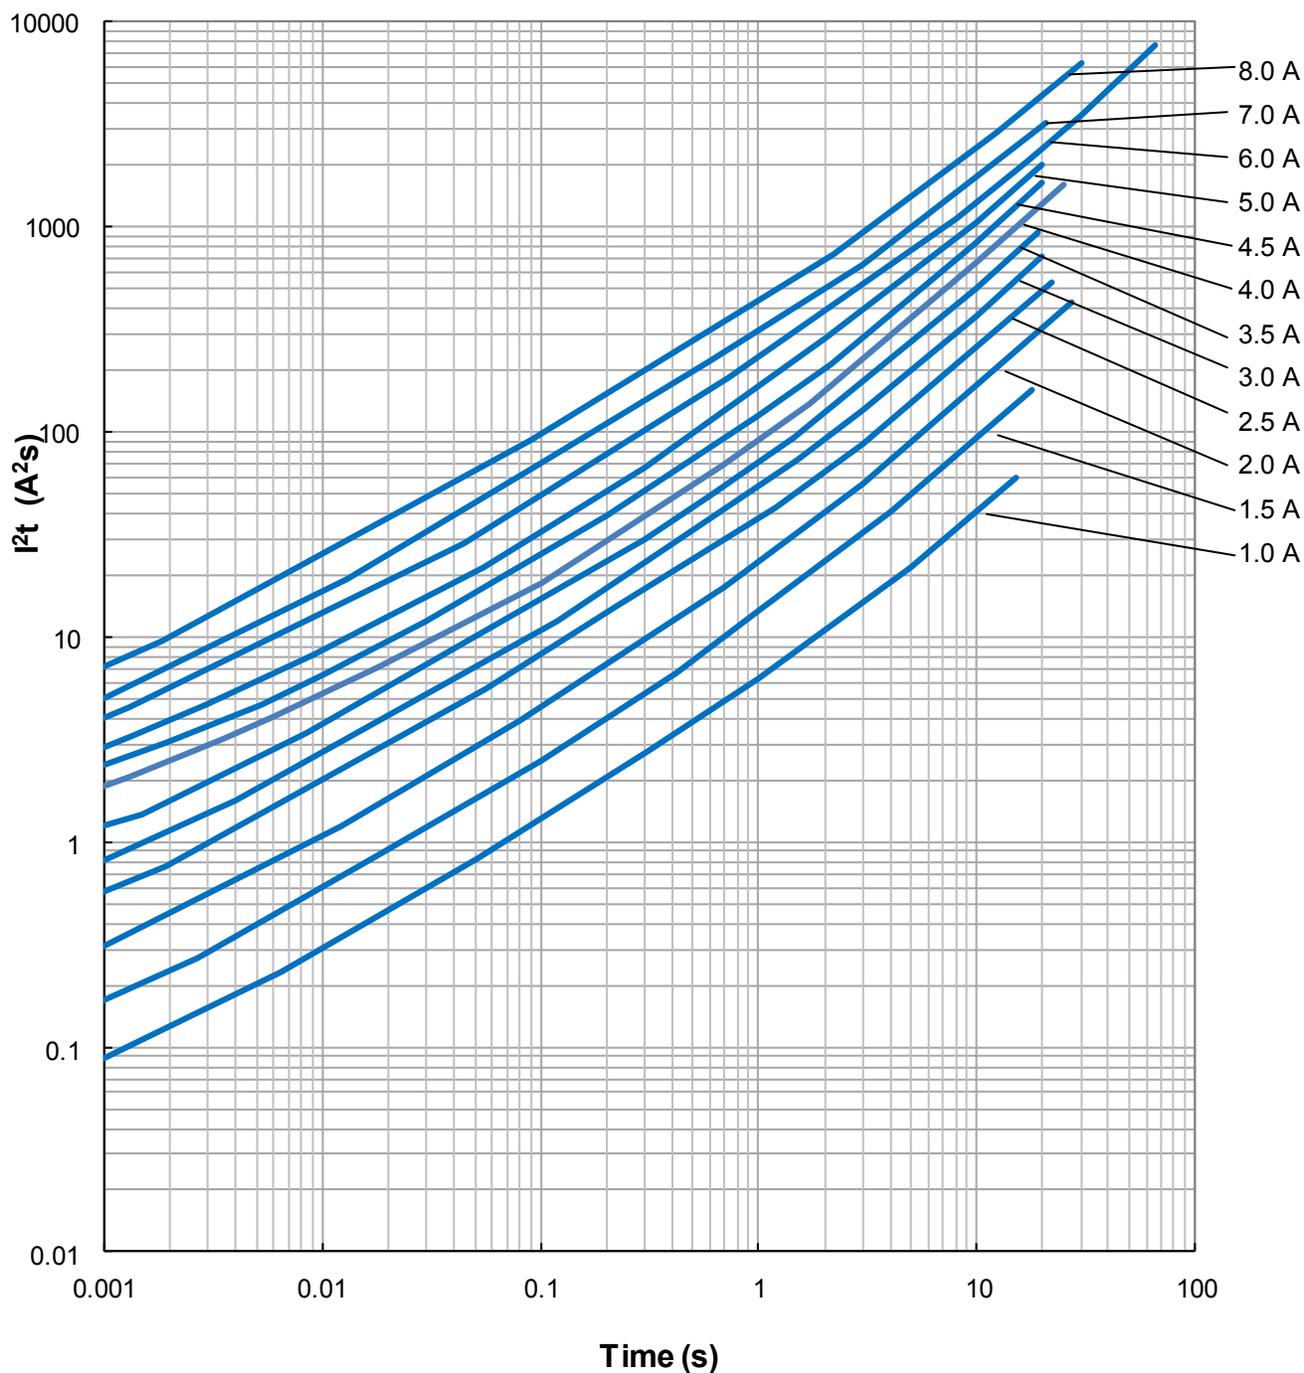

## SolidMatrix® Surface Mount Fuses

### HA Series (High Current), 1206 Size



#### Features:

- Special products for high current rating applications
- Glass ceramic monolithic structure
- Silver fusing element and silver termination with nickel and tin plating
- Superior arc suppression capability
- High current ratings
- Symmetrical design with marking on both sides (optional)
- Operating temperature range: -55°C to 125°C (with de-rating)

#### Clearing Time Characteristics:

% of current rating	Clearing time at 25°C
100%	4 hours min.
250%	5 seconds max.

#### Agency Approval:


Recognized Under the Components Program of UL.  
File Number: E232989.

#### Patents:

Patent numbers "US6,034,589", "US6,602,766", "US6,844,278", "ZL00134544.3", "ZL02114719.1", "ZL200810130656.X", "ZL201020551360.8", "ZL201010299185.2", "ZL201220030614.0", "ZL201210020693.1".

#### Shape and Dimensions:

Unit	Inch	mm
L	0.126 ± 0.008	3.20 ± 0.20
W	0.063 ± 0.008	1.60 ± 0.20
T	0.038 ± 0.008	0.97 ± 0.20
B	0.020 ± 0.010	0.51 ± 0.25

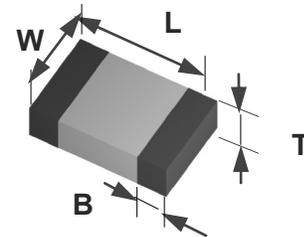


#### Ordering Information:

Part Number	Current Rating (A)	Voltage Rating (VDC)	Interrupting Ratings	Nominal Cold DCR(Ω) <sup>1</sup>	Nominal I <sup>2</sup> t (A <sup>2</sup> s) <sup>2</sup>	Marking (Optional) <sup>3</sup>
F1206HA10V024T	10	24	100 A at rated voltage	0.010	9	Q
F1206HA12V024T	12	24		0.008	14	X
F1206HA15V024T	15	24		0.005	26	Y
F1206HA20V024T	20	24		0.003	56	Z

1. Measured at ≤ 10% rated current and 25°C ambient.
2. Melting I<sup>2</sup>t at 0.001 second pre-arcing time.
3. Black Marking Character Code.

**SolidMatrix® Surface Mount Fuses**  
**HA Series (High Current), 1206 Size**


**Average Pre-arcing Time Curves:**

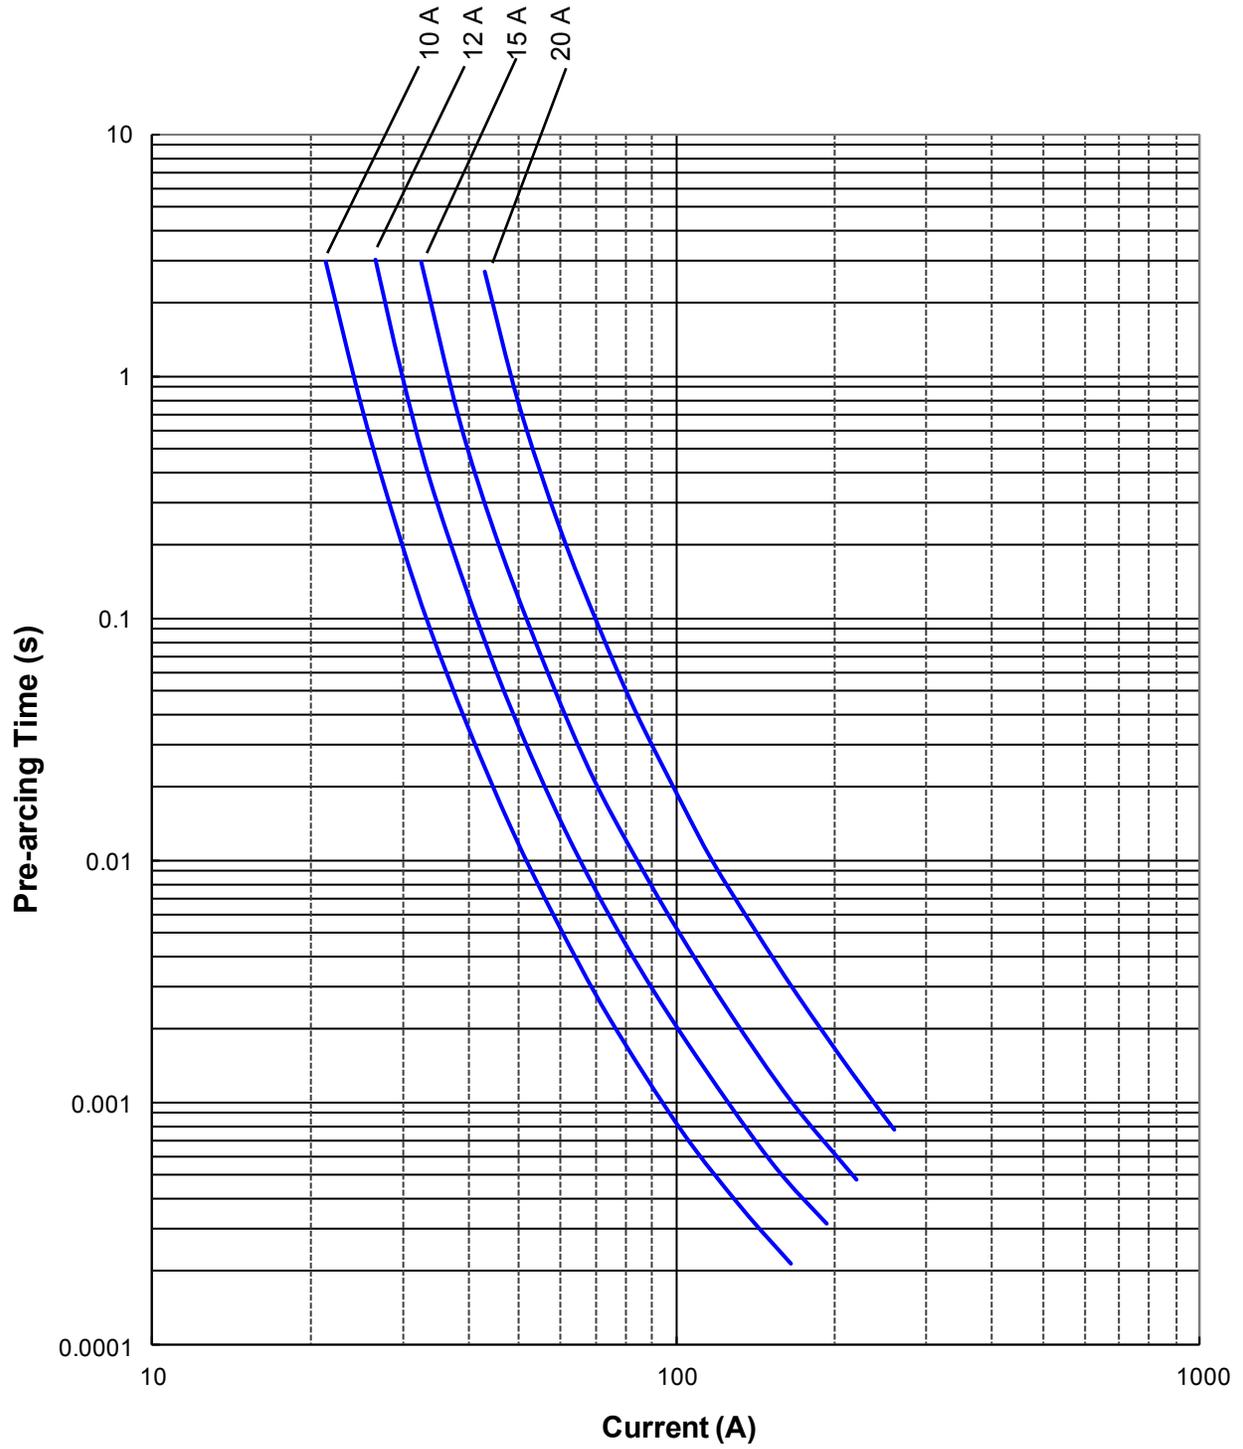

# SolidMatrix<sup>®</sup> Surface Mount Fuses

## HA Series (High Current), 1206 Size

### Average $I^2t$ vs. $t$ Curves:

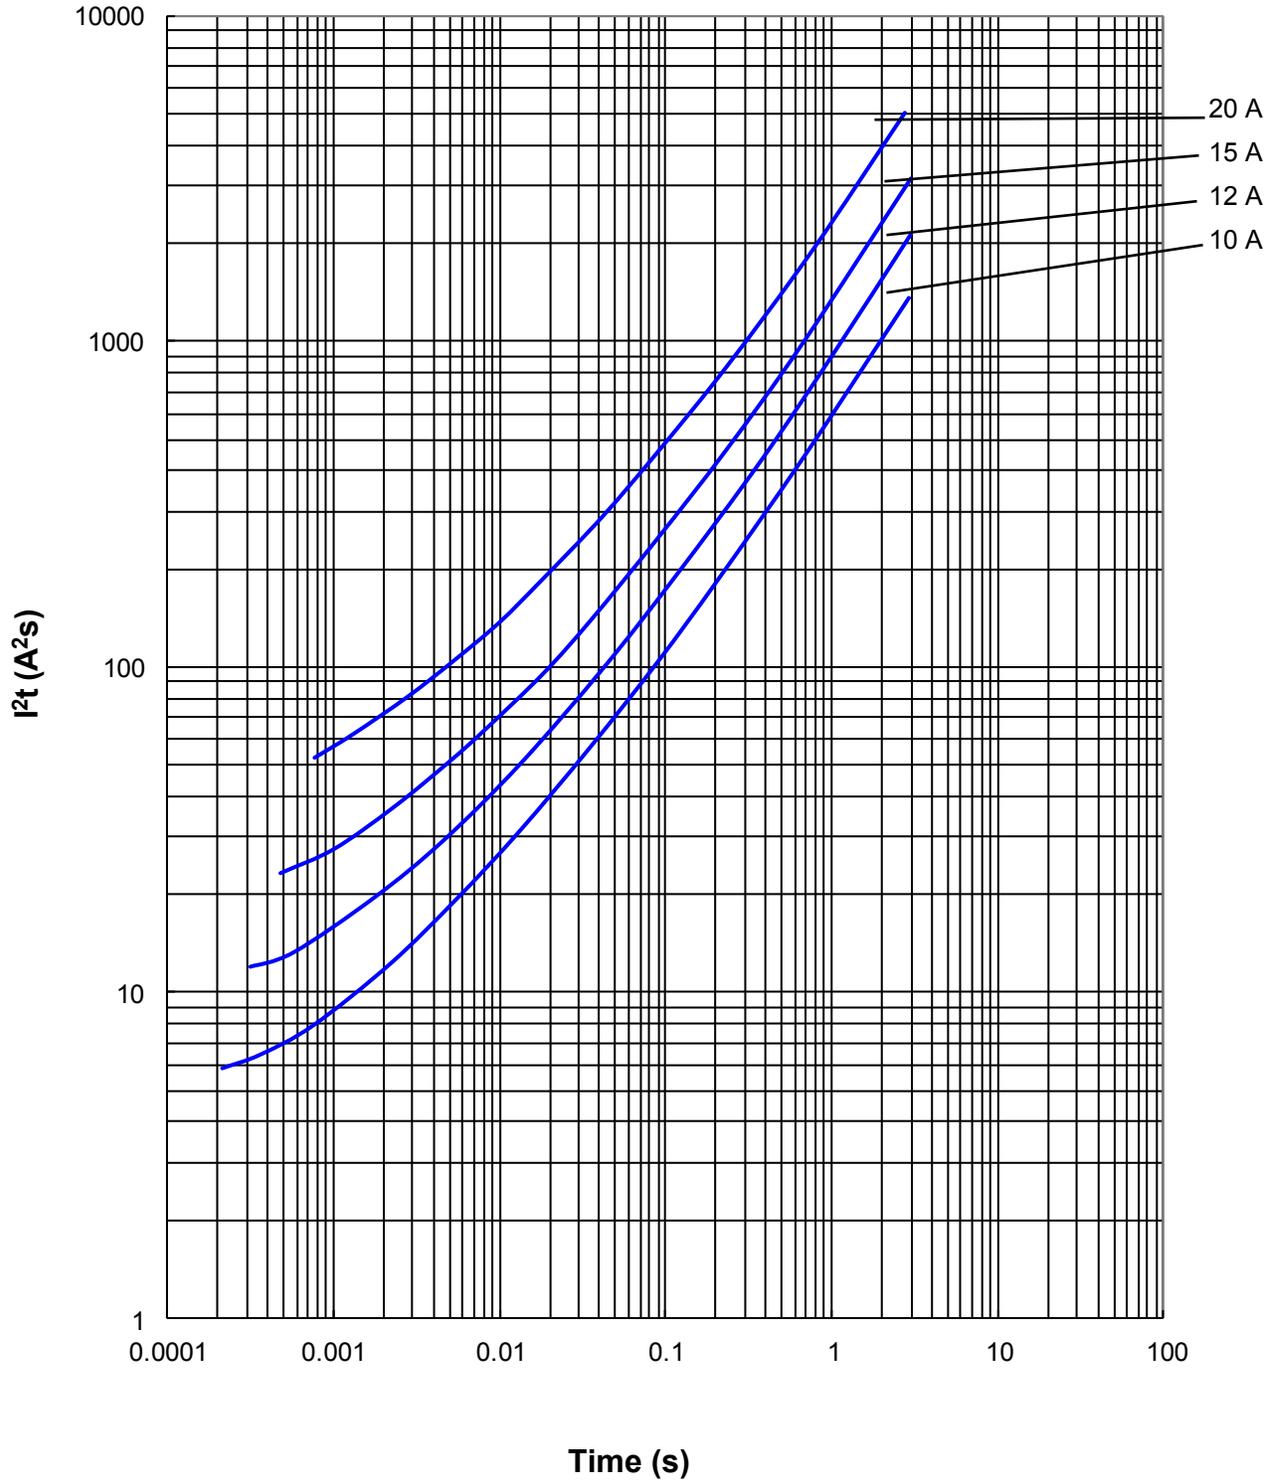

## SolidMatrix® Surface Mount Fuses

### HB Series (High Current), 1206 Size



#### Features:

- Special products for high current rating applications
- Higher current ratings and excellent inrush current withstanding capability (high  $I^2t$ )
- Glass ceramic monolithic structure
- Silver fusing element and silver termination with nickel and tin plating
- Superior arc suppression capability
- Symmetrical design with marking on both sides (optional)
- Operating temperature range:  $-55^{\circ}\text{C}$  to  $125^{\circ}\text{C}$  (with de-rating)

#### Clearing Time Characteristics:

% of current rating	Clearing time at $25^{\circ}\text{C}$
100%	4 hours min.
350%	5 seconds max.

#### Agency Approval:


Recognized Under the Components Program of UL.  
File Number: E232989.

#### Patents:

Patent numbers "US6,034,589", "US6,602,766", "US6,844,278", "ZL00134544.3", "ZL02114719.1", "ZL201020551360.8", "ZL201010299185.2", "ZL201220030614.0", "ZL201210020693.1".

#### Shape and Dimensions:

Unit	Inch	mm
L	$0.126 \pm 0.008$	$3.20 \pm 0.20$
W	$0.063 \pm 0.008$	$1.60 \pm 0.20$
T	$0.038 \pm 0.008$	$0.97 \pm 0.20$
B	$0.020 \pm 0.010$	$0.51 \pm 0.25$

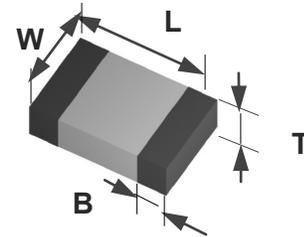


#### Ordering Information:

Part Number	Current Rating (A)	Voltage Rating (VDC)	Interrupting Ratings	Nominal Cold DCR( $\Omega$ ) <sup>1</sup>	Nominal $I^2t$ ( $\text{A}^2\text{s}$ ) <sup>2</sup>	Marking (Optional) <sup>3</sup>
F1206HB10V024T	10	24	150 A at rated voltage	0.0045	12	Q
F1206HB12V024T	12	24		0.0039	19	X
F1206HB15V024T	15	24	200 A at rated voltage	0.0031	34	Y
F1206HB20V024T	20	24		0.0020	64	Z
F1206HB25V024T	25	24	250 A at rated voltage	0.0016	187	S
F1206HB30V024T	30	24	300 A at rated voltage	0.0012	270	V

1. Measured at  $\leq 10\%$  rated current and  $25^{\circ}\text{C}$  ambient.  
2. Melting  $I^2t$  at 1000% of current rating.  
3. Red Marking Character Code.


**SolidMatrix® Surface Mount Fuses**  
**HB Series (High Current), 1206 Size**

**Average Pre-arcing Time Curves:**

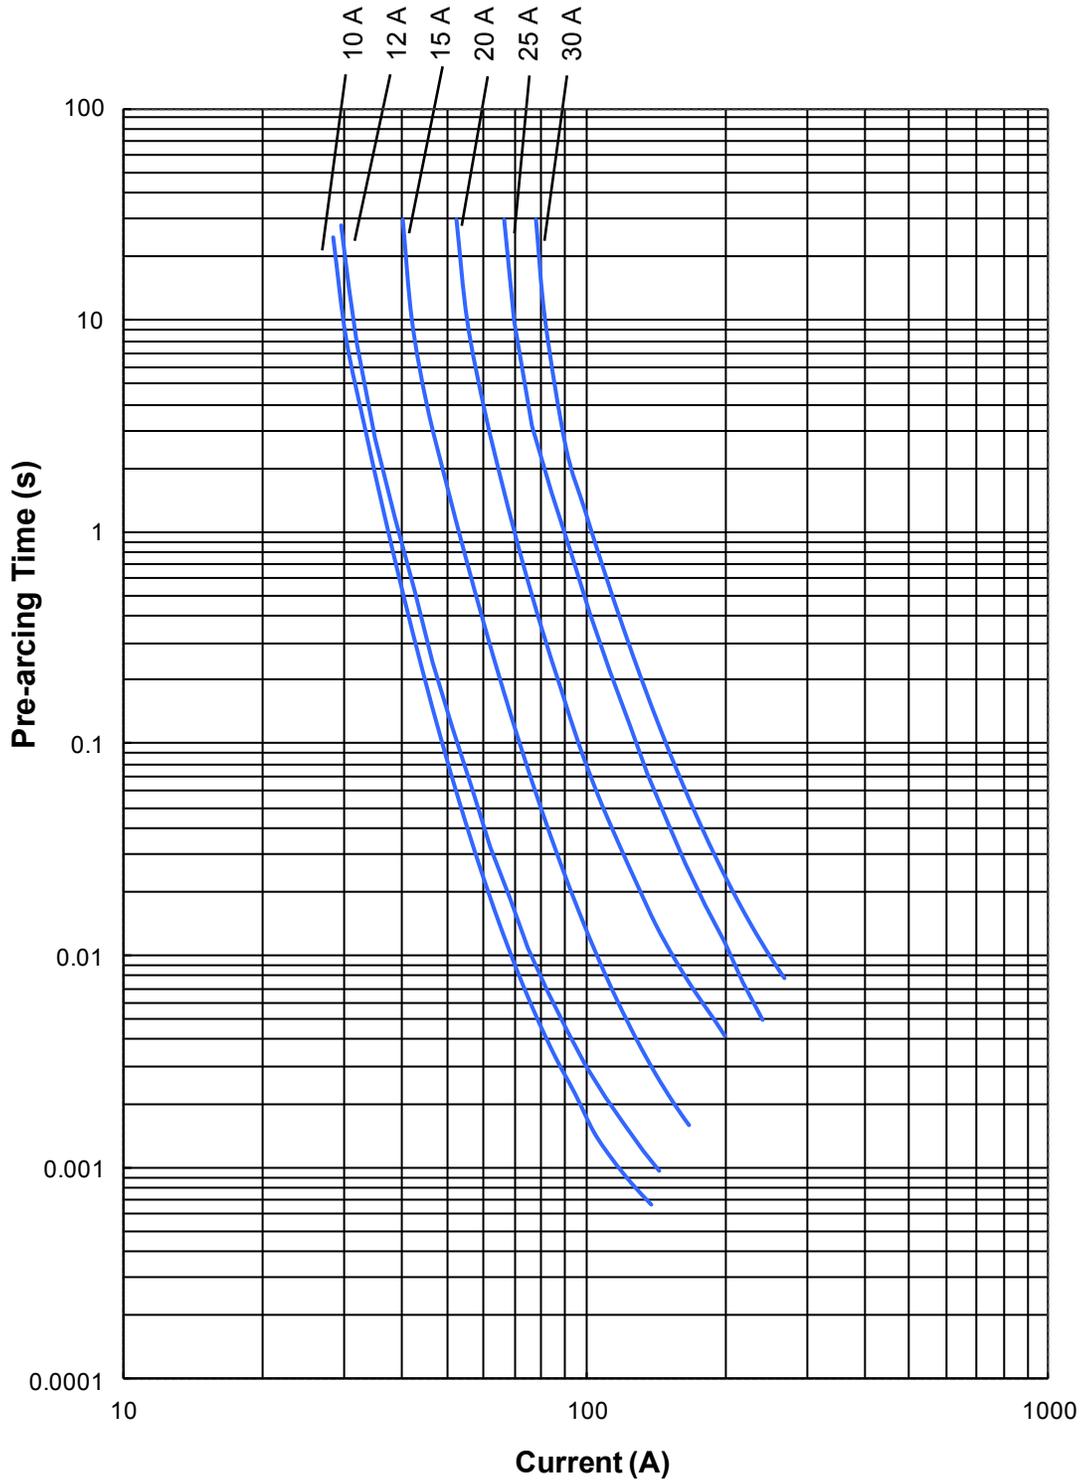


# SolidMatrix<sup>®</sup> Surface Mount Fuses HB Series (High Current), 1206 Size

## Average $I^2t$ vs. $t$ Curves:

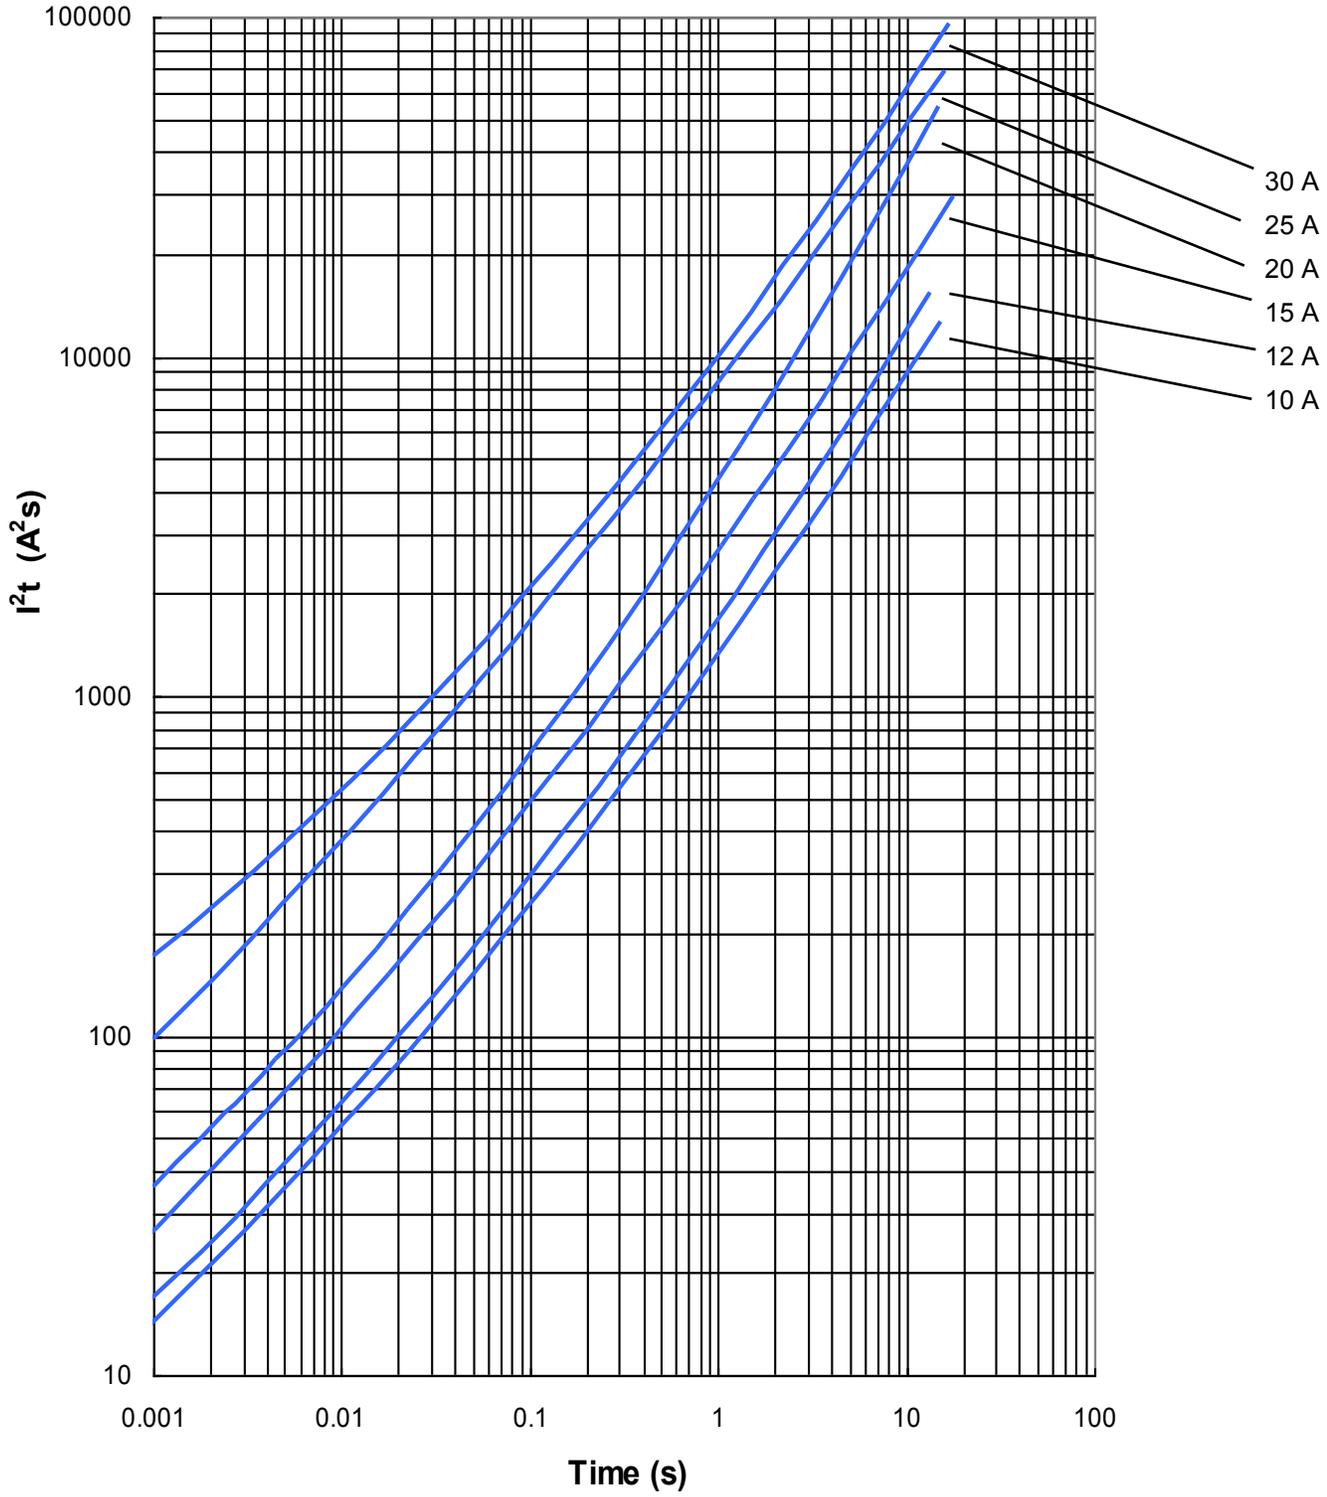

## SolidMatrix® Surface Mount Fuses

### FF Series (Very Fast Acting), 0603 Size

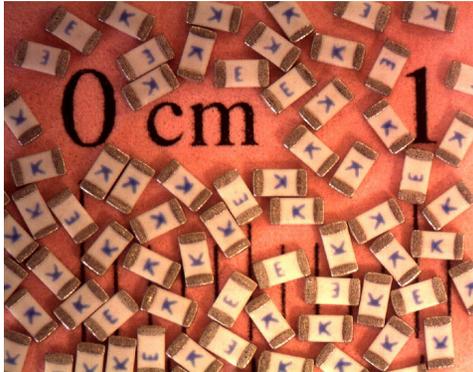

#### Features:

- Very fast acting at 200% and 300% overloads
- Excellent inrush current withstanding capability at high overloads
- Thin body for space limiting applications
- Glass ceramic monolithic structure
- Silver fusing element and silver termination with nickel and tin plating
- Symmetrical design with marking on both sides (optional)
- Operating temperature range: -55°C to 125°C (with de-rating)

#### Clearing Time Characteristics:

% of Current Rating	Clearing Time at 25°C	
	100%	4 hours min.
200%	0.01 seconds min.	5 seconds max.
300%	0.001 seconds min.	0.2 seconds max.

#### Agency Approval:


Recognized Under the Components Program of UL.  
File Number: E232989.

#### Patents:

Patent numbers "US6,034,589", "US6,602,766", "US6,844,278", "ZL00134544.3", "ZL02114719.1", "ZL201020551360.8", "ZL201010299185.2", "ZL201220030614.0", "ZL201210020693.1".

#### Shape and Dimensions:

Unit	Inch	mm
L	0.063 ± 0.006	1.60 ± 0.15
W	0.031 ± 0.006	0.80 ± 0.15
T	0.012 + 0.007 / -0.003	0.30 + 0.18 / -0.08
B	0.014 ± 0.006	0.36 ± 0.15

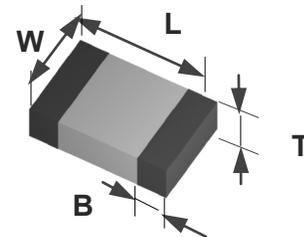

#### Ordering Information:

Part Number	Current Rating(A)	Voltage Rating (VDC)	Interrupting Ratings	Nominal Cold DCR(Ω) <sup>1</sup>	Nominal I <sup>2</sup> t (A <sup>2</sup> s) <sup>2</sup>	Marking (Optional) <sup>3</sup>
F0603FF0500V032T	0.5	32	50 A at rated voltage	1.000	0.0093	C
F0603FF0750V032T	0.75	32		0.450	0.0191	D
F0603FF1000V032T	1.0	32		0.280	0.036	E
F0603FF1250V032T	1.25	32	35 A at rated voltage	0.205	0.063	F
F0603FF1500V032T	1.5	32		0.143	0.095	G
F0603FF1750V032T	1.75	32		0.095	0.14	H
F0603FF2000V032T	2.0	32		0.073	0.21	I
F0603FF2500V032T	2.5	32		0.046	0.30	J
F0603FF3000V032T	3.0	32		0.039	0.46	K
F0603FF3500V032T	3.5	32		0.028	0.73	L
F0603FF4000V032T	4.0	32		0.023	1.15	M
F0603FF4500V032T	4.5	32		0.019	1.68	T
F0603FF5000V032T	5.0	32	0.015	2.62	N	

1. Measured at ≤ 10% rated current and 25°C ambient.


2. Melting I<sup>2</sup>t at 0.001 second pre-arcing time.

3. Blue Marking Character Code.

# SolidMatrix<sup>®</sup> Surface Mount Fuses

## FF Series (Very Fast Acting), 0603 Size


### Average Pre-arcing Time Curves:

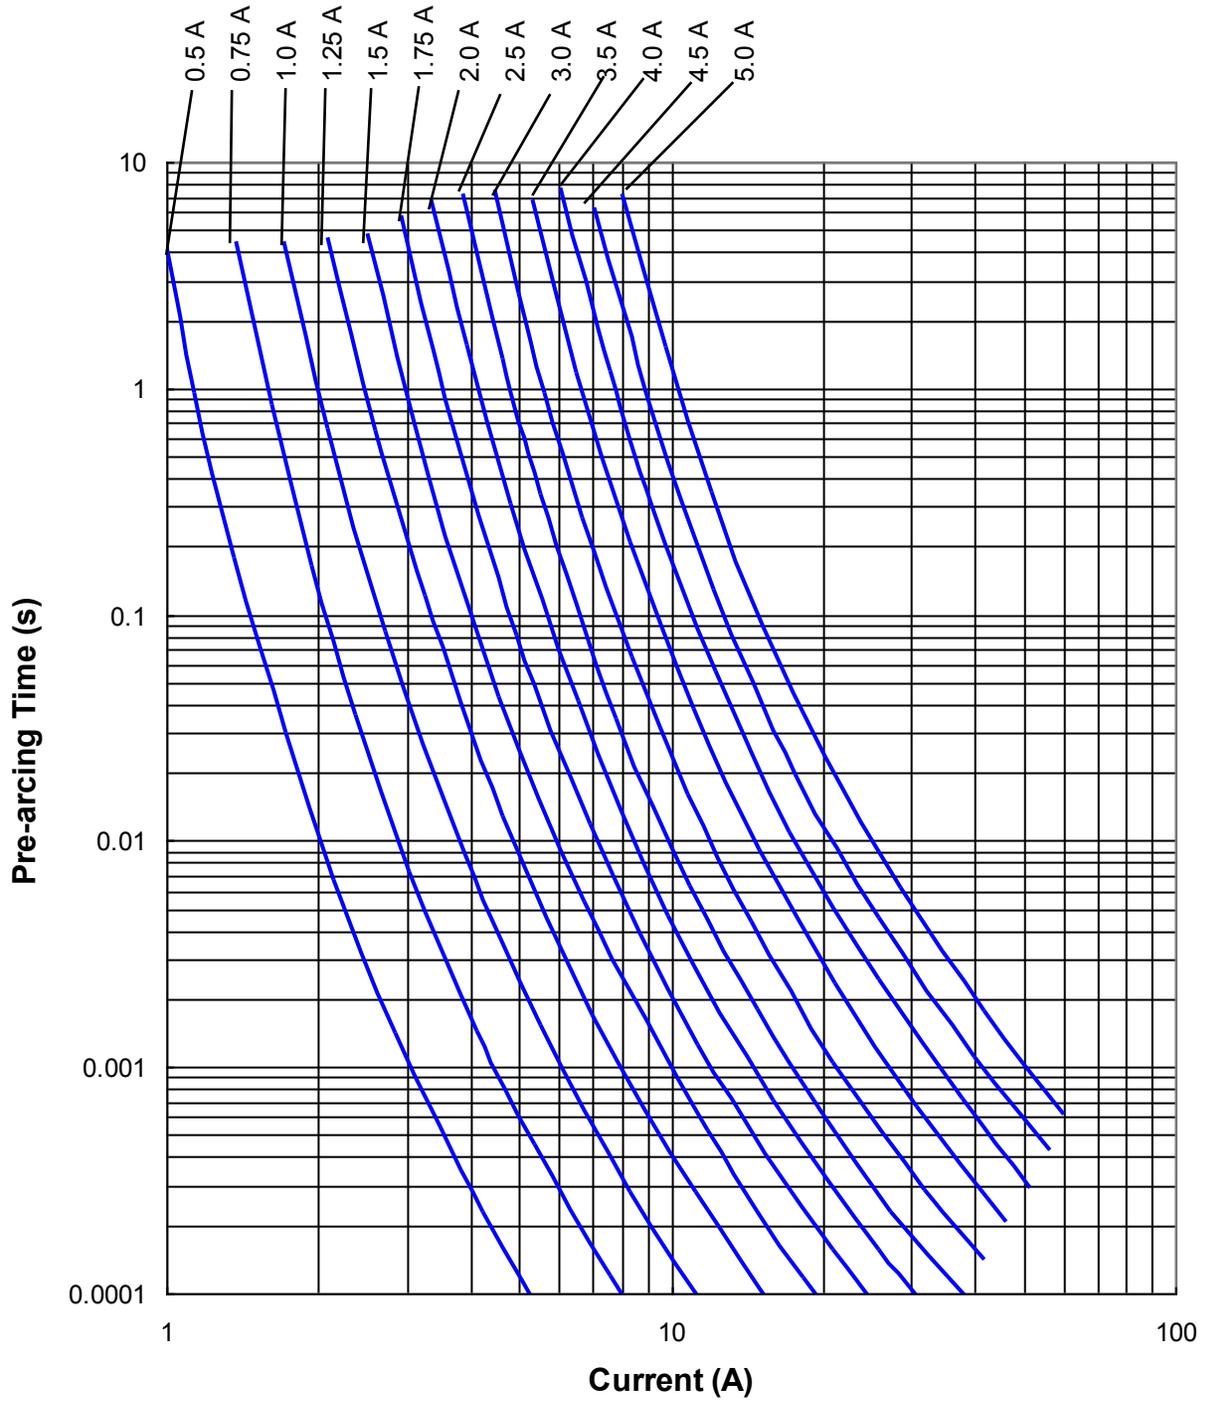

# SolidMatrix<sup>®</sup> Surface Mount Fuses

## FF Series (Very Fast Acting), 0603 Size

### Average $I^2t$ vs. $t$ Curves:

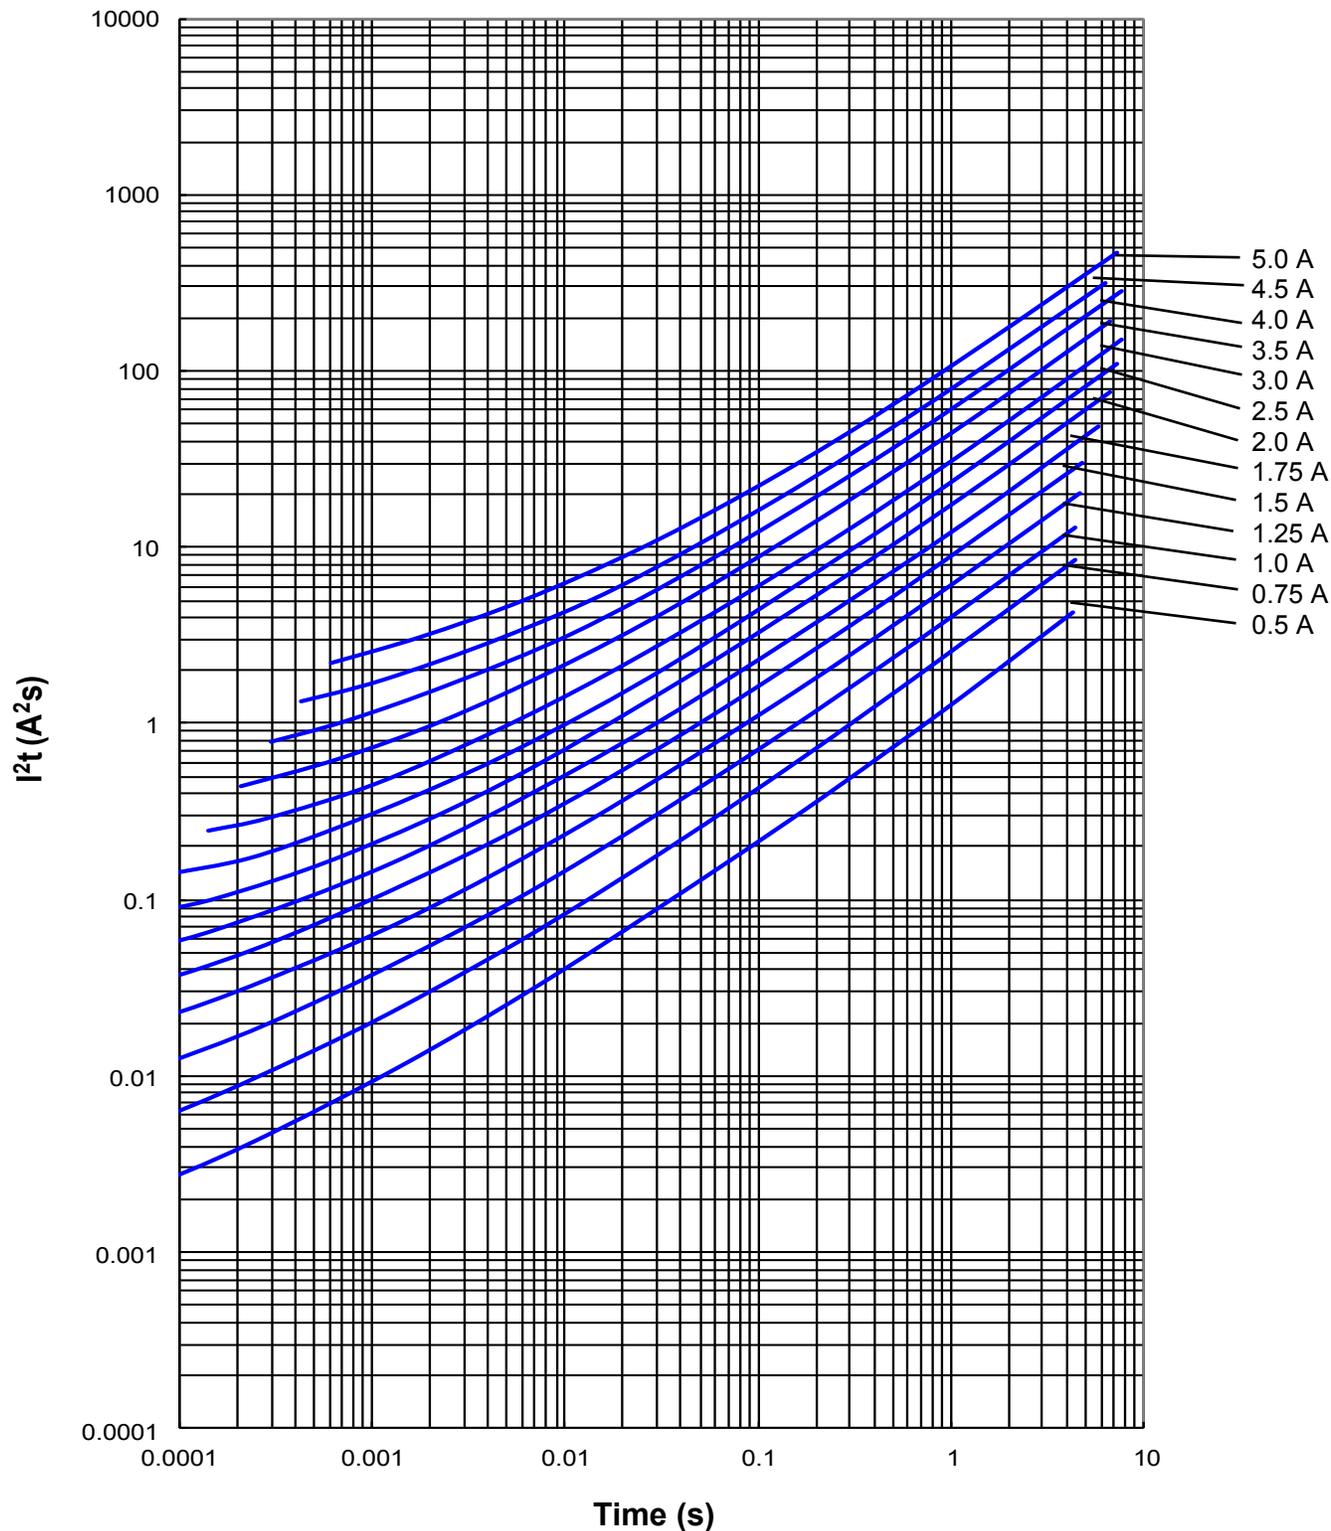


## SolidMatrix® Surface Mount Fuses

### Product Identification:

**F 0603 FA 1000 V032 T M**  
 (1) (2) (3) (4) (5) (6) (7)

- (1) **Product code:** F—Chip Fuse
- (2) **Size code:** Standard EIA Chip Sizes
- (3) **Series code:** FA —FA Series; SB —SB Series; HI —HI Series; FF—FF Series; HA/HB—HA/HB Series
- (4) **Current rating code:** 1000 — 1000 mA ( For HA, HB, 10—10 A)
- (5) **Voltage rating code:** V032 — 32 VDC
- (6) **Package code:** T — Tape & Reel, B — Bulk
- (7) **Marking code:** M—With Marking (Optional)

### Recommended Land Pattern:

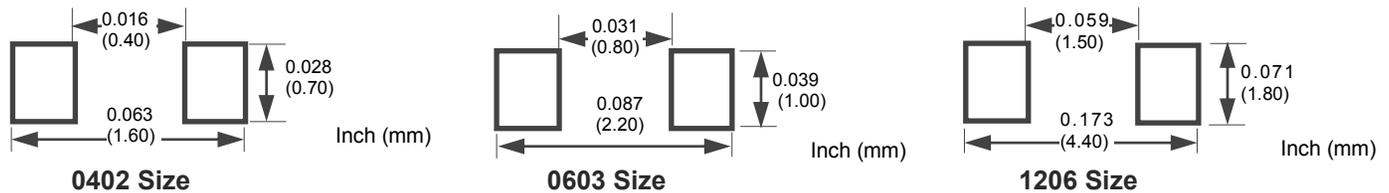

### Environmental Tests:

No.	Test	Requirement	Test condition	Test reference
1	Soldering heat resistance	DCR change $\leq \pm 10\%$ No mechanical damage	One dip at 260°C for 60 seconds	MIL-STD-202 Method 210
2	Solderability	Minimum 95% coverage	One dip at 255°C for 5 seconds	MIL-STD-202 Method 208
3	Thermal shock	DCR change $\leq \pm 10\%$ No mechanical damage	100 cycles between -65°C and +125°C	MIL-STD-202 Method 107
4	Moisture resistance	DCR change $\leq \pm 15\%$ No excessive corrosion	10 cycles	MIL-STD-202 Method 106
5	Salt spray	DCR change $\leq \pm 10\%$ No excessive corrosion	48 hour exposure	MIL-STD-202 Method 101
6	Mechanical vibration	DCR change $\leq \pm 10\%$ No mechanical damage	0.4" D.A. or 30 G between 5 – 3000 Hz	MIL-STD-202 Method 204
7	Mechanical shock	DCR change $\leq \pm 10\%$ No mechanical damage	1500 G, 0.5 ms, half-sine shocks	MIL-STD-202 Method 213
8	Terminal strength	No mechanical damage	30 second hanging for 1206 (1.5 kg) and 0603 (0.5 kg), 0.5 Kg pushing for 0402	Refer to AEM QIQ007
9	Life	No electrical "opens" during testing voltage drop change shall be less than $\pm 20\%$ of initial value	80% rated current (75% for < 1 A fuses) for 2000 hours at ambient temperature between +20°C and +30°C	Refer to AEM QIQ106

### Electrical Specification:

#### Clearing Time Characteristics:

Same as specified on the Short Form Data Sheet

#### Insulation Resistance after Opening:

20,000 ohms typical when cleared with rated voltage applied. Fuse clearing under low voltage conditions may result in lower after clearing insulation resistance values. (Note: Under normal fault conditions (low or rated voltage conditions), AEM SolidMatrix fuses provide sufficient after clearing insulation resistance values for circuit protection.)

#### Current Carrying Capacity:

100% rated current at +25°C ambient for 4 hours minimum when evaluated per MIL-PRF-23419

#### Interrupt Ratings:

as specified in this catalog.

## SolidMatrix® Surface Mount Fuses

### Fuse Selection and Temperature De-rating Guideline:

The ambient temperature affects the current carrying capacity of fuses. When a fuse is operating at a temperature higher than 25°C, the fuse shall be “de-rated”.

To select a fuse from the catalog, the following rule may be followed:

Catalog Fuse Current Rating = Nominal Operating Current / 0.75 / % De-rating at the maximum operating temperature.

Example: At maximum operating temperature of 65°C, % De-rating is 90%. The nominal operating current is 4 A. The current rating for fuse selected from the catalog shall be:  $4 / 0.75 / 90\% = 5.9$  or 6 A. Specifications and descriptions in this literature are as accurate as known at the time of publish, but are subject to change without notice.


Temperature Effect on Current Rating



Maximum Operating Temperature (°C)

### Soldering Temperature Profile:

\* Recommended Temperature Profile for Reflow Soldering

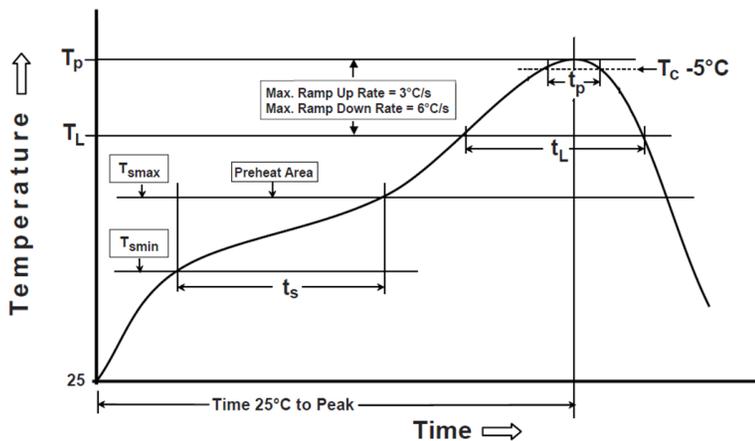


Profile Feature	Pb-Free Assembly
<b>Preheat/Soak</b> Temperature Min ( $T_{smin}$ ) Temperature Max ( $T_{smax}$ ) Time ( $t_s$ ) from ( $T_{smin}$ to $T_{smax}$ )	150°C 200°C 60~120 seconds
Ramp-up rate ( $T_L$ to $T_p$ )	3°C/second max.
Liquidous temperature ( $T_L$ ) Time ( $t_L$ ) maintained above $T_L$	217°C 60~150 seconds
Peak package body temperature ( $T_p$ )	260°C
Time ( $t_p$ )* within 5°C of the specified classification temperature ( $T_c$ )	30 seconds *
Ramp-down rate ( $T_p$ to $T_L$ )	6°C/second max.
Time 25°C to peak temperature	8 minutes max.

\* Tolerance for peak profile temperature ( $T_p$ ) is defined as a supplier minimum and a user maximum

\* Recommended Temperature Profile for Wave Soldering

Recommended Temperature Profile for Wave Soldering

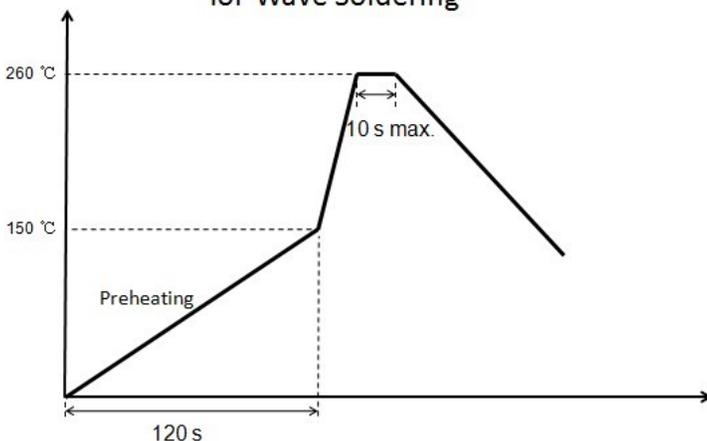

### Packaging:

Chip Size	Parts on 7 inch (178 mm) Reel
0402 (1005)	10,000
0603 (1608)	4,000
0603FF (1608)	6,000
1206 (3216)	3,000

Notice: Wave Soldering is suitable for 1206 and 0603 size.

## TF-FUSE<sup>®</sup> Thin Film Surface Mount Fuses

### FF Series, 0603 Size



#### Features:

- Very fast acting at 200% overload current levels
- Low DCR
- High inrush current withstanding capability
- Fiberglass enforced epoxy fuse body
- Copper termination with nickel and tin plating
- Halogen free, RoHS compliance and lead-free

#### Applications:


- Notebook computers and tablets
- Digital cameras
- Memory cards
- Toys
- Bluetooth earphones
- Portable electronic devices

#### Shape and Dimensions:

Unit	Inch	mm
Length (L)	0.063 ± 0.004	1.60 ± 0.10
Width (W)	0.032 ± 0.004	0.81 ± 0.10
Thickness (T)	0.012 ± 0.004	0.30 ± 0.10
Termination bandwidth (b)	0.014 ± 0.004	0.36 ± 0.10

#### Clearing Time Characteristics:

% of Current Rating	Opening Time at 25°C
100%	4 hours min.
200%	5 seconds max.
300%	0.2 second max.

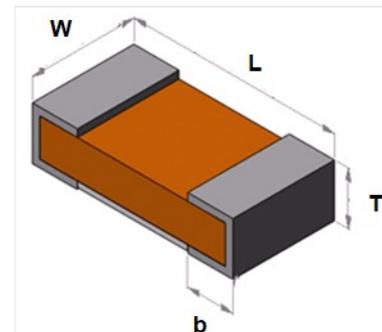

#### Agency Approval:

Recognized Under the Components Program of UL.  
File Number: E232989.

#### Product Identification:

**T 0603 FF 1000 T M**

(1) (2) (3) (4) (5) (6)

(1) **Product code**

(2) **Size code:** Standard EIA chip sizes

(3) **Series code:**

FF: FF series

(4) **Current rating code:**

0500: 0.5A

1000: 1.0A

(5) **Package code:**

T: Tape & Reel

(6) **Marking code:**

M: With mark (option)

## TF-FUSE<sup>®</sup> Thin Film Surface Mount Fuses

### FF Series, 0603 Size

#### Typical Ratings and Characteristics:

Operating temperature: -55 to +90°C


Part Number	Current Rating (A)	Voltage Rating (VDC)	Interrupting Rating	Nominal Cold DCR ( $\Omega$ ) <sup>1</sup>	Nominal $I^2t$ ( $A^2s$ ) <sup>2</sup>	Marking
T0603FF0150TM	0.150	65	50A@35V DC/AC 13A@65V DC	2.200	0.0006	
T0603FF0200TM	0.200	65		1.300	0.0014	
T0603FF0250TM	0.250	65		1.100	0.0016	
T0603FF0375TM	0.375	65		0.480	0.0040	
T0603FF0500TM	0.50	65		0.185	0.0120	
T0603FF0750TM	0.75	65		0.112	0.0210	
T0603FF1000TM	1.00	65		0.069	0.0420	
T0603FF1250TM	1.25	65	35A@35V DC/AC 13A@65V DC	0.048	0.0520	
T0603FF1500TM	1.50	65		0.037	0.0710	
T0603FF1750TM	1.75	35	35A@35V DC/AC 50A@24V DC/AC	0.031	0.1000	
T0603FF2000TM	2.00	35		0.0260	0.1400	
T0603FF2500TM	2.50	35		0.0210	0.2400	
T0603FF3000TM	3.00	35		0.0176	0.3300	
T0603FF3500TM	3.50	35		0.0148	0.4900	
T0603FF4000TM	4.00	35		0.0125	0.6300	
T0603FF5000TM	5.00	35		0.0095	1.1000	

<sup>1</sup> Measured at  $\leq 10\%$  of rated current and 25°C ambient .

<sup>2</sup> Melting  $I^2t$  at 0.001 sec.


**TF-FUSE® Thin Film Surface Mount Fuses**  
**FF Series, 0603 Size**

**Average Pre-arcing Time Curves:**

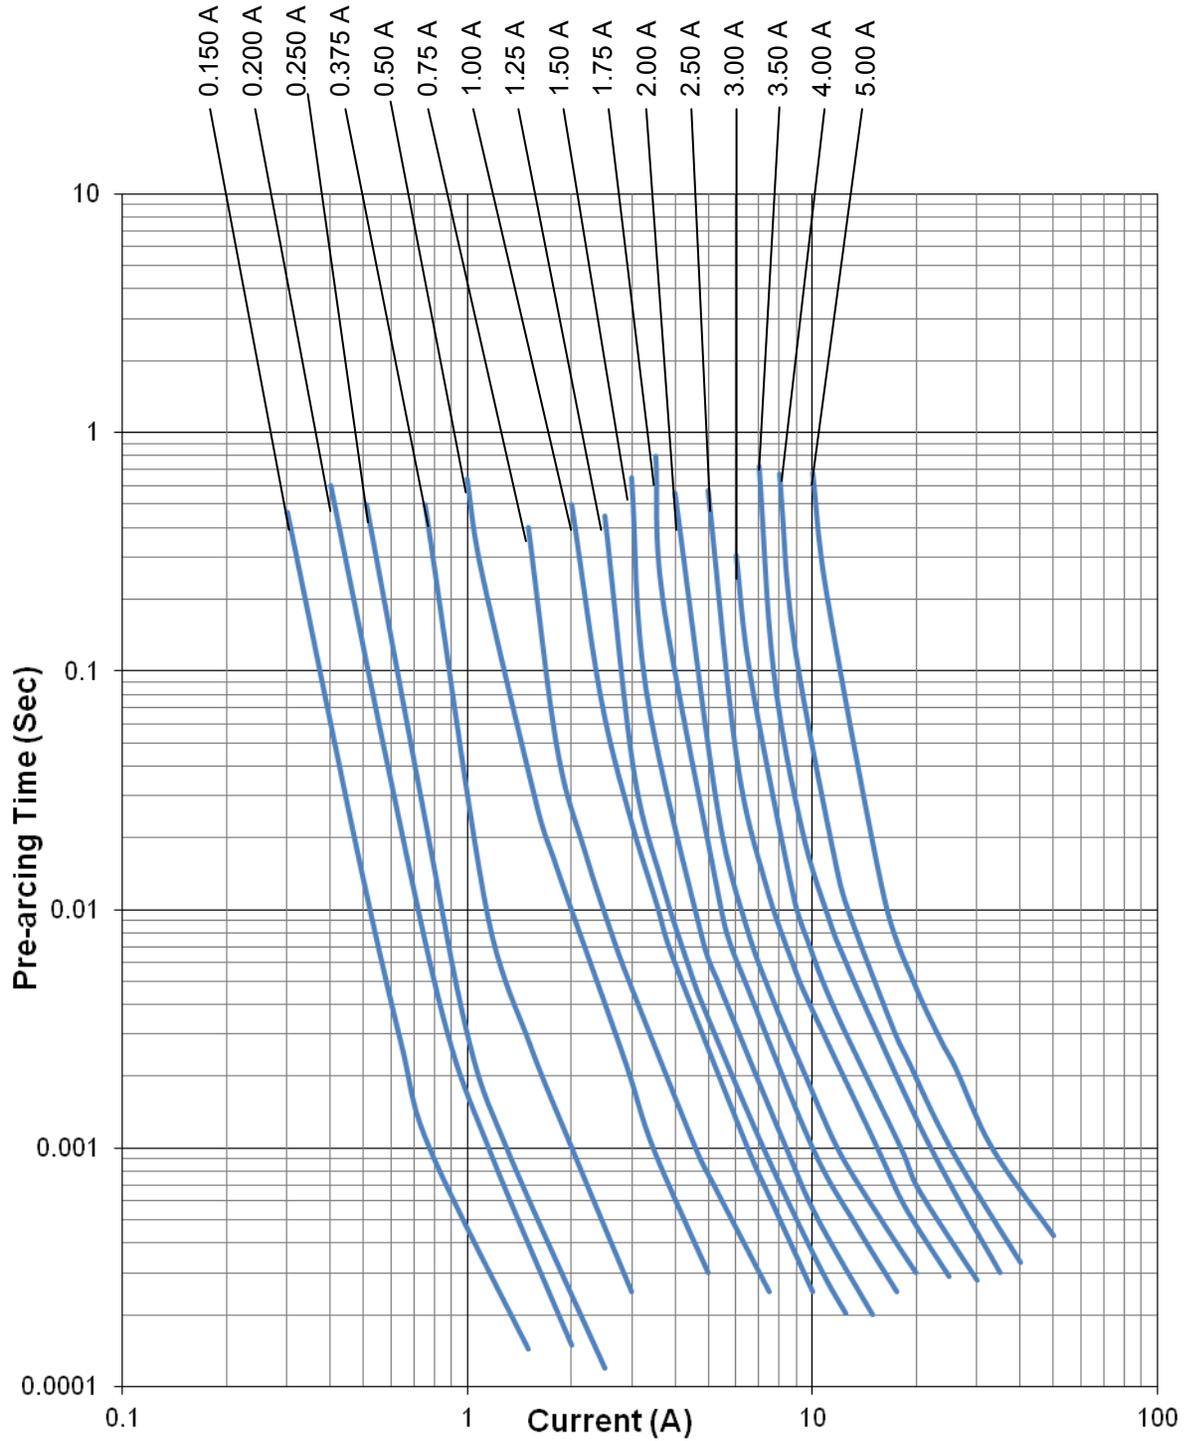


**TF-FUSE® Thin Film Surface Mount Fuses**  
**FF Series, 0603 Size**

**Average  $I^2t$  vs.  $t$  Curves:**

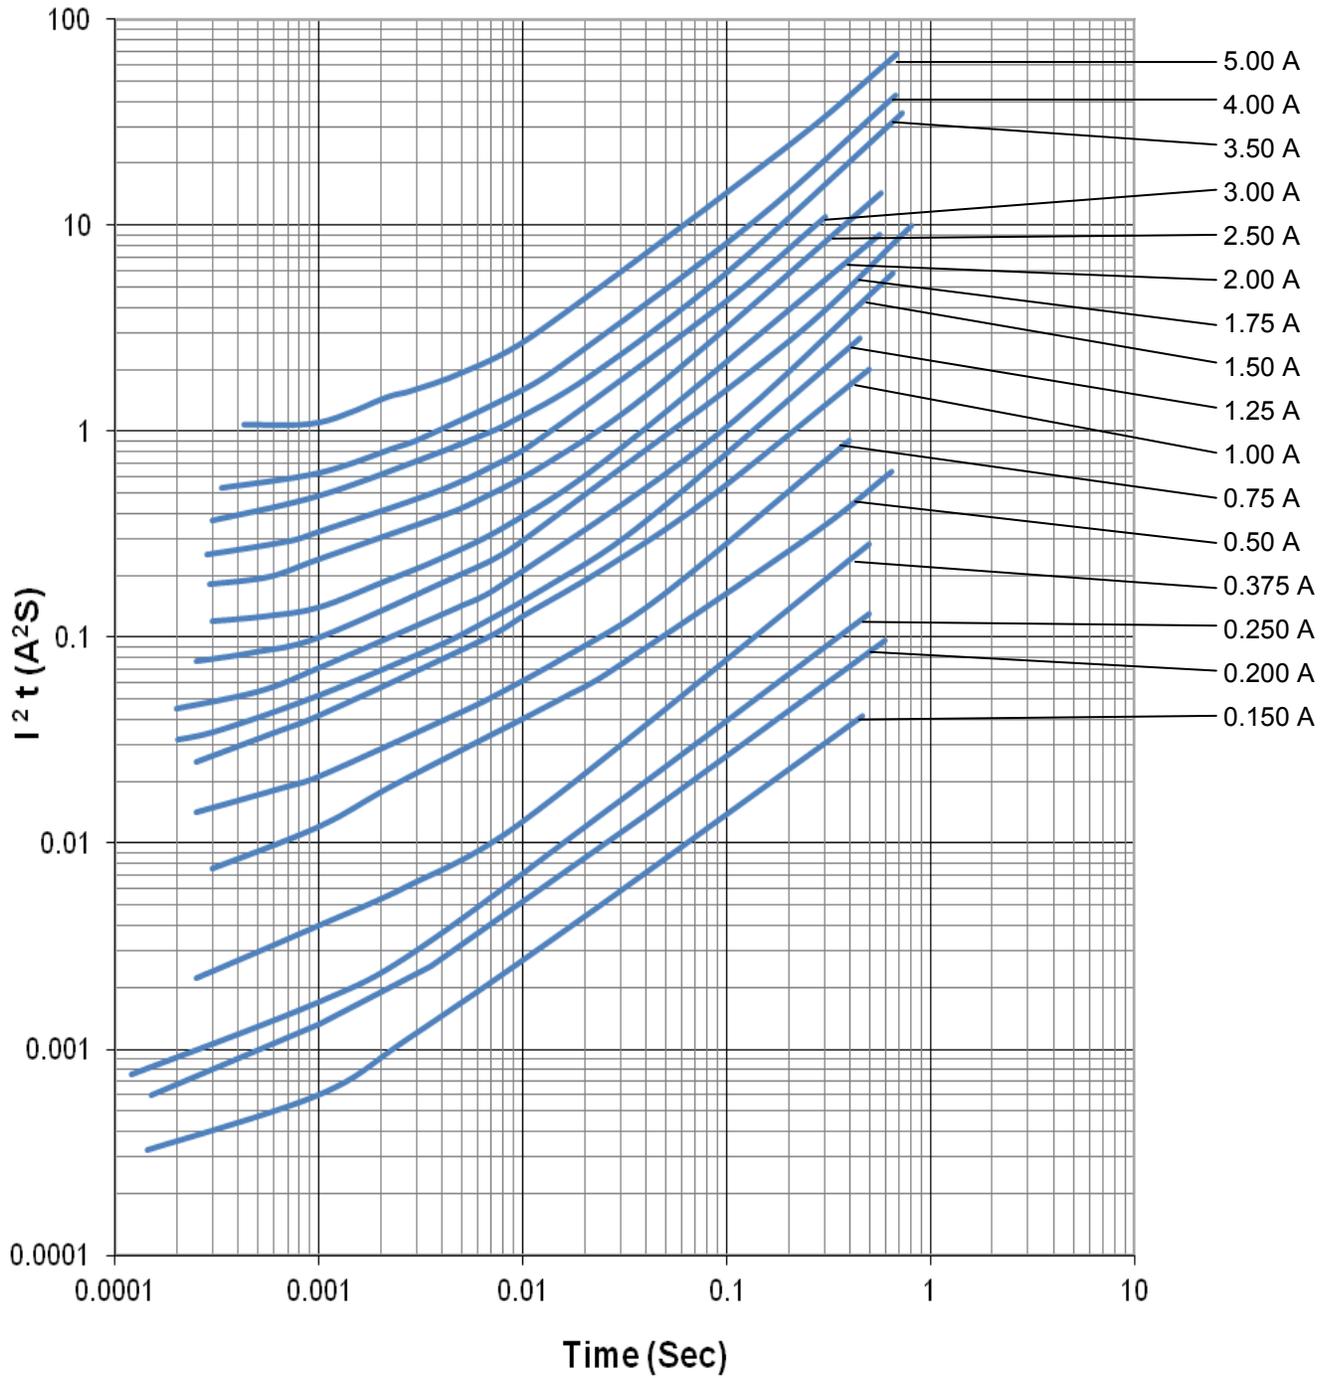

## TF-FUSE® Thin Film Surface Mount Fuses

### HI Series, 0603 Size

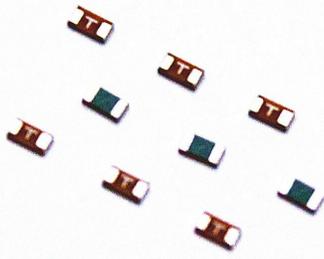

#### Applications:

- Consumer Electronics
- Notebook computers and tablets
- Telecom Devices
- Mobil Phone
- Digital cameras
- Battery Pack
- Digital Camera

#### Clearing Time Characteristics:

% of Current Rating	Opening Time at 25°C	
	100%	4 hours min.
200%	1 second min.	60 seconds max.
300%	0.0002 second min.	0.02 second max.

#### Agency Approval:

Recognized Under the Components Program of UL.  
File Number: E232989.

#### Product Identification:

**T 0603 HI 1000 T M**

(1) (2) (3) (4) (5) (6)


- (1) **Series code**
- (2) **Size code:** Standard EIA chip sizes
- (3) **Action code:** HI—High Inrush
- (4) **Current rating code:** 1000—1.0A
- (5) **Package code:** T—Tape & Reel; B—Bulk
- (6) **Marking code:** M—With white mark (optional)

#### Features:

- Low DCR
- High inrush current withstanding capability
- Fiberglass enforced epoxy fuse body
- Copper termination with nickel and tin plating
- Halogen free, RoHS compliance and lead-free

#### Shape and Dimensions:

Unit	Inch	mm
Length (L)	0.063 ± 0.004	1.60 ± 0.10
Width (W)	0.032 ± 0.004	0.81 ± 0.10
Thickness (T)	0.014 ± 0.004	0.36 ± 0.10
Termination bandwidth (b)	0.014 ± 0.004	0.36 ± 0.10

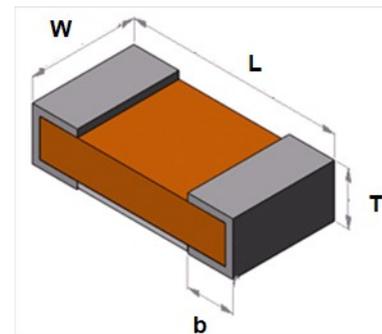

## TF-FUSE® Thin Film Surface Mount Fuses

### HI Series, 0603 Size

#### Typical Ratings and Characteristics:


Operating temperature: -55 to +90°C

Part Number	Current Rating (A)	Voltage Rating (VDC)	Interrupting Rating	Nominal Cold DCR ( $\Omega$ ) <sup>1</sup>	Nominal $I^2t$ ( $A^2s$ ) <sup>2</sup>	Marking
T0603HI0500TM	0.50	65	50A@35V DC/AC 13A@65V DC	0.1550	0.019	C
T0603HI0750TM	0.75	65		0.0830	0.036	D
T0603HI1000TM	1.00	65		0.0500	0.052	E
T0603HI1500TM	1.50	65		0.0290	0.110	T
T0603HI2000TM	2.00	35	35A@35V DC/AC 50A@24V DC/AC	0.0200	0.310	F
T0603HI2500TM	2.50	35		0.0165	0.400	J
T0603HI3000TM	3.00	35		0.0140	0.600	L
T0603HI3500TM	3.50	35		0.0120	0.800	N
T0603HI4000TM	4.00	35		0.0095	1.200	P

<sup>1</sup> Measured at  $\leq 10\%$  of rated current and 25°C ambient .


<sup>2</sup> Melting  $I^2t$  at 0.001 sec.

#### Construction and Materials:

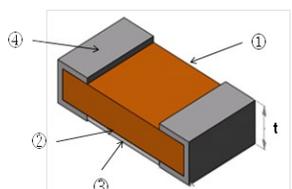	<b>Substrate</b> ①	<b>Fuse element</b> ②	<b>Overcoat</b> ③	<b>Termination</b> ④
	PCB	Cu/Sn	Epoxy	Cu/Ni/Sn


**TF-FUSE® Thin Film Surface Mount Fuses**  
**HI Series, 0603 Size**

**Average Pre-arcing Time Curves:**

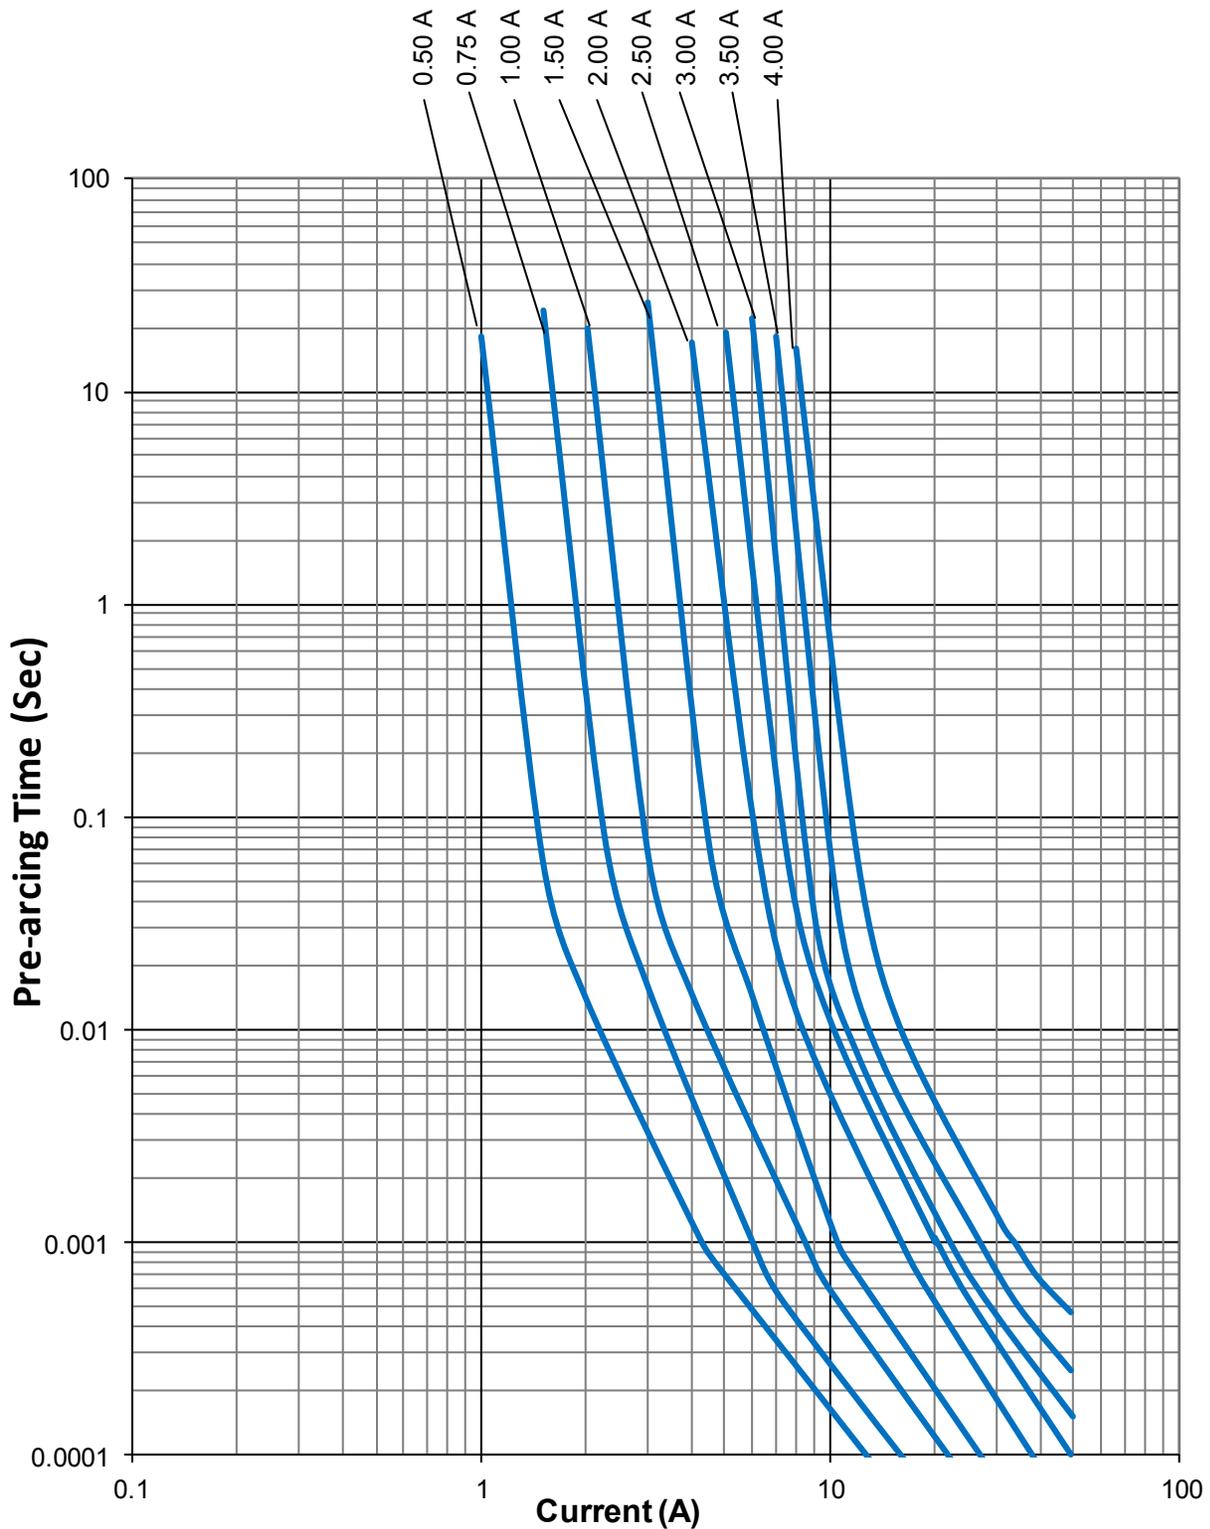


**TF-FUSE® Thin Film Surface Mount Fuses**  
**HI Series, 0603 Size**

**Average  $I^2t$  vs.  $t$  Curves:**

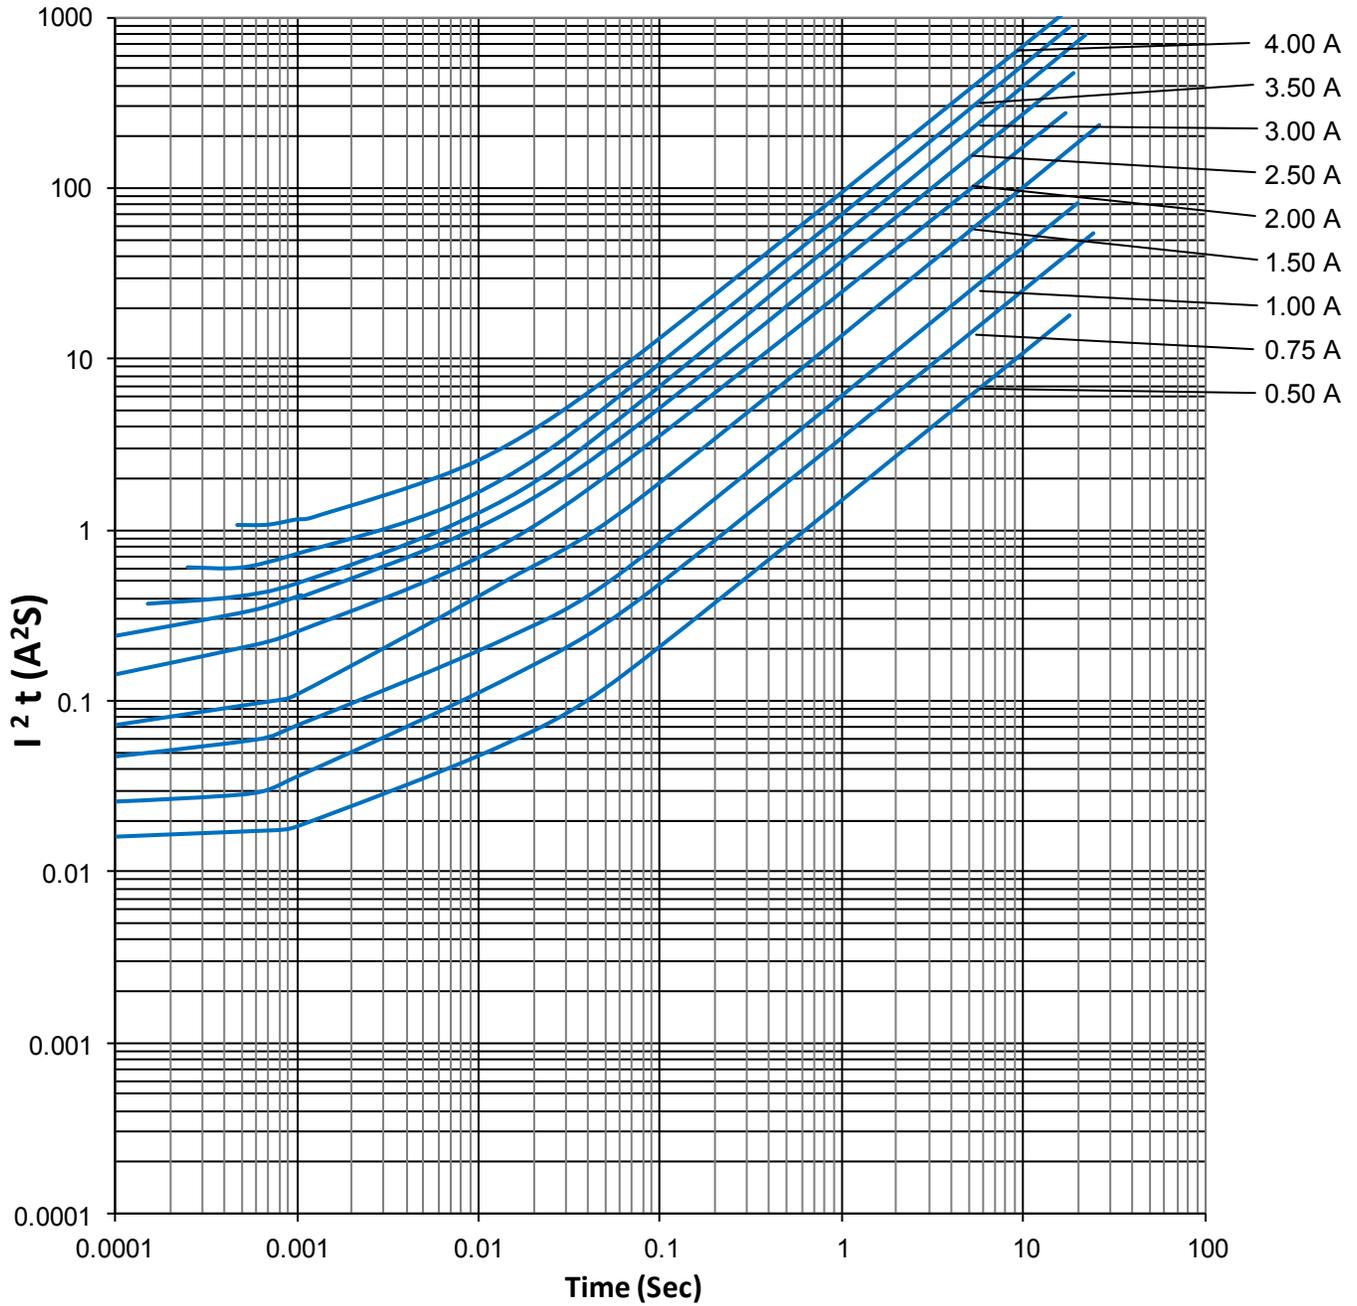

## TF-FUSE® Thin Film Surface Mount Fuses

### Temperature Effect on Current Rating:

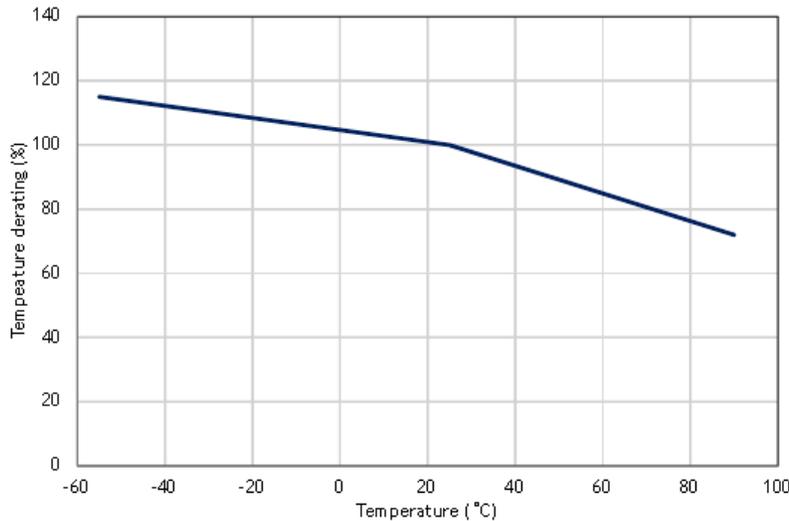

### Environmental Tests:

No.	Test item	Requirement	Test condition	Reference
1	Bending	≤1A: 10% DCR change max. >1A: 20% DCR change max.	2mm	Refer to AEM QIQ034
2	Solderability	95% coverage min.	One dip at 255°C for 5 seconds	MIL-STD-202 Method 208
3	Thermal shock	DCR change within ±10% No mechanical damage	100 cycles between -55°C and +125°C	MIL-STD-202 Method 107
4	Moisture resistance	DCR change within ±10% No excessive corrosion	10 cycles	MIL-STD-202 Method 106
5	Salt spray	DCR change within ≤ ±10% No excessive corrosion	5% salt solution, 48 hour exposure	MIL-STD-202 Method 101
6	Mechanical vibration	DCR change within ≤ ±10% No mechanical damage	0.4" D.A. or 30G between 5 and 3000 Hz	MIL-STD-202 Method 204
7	Mechanical shock	DCR change within ≤ ±10% No mechanical damage	1500G, 0.5 ms, half sine shocks	MIL-STD-202 Method 213
8	Life	Change of voltage drop within ±10%, no open circuit	75% rated current, 2000 hours, ambient temperature +20°C to 30°C	Refer to AEM QIQ106


## TF-FUSE® Thin Film Surface Mount Fuses

### Packaging:

Chip Size	Parts on 7 inch (178mm) Reel
0603(1608)	8,000

### Recommended Reflow Soldering Profile:

Profile Feature	Pb-Free Assembly
<b>Preheat/Soak</b> Temperature Min ( $T_{smin}$ ) Temperature Max ( $T_{smax}$ ) Time ( $t_s$ ) from ( $T_{smin}$ to $T_{smax}$ )	150°C 200°C 60~120 seconds
Ramp-up rate ( $T_L$ to $T_p$ )	3°C/second max.
Liquidous temperature ( $T_L$ ) Time ( $t_L$ ) maintained above $T_L$	217°C 60~150 seconds
Peak package body temperature ( $T_p$ )	260°C
Time ( $t_p$ )*within 5°C of the specified classification temperature ( $T_c$ )	30 seconds *
Ramp-down rate ( $T_p$ to $T_L$ )	6°C/second max.
Time 25°C to peak temperature	8 minutes max.
* Tolerance for peak profile temperature ( $T_p$ ) is defined as a supplier minimum and a user maximum	

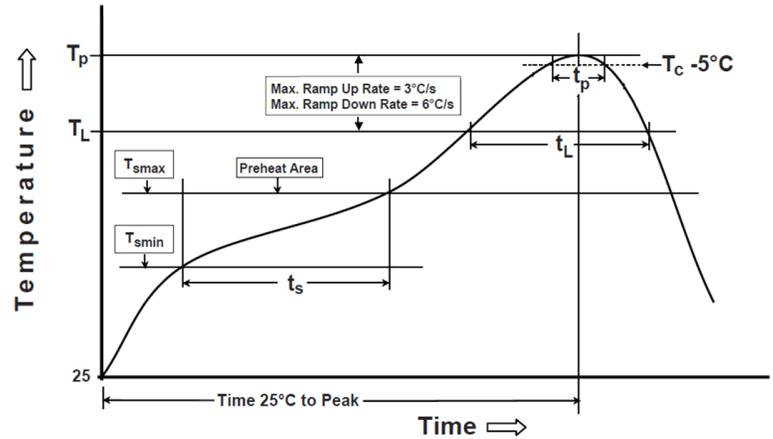

### Thermal Shock When Making Correction with a Soldering Iron:

- The temperature of solder iron tip should be controlled under 350°C and soldering time should be less than 3 sec.
- The soldering iron tip should not directly touch the top side termination of the component.


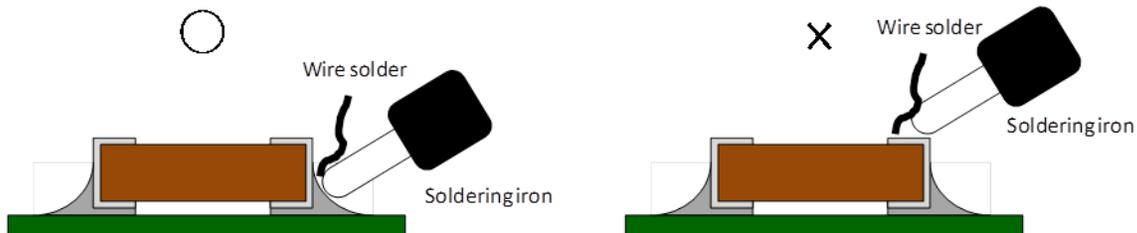


Fig 3 Correct handling method of soldering iron

## AirMatrix® Surface Mount Fuses

### AF Series, 2410 Size

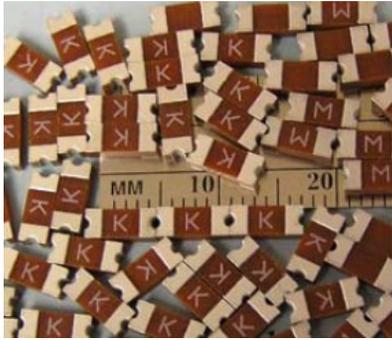

#### Features:


- Fast acting at 200% overload current level
- Excellent inrush current withstanding capability
- Fiberglass enforced epoxy fuse body
- Copper or copper alloy composite fuse link
- Copper termination with nickel and tin plating
- Halogen free, RoHS compliant and 100% lead-free
- Operating temperature range: -55°C to +125°C (with de-rating)

#### Application Fields:

- Power Supply, e.g. DC/DC converters, DC/AC inverters, Backlight drivers, etc.
- Consumer Electronics, e.g. LCD TVs, PDP, DVDs, PCM, etc.
- Communication Technology, e.g. Telecom systems, Networking, Modems, Routers, Chargers, Base stations, etc.
- Office Automation Electronics
- IT Products, e.g. LCD monitors, Notebooks, PC servers, etc.

#### Shape and Dimensions:

Unit	Inch	mm
<b>L</b>	0.240 ± 0.006	6.10 ± 0.15
<b>W</b>	0.098 ± 0.006	2.49 ± 0.15
<b>T</b>	0.085 ± 0.008	2.16 ± 0.20
<b>B</b>	0.053 ± 0.015	1.35 ± 0.38

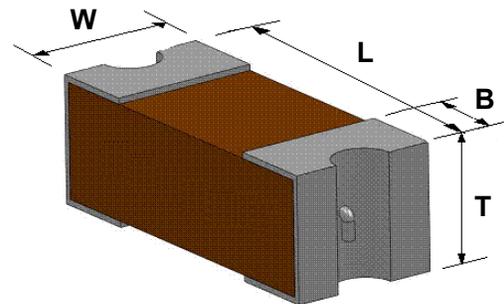

#### Clearing Time Characteristics:

% of Current Rating	Clearing Time at 25°C	
100%	4 hours min.	
200%(0.50~10.0 A)	0.01 seconds min.	5 seconds max.
200%(12.0~20.0 A)	0.01 seconds min.	20 seconds max.

#### Agency Approval:

- Recognized Under the Components Program of Underwriters Laboratories. File Number: E232989
- PSE Certificate No: NBK180711-JP13710
- TUV File Number: 50209083
- CQC No.: CQC11012065955

#### Patents:

Patent numbers "ZL200810092353.3", "ZL200910007157.6", "ZL201120450579.3", "ZL201120536307.5", "ZL201220063222.4", "ZL201110123326.X".

## AirMatrix® Surface Mount Fuses

### AF Series, 2410 Size

#### Ordering Information:


Part Number	Current Rating (A)	Voltage Rating (V)		Interrupting Rating	Nominal Cold DCR ( $\Omega$ ) <sup>1</sup>	Nominal $I^2t$ ( $A^2s$ ) <sup>2</sup>	Agency Approval				Marking (Optional) <sup>3</sup>
		AC	DC				UL	PSE	TUV	CQC	
AF2-0.50V125TM	0.5	250		<b>TUV:</b> 0.5 ~ 2 A 100 A @ 250 VAC 50 A @ 125 VDC	0.231	0.10	✓		✓	✓	C
AF2-0.63V125TM	0.63				0.174	0.16	✓		✓		S
AF2-0.75V125TM	0.75				0.148	0.23	✓				D
AF2-1.00V125TM	1.0				0.093	0.59	✓	✓	✓	✓	E
AF2-1.25V125TM	1.25				0.07	0.96	✓	✓	✓		F
AF2-1.50V125TM	1.5				0.062	1.19	✓	✓			G
AF2-2.00V125TM	2.0				0.042	2.75	✓	✓	✓	✓	I
AF2-2.50V125TM	2.5				0.031	1.21	✓	✓			J
AF2-3.00V125TM	3.0				0.0249	1.73	✓	✓			K
AF2-3.15V125TM	3.15				0.0232	2.2	✓	✓			V
AF2-3.50V125TM	3.5	125		<b>CQC:</b> 0.5 A, 1 A, 2 A 100 A @ 250 VAC 50 A @ 125 VDC	0.022	2.5	✓	✓			L
AF2-4.00V125TM	4.0				0.0172	4.1	✓	✓			M
AF2-5.00V125TM	5.0				0.0143	5.9	✓	✓			N
AF2-6.30V125TM	6.3				0.01	12.5	✓				O
AF2-7.00V125TM	7.0				0.0094	14.2	✓				P
AF2-8.00V125TM	8.0				0.0086	20.3	✓				R
AF2-10.0V125TM	10.0				0.0066	29.2	✓				Q
AF2-12.0V065TM	12.0				65	65	<b>UL:</b> 0.5 ~ 2 A 100A @ 250VAC 1.5 ~ 8 A 50A @ 125VAC 0.5 ~ 8 A 50 A @ 125 VDC 300 A @ 32 VDC	0.0053	49.2	✓	
AF2-15.0V065TM	15.0	0.0038	102.5	✓							Y
AF2-20.0V065TM	20.0	0.0034	126.2	✓							Z

1. Measured at  $\leq 10\%$  rated current and 25°C ambient.  
 2. Melting  $I^2t$  at 0.001 second pre-arcing time.  
 3. White Marking Character Code.

# AirMatrix<sup>®</sup> Surface Mount Fuses

## AF Series, 2410 Size


### Average Pre-arcing Time Curves:

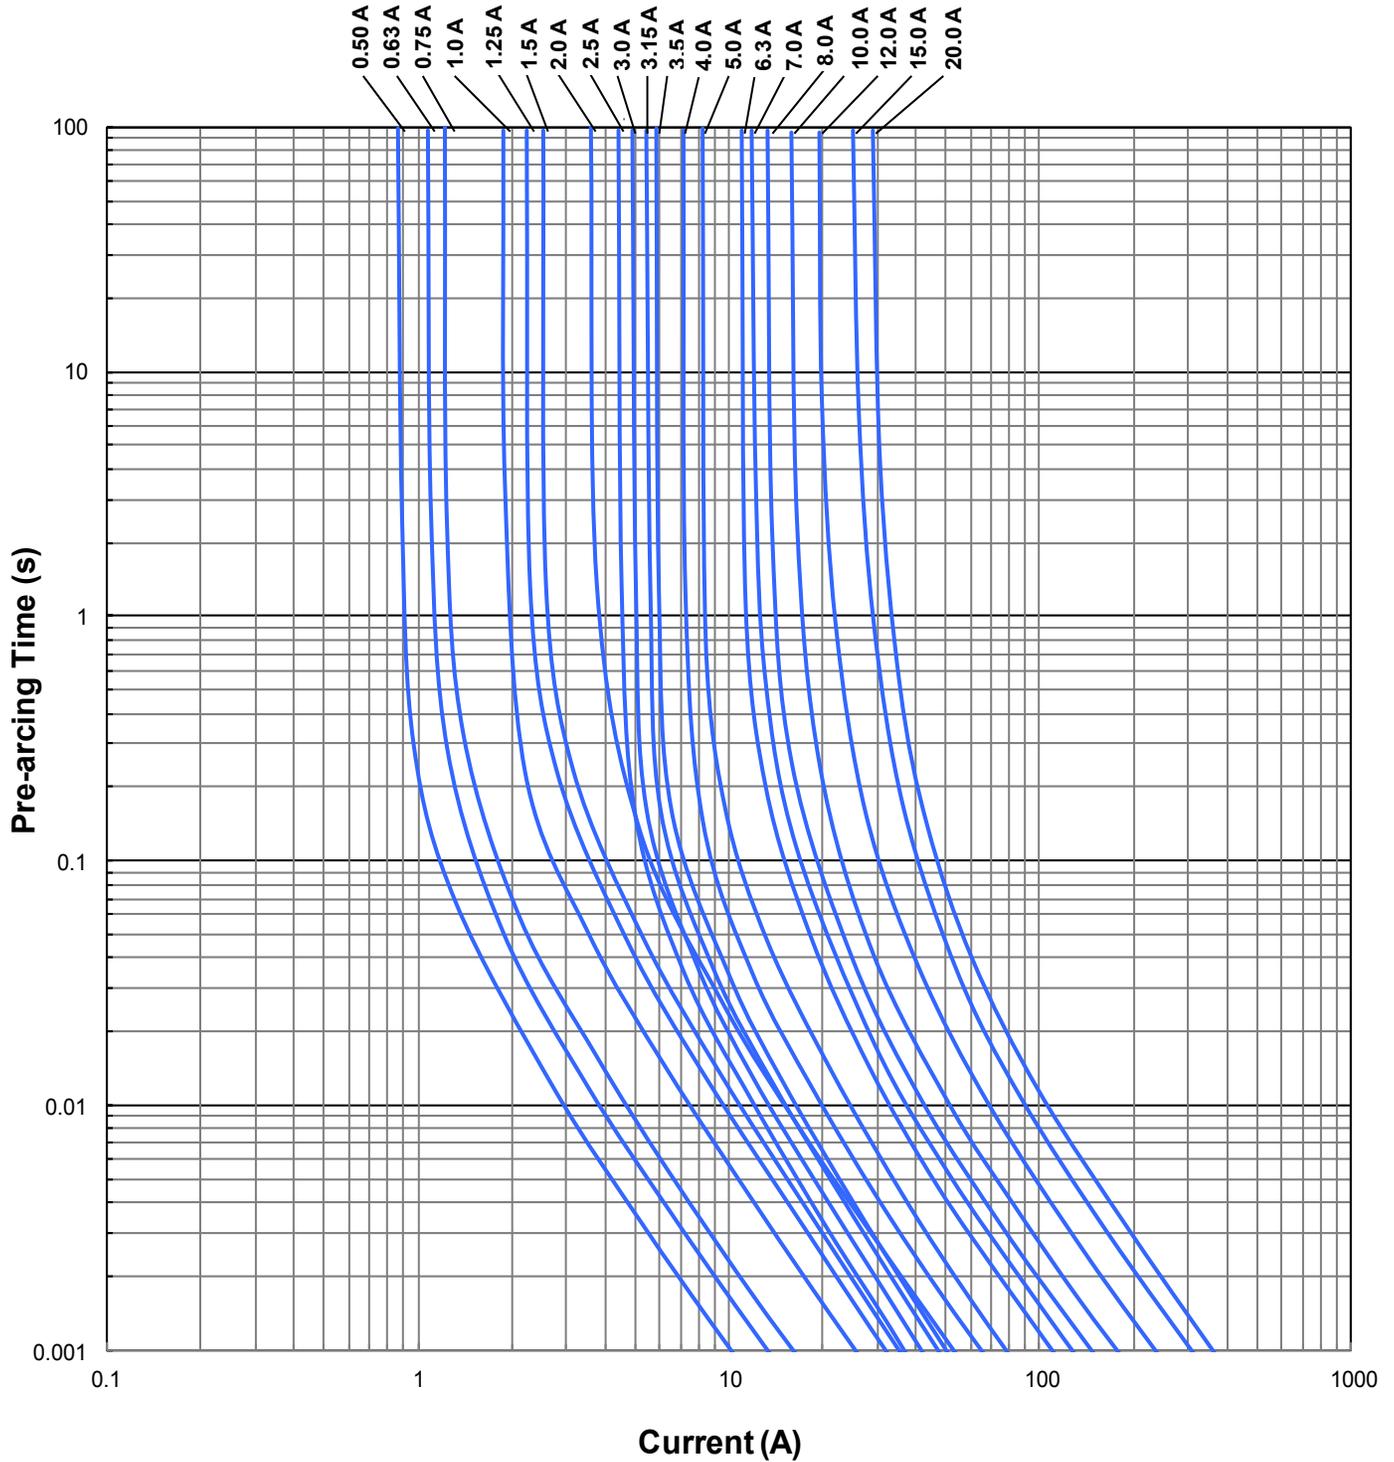

# AirMatrix<sup>®</sup> Surface Mount Fuses

## AF Series, 2410 Size

### Average $I^2t$ vs. $t$ Curves:

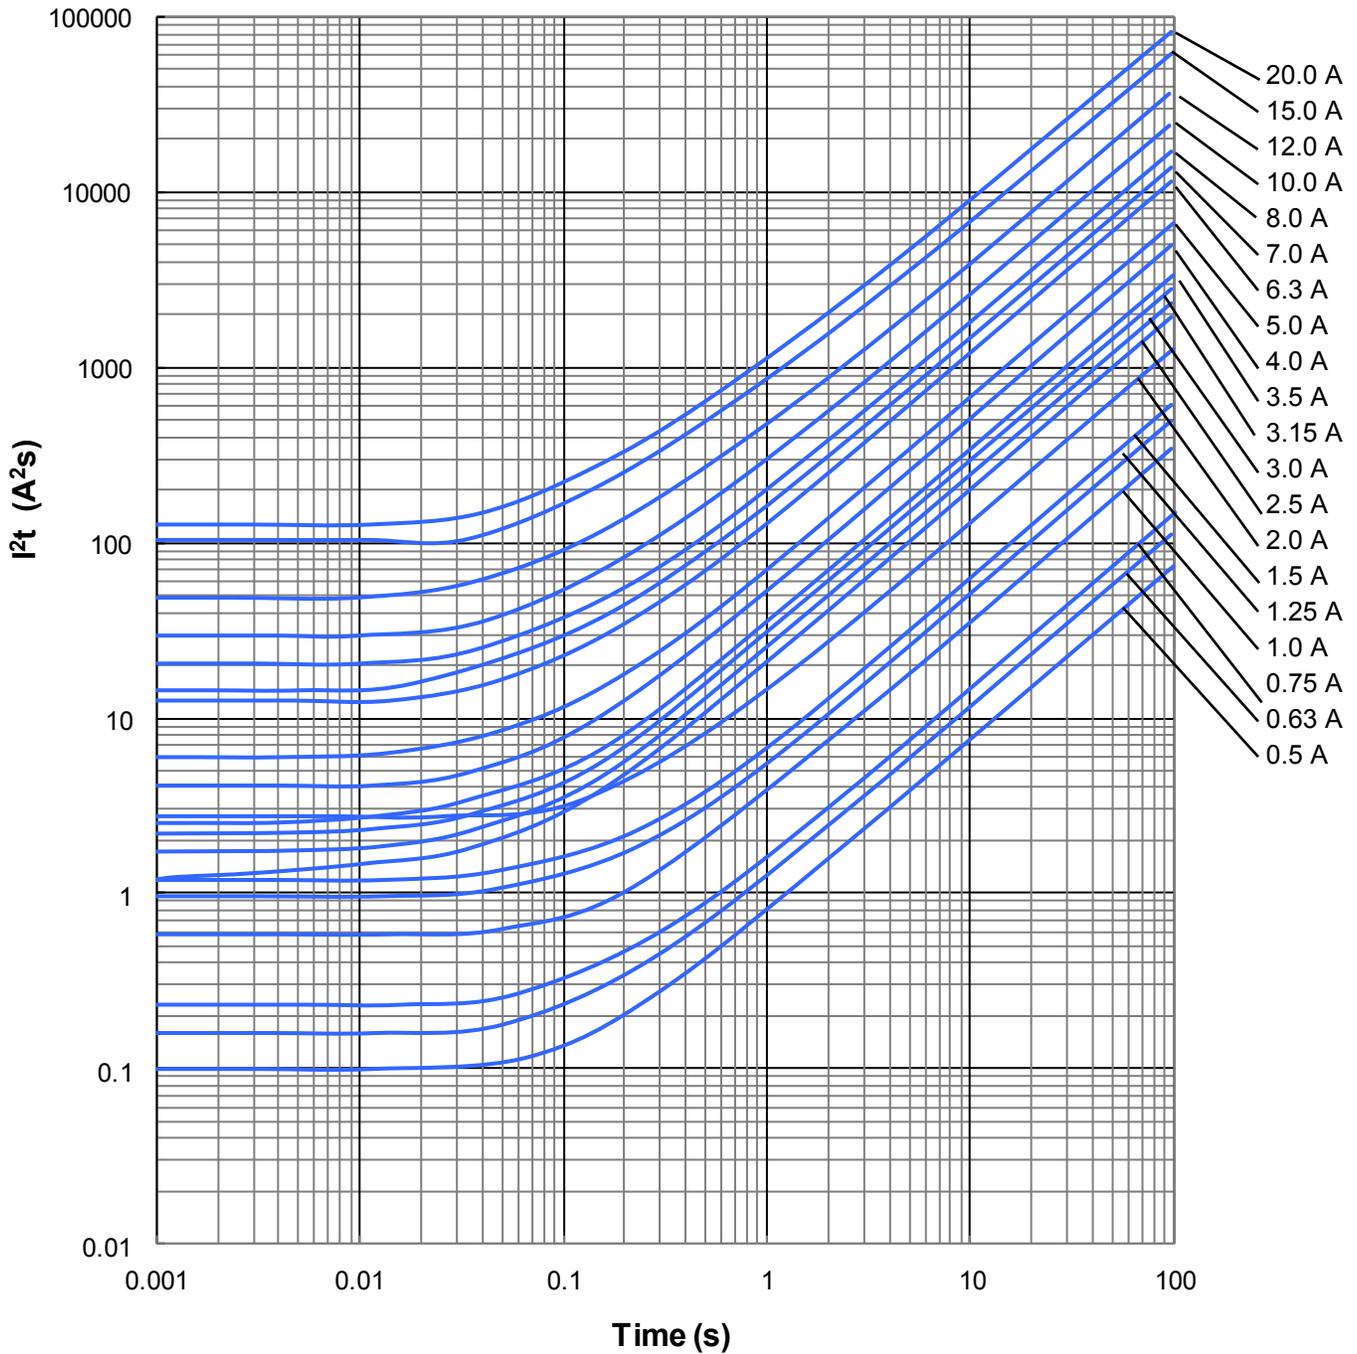

## AirMatrix® Surface Mount Fuses

### AF Series, 1206 Size



#### Features:

- Fast acting at 250% overload current level
- Excellent inrush current withstanding capability
- Extremely thin body for space saving
- Much safer with wire-in-air design
- Fiberglass enforced epoxy fuse body
- Copper termination with nickel and tin plating
- Operating temperature range: -55°C to +125 °C (with de-rating)
- 100% lead-free

#### Application Fields:


- Notebook, Ultrabook
- Backlight Driver
- DC/DC Converter
- Low voltage lighting power
- Automotive electronics

#### Shape and Dimensions:

Unit	Inch	mm
L	0.126 ± 0.008	3.20 ± 0.20
W	0.063 + 0.012 / -0.004	1.60 + 0.30 / -0.20
T	0.042 ± 0.006	1.08 ± 0.15
B	0.033 ± 0.012	0.85 ± 0.30

#### Clearing Time Characteristics:

% of Current Rating	Clearing Time at 25°C	
	Min.	Max.
100%	4 hour	
250%		5 seconds

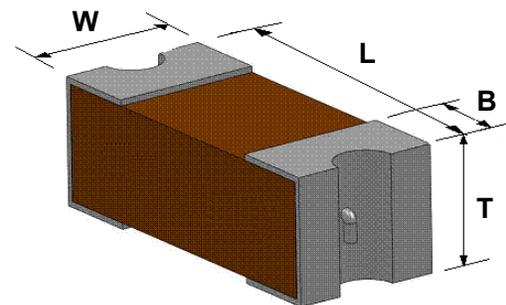

#### Agency Approval:

Recognized Under the Components Program of Underwriters Laboratories. File Number: E232989

## AirMatrix® Surface Mount Fuses

### AF Series, 1206 Size

#### Ordering Information:


Part Number	Current Rating (A)	Marking ( White )	Voltage Rating (VDC)	Interrupting Rating	Nominal DCR (Ω)	Nominal I <sup>2</sup> t (A <sup>2</sup> s)
AF1206F1.50TM	1.50	G	65	50A@65VDC	0.050	0.37
AF1206F1.60TM	1.60	T			0.043	0.52
AF1206F2.00TM	2.00	I			0.032	0.88
AF1206F2.50TM	2.50	J			0.028	1.1
AF1206F3.00TM	3.00	K			0.022	1.9
AF1206F3.15TM	3.15	V			0.020	2.2
AF1206F3.50TM	3.50	L			0.018	2.6
AF1206F4.00TM	4.00	M			0.016	3.3
AF1206F5.00TM	5.00	N	32	50A@32VDC	0.013	5.4
AF1206F6.30TM	6.30	O			0.010	8.9
AF1206F7.00TM	7.00	P			0.0092	10.4
AF1206F8.00TM	8.00	R			0.0084	13.5
AF1206F10.0TM	10.0	Q			0.0050	11.2
AF1206F12.0TM	12.0	X			0.0041	15.0
AF1206F15.0TM	15.0	Y			0.0035	24.5

1. Resistance is measured at  $\leq 10\%$  of rated current and 25°C ambient.
2. Melting I<sup>2</sup>t is calculated at 0.001 second pre-arcing time.

# AirMatrix<sup>®</sup> Surface Mount Fuses

## AF Series, 1206 Size


### Average Pre-arcing Time Curves:

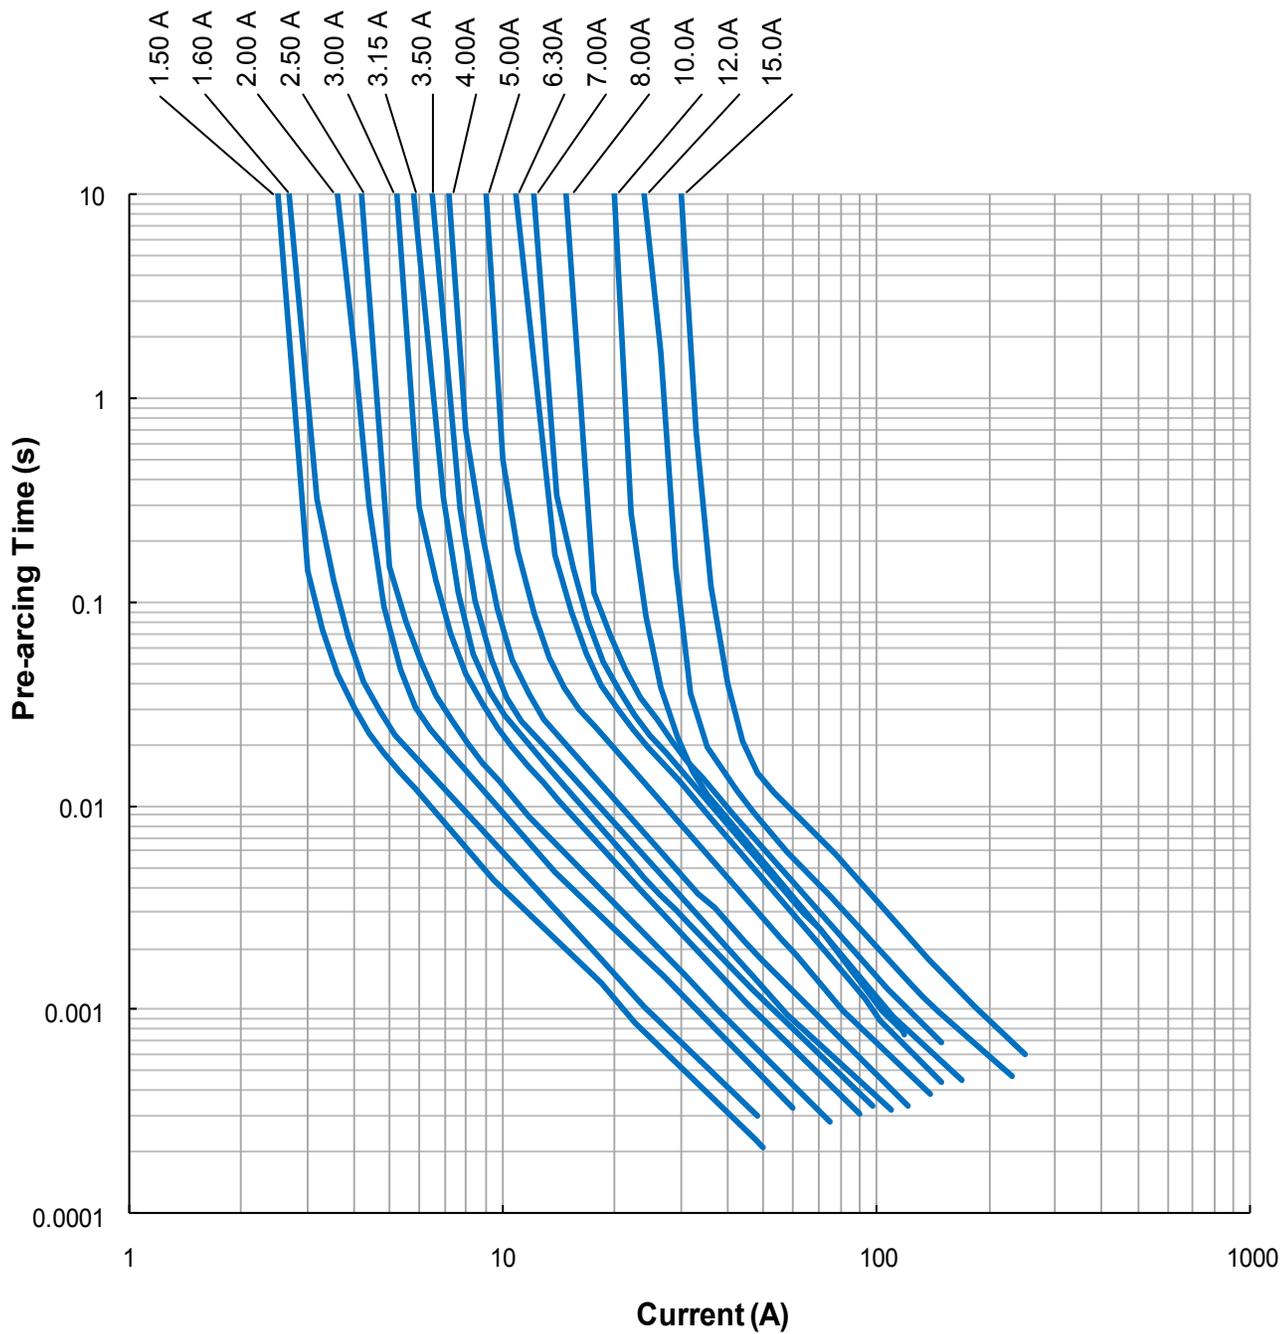

# AirMatrix<sup>®</sup> Surface Mount Fuses


## AF Series, 1206 Size

### Average $I^2t$ vs. $t$ Curves:

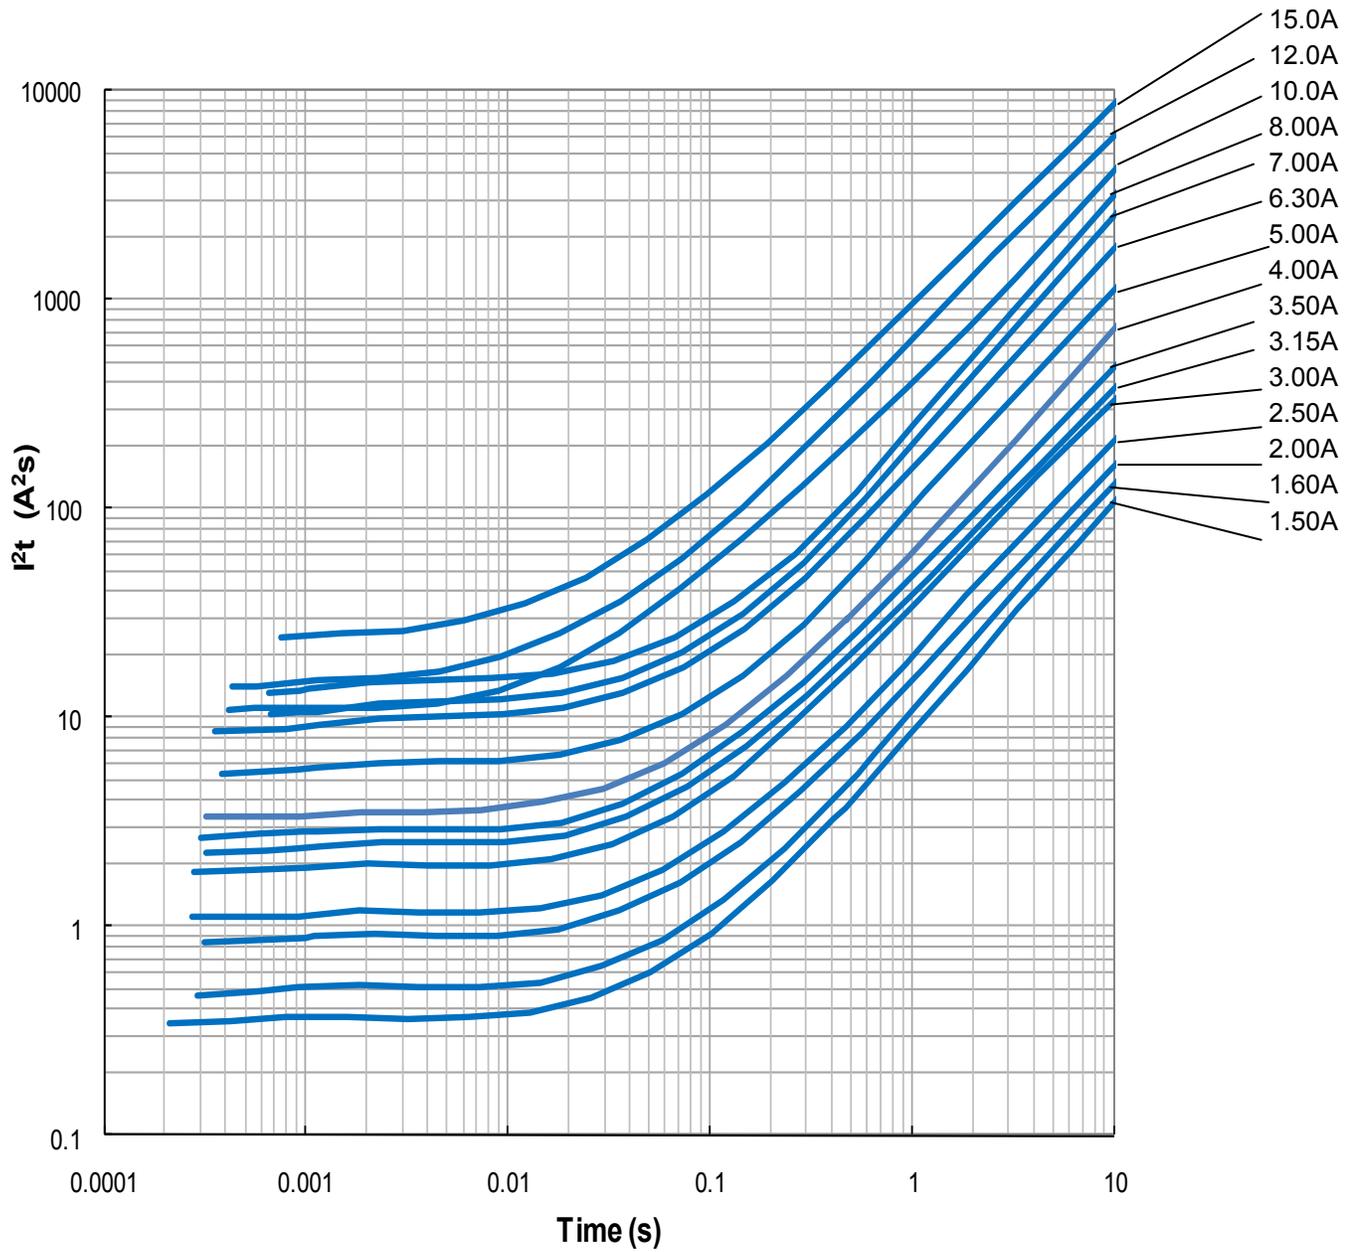

## AirMatrix® Surface Mount Fuses

### MF Series, 2410 Size

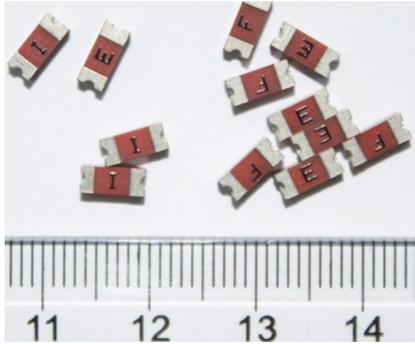

#### Features:


- Extremely small size with 250 VAC rating
- Surface mount fuses in AC applications
- Excellent inrush current withstanding capability
- Fiberglass enforced epoxy fuse body
- Copper termination with nickel and tin plating
- 100% lead-free
- Operating temperature range: -55°C to +125 °C (with de-rating)
- Compliant with IEC 60127-4

#### Application Fields:

- Lighting: Ballast, LED Drivers
- Power: Chargers, Adapters, Power Boards
- Medical Equipment
- Industrial Equipment
- White Goods

#### Shape and Dimensions:

	Inch	mm
L	0.240 ± 0.006	6.10 ± 0.15
W	0.098 ± 0.006	2.49 ± 0.15
H	0.085 ± 0.008	2.16 ± 0.20
BW	0.053 ± 0.015	1.35 ± 0.38
P	≥ 0.118	≥ 3.00

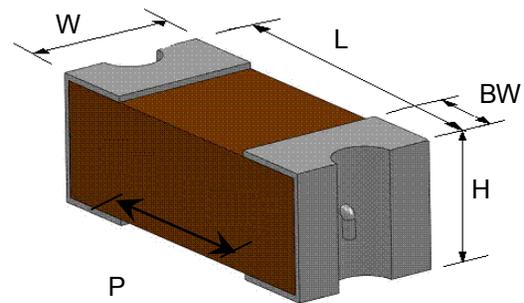

#### Clearing Time Characteristics:

% of Current Rating	Clearing Time at 25°C	
	Min.	Max.
125%	1 hour	
200%		120 seconds
1000%	0.001 seconds	0.01 seconds

#### Agency Approval:

Agency	File No.
UL	E232989
CQC	CQC11012065956
KC	SU05038-12001/12002
PSE	PSE12020434
VDE	40034853

#### Patents:

Patent numbers "ZL200810092353.3", "ZL200910007157.6", "ZL201120450579.3", "ZL201120536307.5", "ZL201220063222.4", "ZL201110123326.X".

## AirMatrix® Surface Mount Fuses

### MF Series, 2410 Size

#### Ordering Information:

Part Number	Current Rating (A)	Voltage Rating (VAC)	Interrupting Ratings	Nominal DCR ( $\Omega$ )	Voltage Drop Max. (mV)	Nominal $I^2t$ ( $A^2s$ )	Marking ( Black )
MF2410F0.500TM	0.50	250	100 A @ 250 VAC 50 A @ 125 VDC	0.206	166	0.11	C
MF2410F0.630TM	0.63	250		0.148	144	0.20	S
MF2410F0.800TM	0.80	250		0.109	139	0.35	H
MF2410F1.000TM	1.00	250		0.084	129	0.62	E
MF2410F1.250TM	1.25	250		0.065	128	1.00	F
MF2410F1.600TM	1.60	250		0.049	127	1.80	T
MF2410F2.000TM	2.00	250		0.038	123	3.00	I


**Notes:**

- Resistance is measured at  $\leq 10\%$  of rated current and  $25^\circ\text{C}$  ambient.
- Voltage drop is measured at 100% of rated current.
- Melting  $I^2t$  is calculated at 0.001 second pre-arcing time.

# AirMatrix<sup>®</sup> Surface Mount Fuses

## MF Series, 2410 Size


### Average Pre-arcing Time Curves:

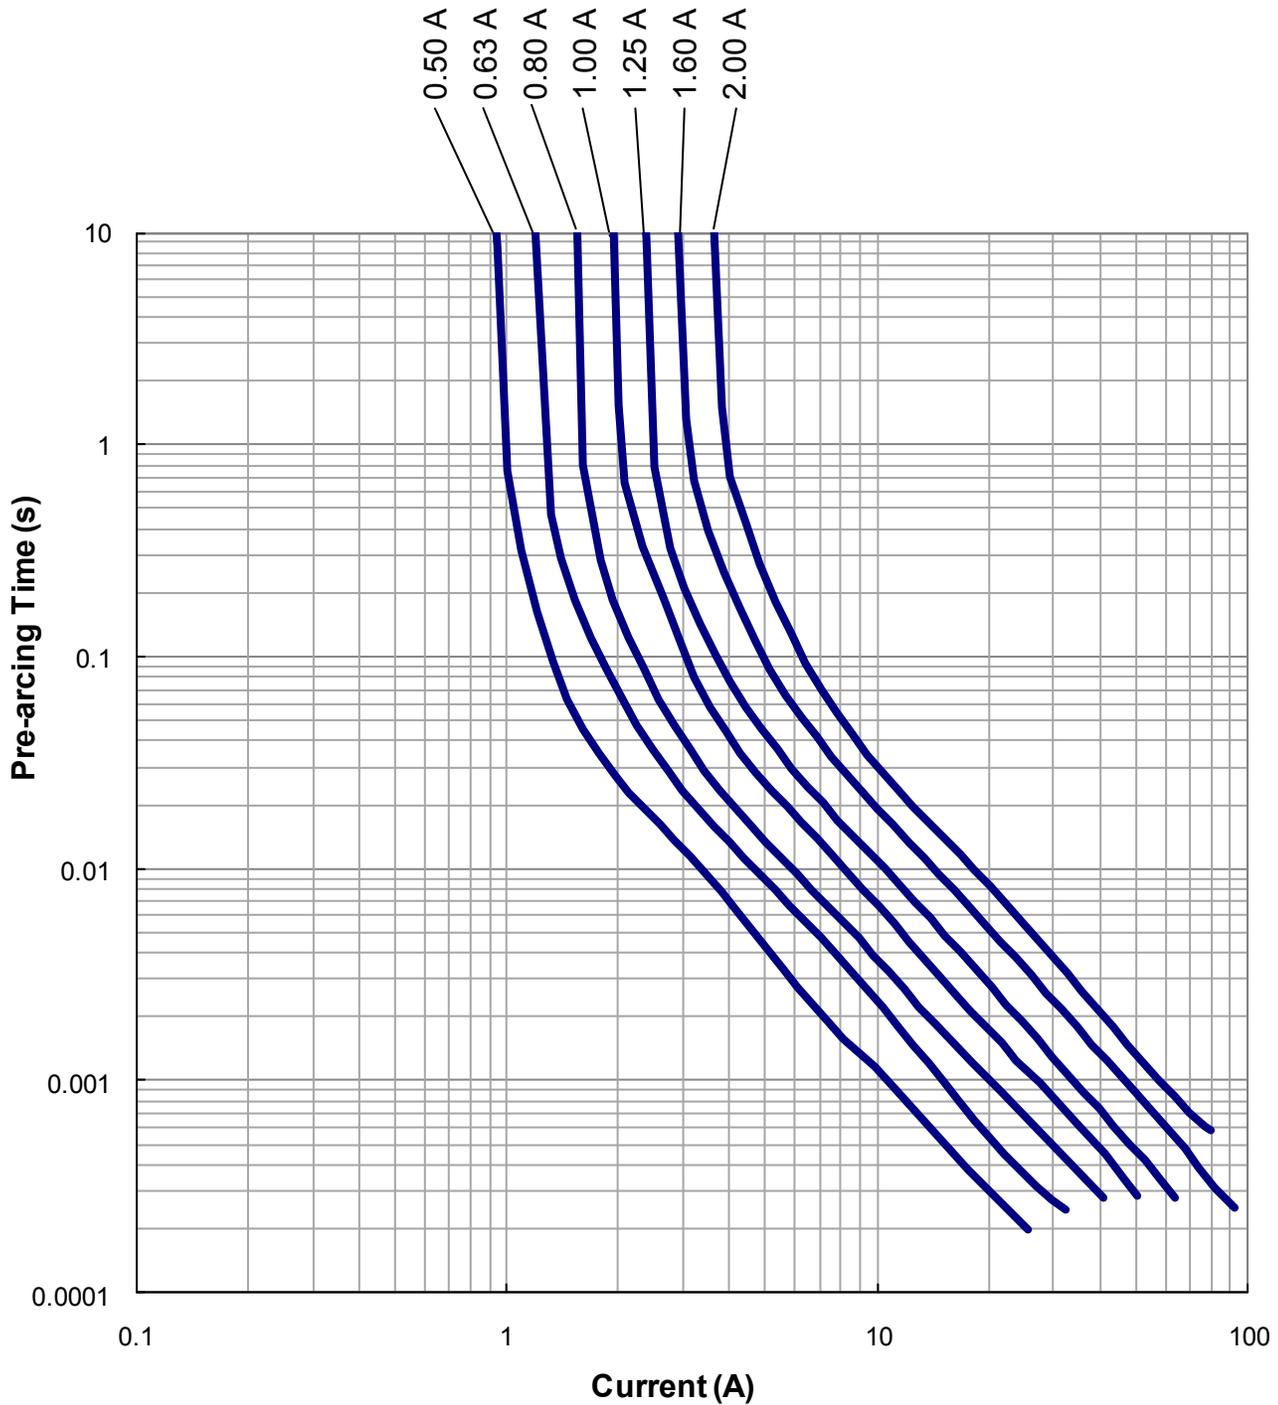

# AirMatrix<sup>®</sup> Surface Mount Fuses


## MF Series, 2410 Size

### Average $I^2t$ vs. $t$ Curves:

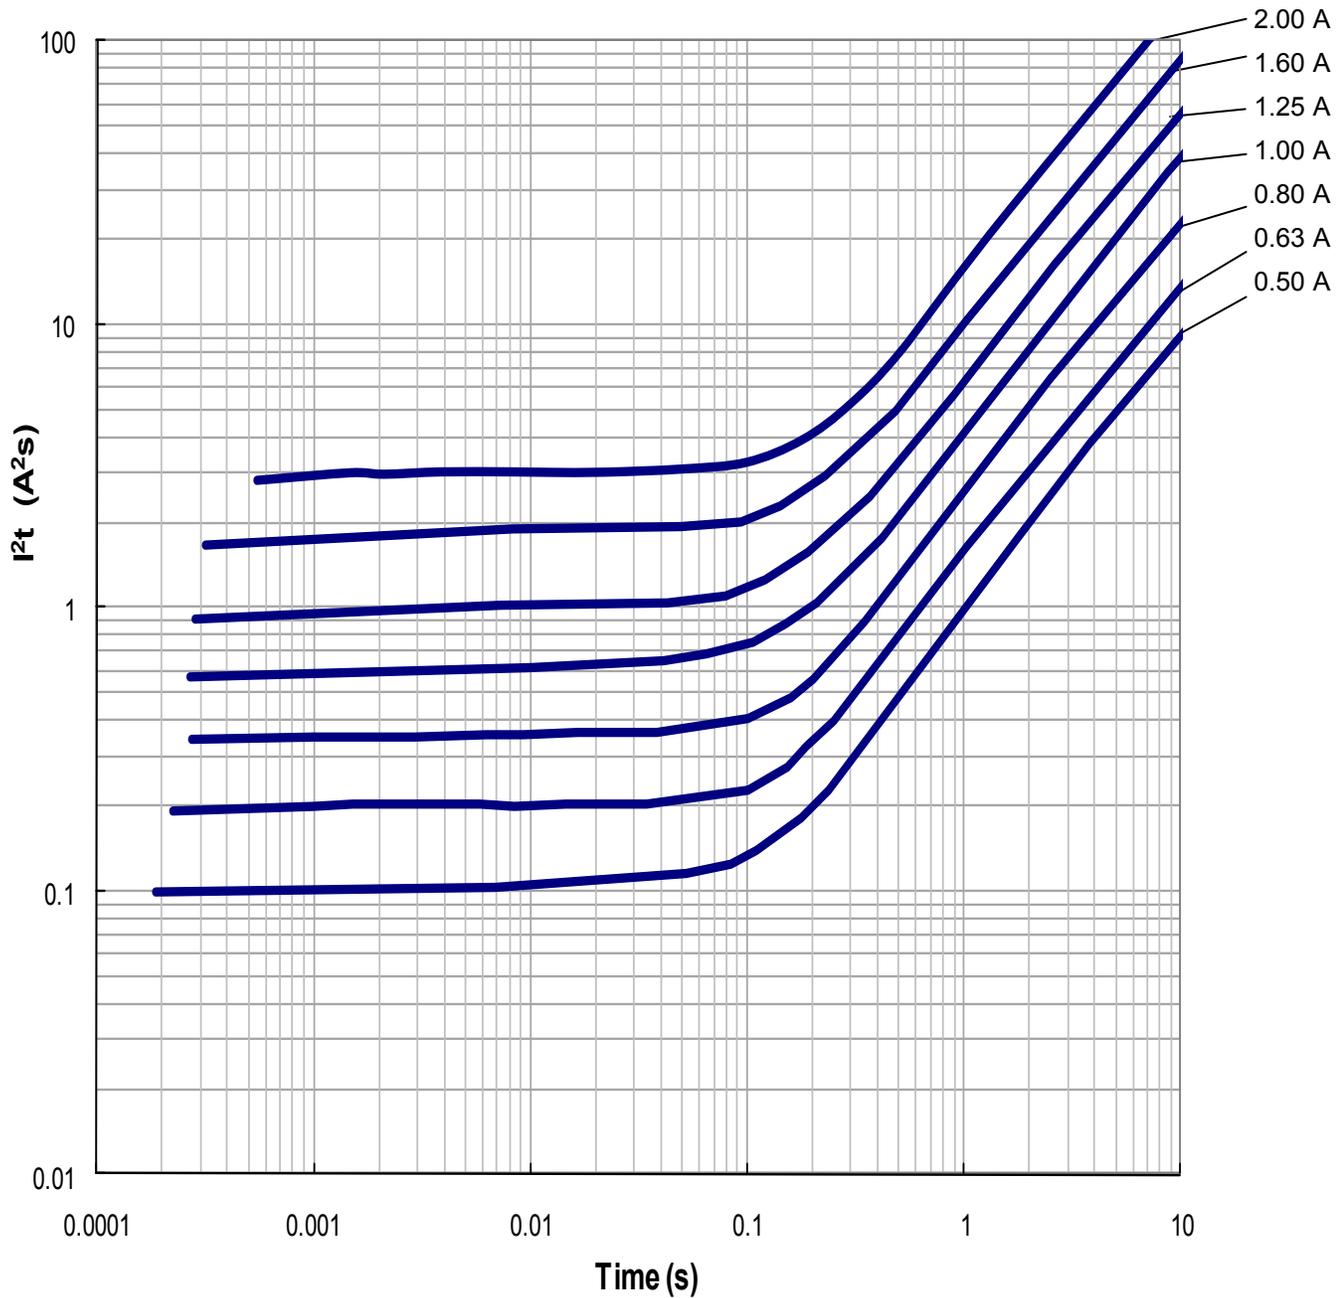

## AirMatrix® Surface Mount Fuses

### MF Series, 1210 Size

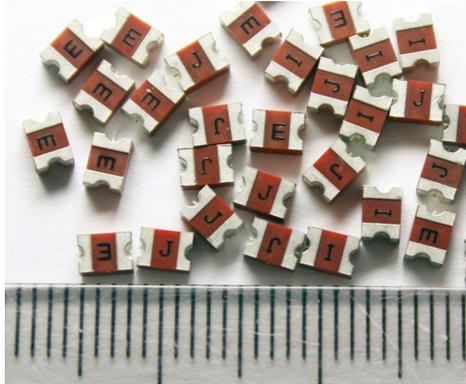

#### Features:

- Extremely small size with VAC rating
- Surface mount fuses in AC applications
- Excellent inrush current withstanding capability
- Operating temperature range: -55°C to +125°C (with de-rating)
- Fiberglass enforced epoxy fuse body
- Copper termination with nickel and in plating
- Halogen free, RoHS compliant
- 100% lead-free

#### Typical Application:

- Lighting and Driver
- Low Voltage Power and Charger
- Application
- Industrial Equipment
- White Goods

#### Clearing Time Characteristics:

% of current rating	Clearing time at 25°C
100%	4 hours min.
250%	5 seconds max.

#### Agency Approval:

Recognized Under the Components Program of UL.  
File Number: E232989.

#### Patents:

Patent numbers "ZL200810092353.3", "ZL200910007157.6",  
"ZL201120450579.3", "ZL201120536307.5",  
"ZL201220063222.4", "ZL201110123326.X".

#### Ordering Information:


Part Number	Current Rating (A)	Voltage Rating (VAC)	Interrupting Ratings	Nominal Cold DCR ( $\Omega$ ) <sup>1</sup>	Nominal $I^2t$ ( $A^2s$ ) <sup>2</sup>	Marking (Black)
MF1210F1.00TM	1.00	125	100 A @ 125 VAC 100 A @ 65 VDC	0.079	0.2	E
MF1210F1.50TM	1.50			0.050	0.5	G
MF1210F2.00TM	2.00			0.037	0.9	I
MF1210F2.50TM	2.50			0.033	1.2	J
MF1210F3.00TM	3.00			0.028	1.5	K

Notes:

- Resistance is measured at  $\leq 10\%$  of rated current and 25°C ambient.
- $I^2t$  is measured at 0.001s.

#### Shape and Dimensions:


Unit	Inch	mm
L	0.126 + 0.016/-0	3.20 + 0.40/-0
W	0.098 ± 0.008	2.50 ± 0.20
H	0.063 ± 0.008	1.60 ± 0.20
BW	0.033 ± 0.012	0.85 ± 0.30
P	$\geq 0.063$	$\geq 1.6$

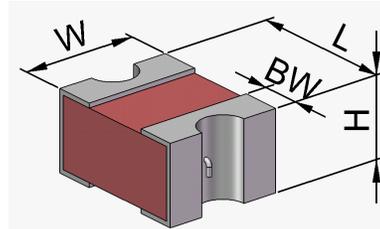

# AirMatrix<sup>®</sup> Surface Mount Fuses


## MF Series, 1210 Size

### Average Pre-arcing Time Curves:

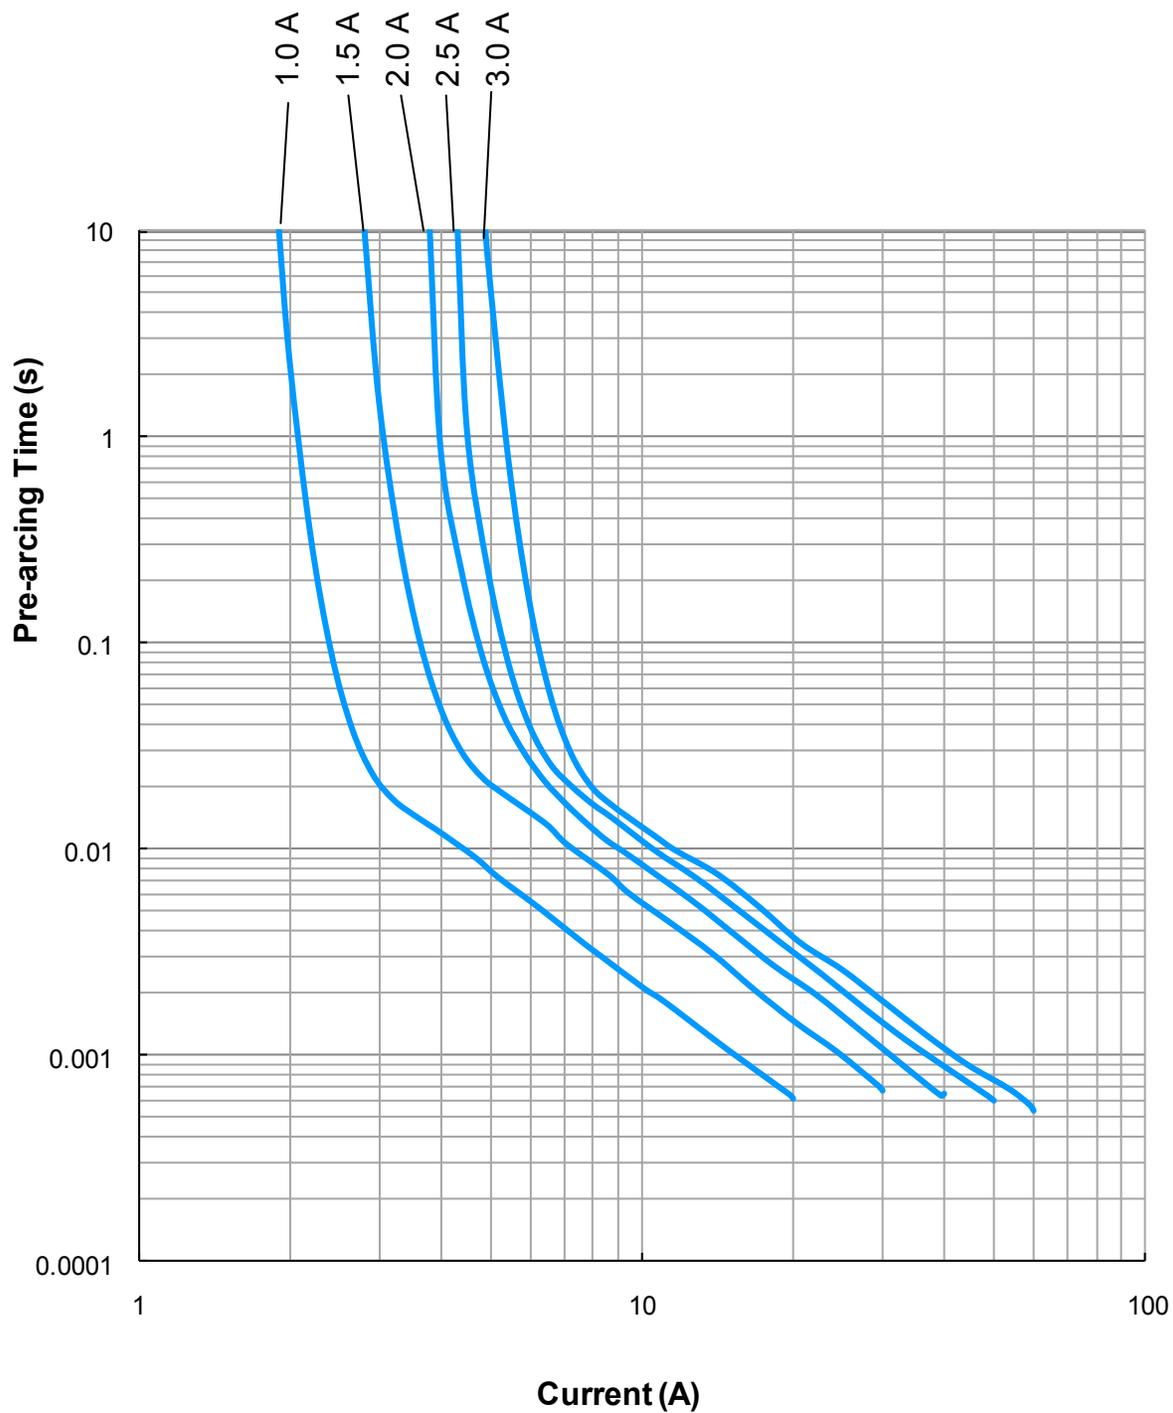

**AirMatrix<sup>®</sup> Surface Mount Fuses**  
**MF Series, 1210 Size**

**Average I<sup>2</sup>t vs. t Curves:**

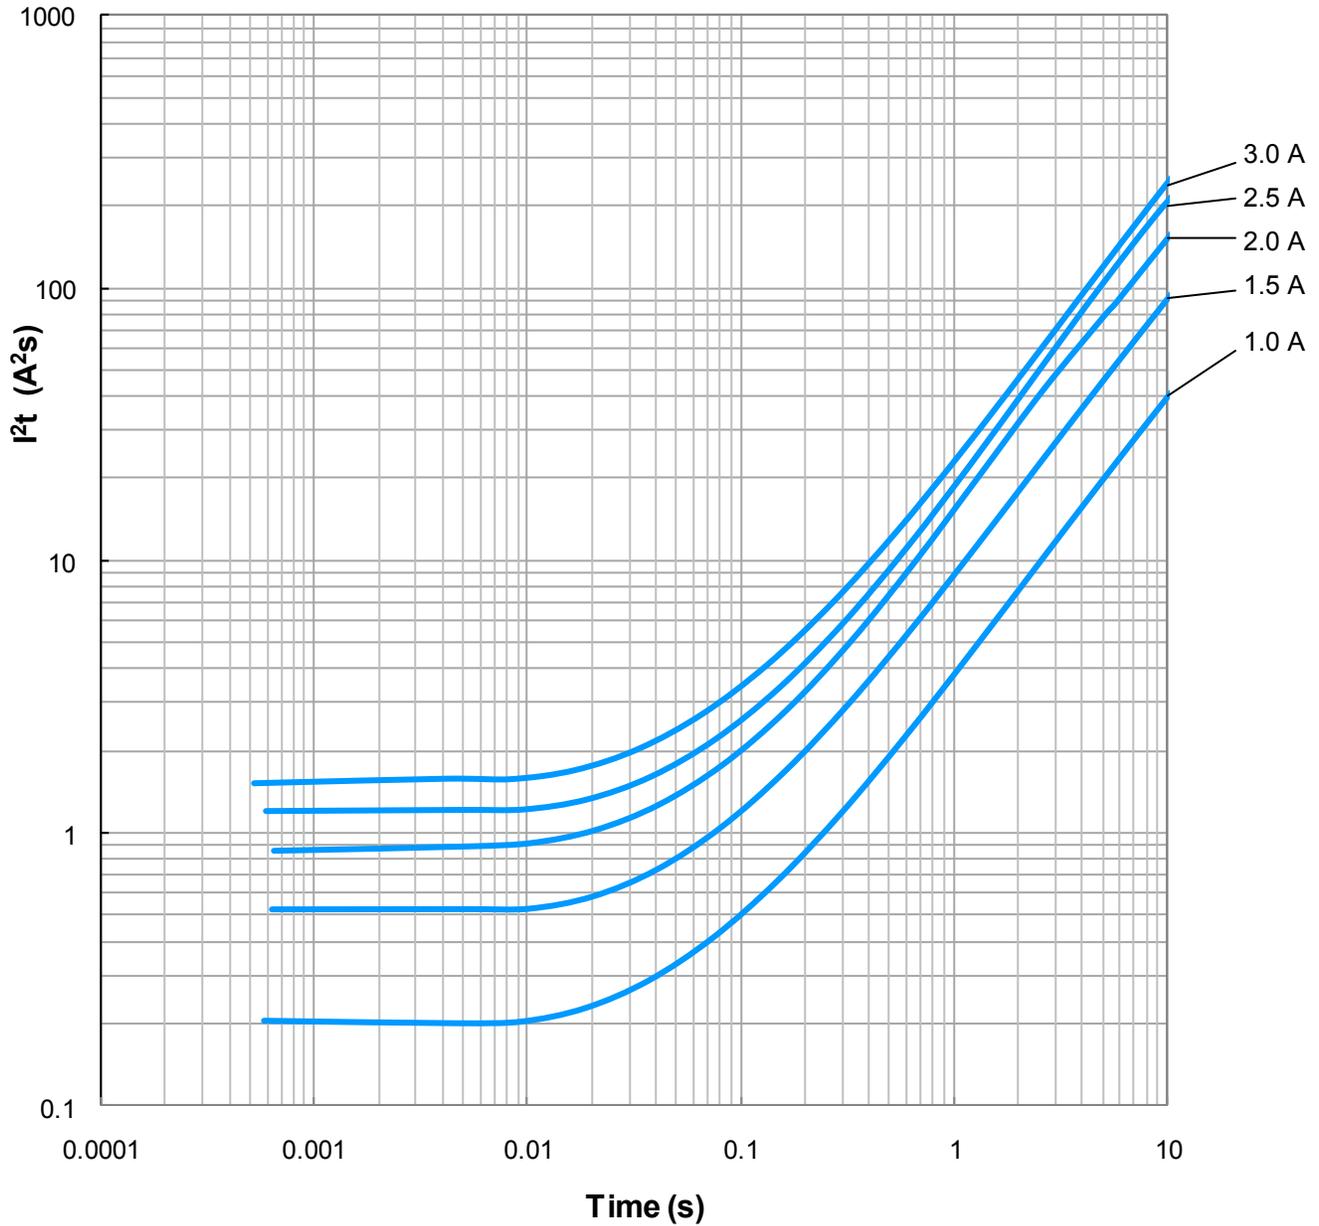

## AirMatrix® Surface Mount Fuses

### Product Identification:

AF2 1.00 V125 T M

(1) (2) (3) (4) (5)

(1) Series code: AF2

(2) Current rating code: 1.00 - 1.00 A

(3) Voltage rating code: V125 - 125 VDC

(4) Package code:

T - Tape & Reel

B - Bulk

(5) Marking code: M - with mark

AF 1206 F 2.00 T M

(1) (2) (3) (4) (5) (6)

(1) Series code: AF-AF Series; MF-MF Series

(2) Size code: Standard EIA Chip Sizes

(3) Time/Current characteristic: F

(4) Current rating: 2.00 — 2.00A

(5) Package code:

T - Tape & Reel

B - Bulk

(6) Marking code: M - with mark


### Environmental Tests:

Reliability Test	Test Condition and Requirement	Test Reference
Reflow & Bend	3 reflows at 245°C followed by a 2 mm bend, 20% DCR change max. (10% for $\leq 1$ A), no mechanical damage	Refer to AEM QIQ034 , QIQ048
Solderability	245°C, 5 seconds, new solder coverage 90% minimum	MIL-STD-202 Method 208
Soldering Heat Resistance	260°C, 10 seconds, 20% DCR change max. (10% for $\leq 1$ A), new solder coverage 75% minimum	MIL-STD-202 Method 210
Life	25°C, 2000 hours, 80% rated current (75% for $< 1$ A), voltage drop change $\leq \pm 20\%$	Refer to AEM QIQ106
Thermal Shock	-65°C to +125°C, 100 cycles, 10% DCR change max., no mechanical damage	MIL-STD-202 Method 107
Mechanical Vibration	5 – 3000 Hz, 0.4 inch double amplitude or 30 G peak, 10% DCR change max., no mechanical damage	MIL-STD-202 Method 204
Mechanical Shock	1500 G, 0.5 milliseconds, half-sine shocks, 10% DCR change max., no mechanical damage	MIL-STD-202 Method 213
Salt Spray	5% salt solution, 48 hour exposure, 10% DCR change max., no excessive corrosion	MIL-STD-202 Method 101
Moisture Resistance	10 cycles, 15% DCR change max., no excessive corrosion	MIL-STD-202 Method 106

# AirMatrix® Surface Mount Fuses


## Soldering Temperature Profile:

\* Recommended Temperature Profile for Reflow Soldering

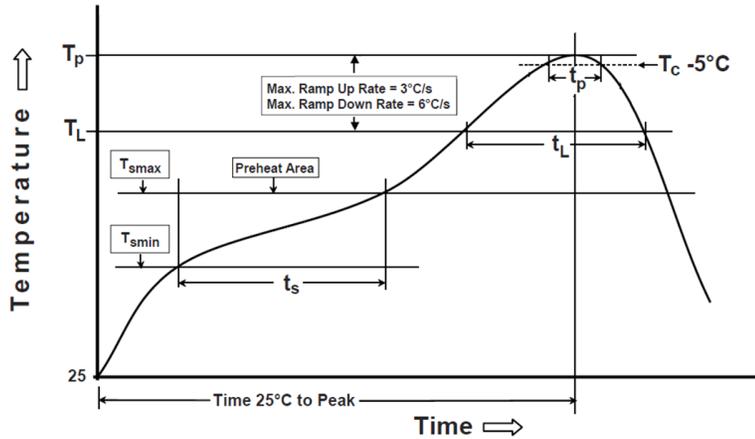

Profile Feature	Pb-Free Assembly
<b>Preheat/Soak</b> Temperature Min ( $T_{smin}$ ) Temperature Max ( $T_{smax}$ ) Time ( $t_s$ ) from ( $T_{smin}$ to $T_{smax}$ )	150°C 200°C 60~120 seconds
Ramp-uprate ( $T_L$ to $T_p$ )	3°C/second max.
Liquidous temperature ( $T_L$ ) Time ( $t_L$ ) maintained above $T_L$	217°C 60~150 seconds
Peak package body temperature ( $T_p$ )	260°C
Time ( $t_p$ )*within 5°C of the specified classification temperature ( $T_c$ )	30 seconds *
Ramp-down rate ( $T_p$ to $T_L$ )	6°C/second max.
Time 25°C to peak temperature	8 minutes max.
* Tolerance for peak profile temperature ( $T_p$ ) is defined as a supplier minimum and a user maximum	

\* Recommended Temperature Profile for Wave Soldering

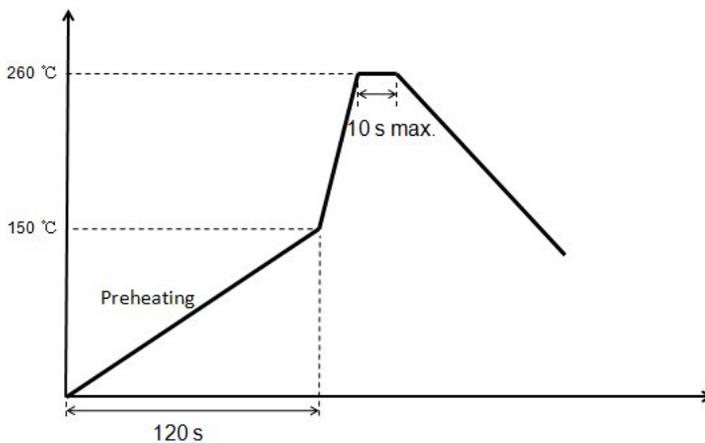

## AirMatrix® Surface Mount Fuses


### Fuse Selection and Temperature De-rating Guideline:

The ambient temperature affects the current carrying capacity of fuses. When a fuse is operating at a temperature higher than 25°C, the fuse shall be “de-rated”.

To select a fuse from the catalog, the following rule may be followed:


Catalog Fuse Current Rating = Nominal Operating Current / 0.75 / % De-rating at the maximum operating temperature.

Example: At maximum operating temperature of 65°C, % De-rating is 90%. The nominal operating current is 4 A. The current rating for fuse selected from the catalog shall be:  
 $4 / 0.75 / 90\% = 5.9$  or 6.3 A.

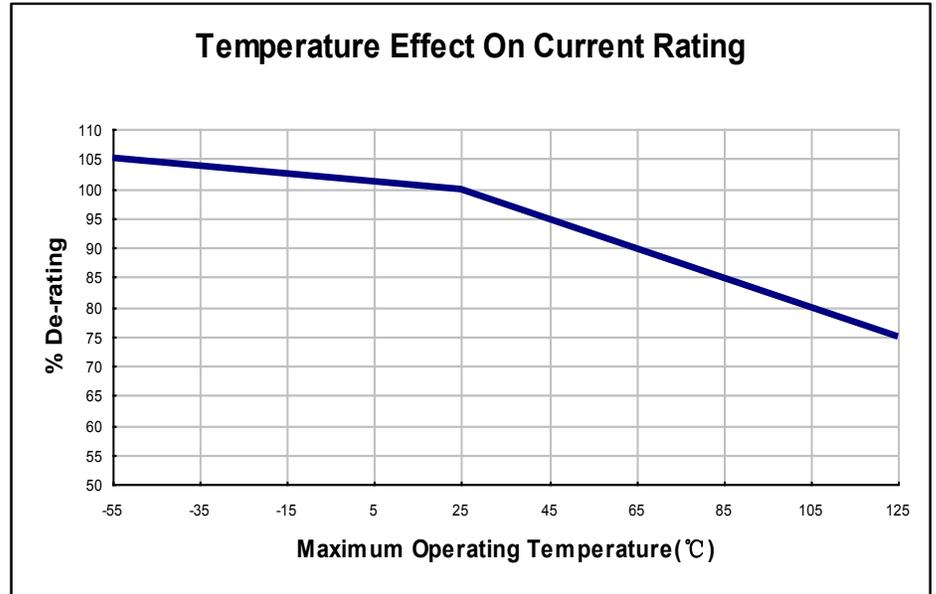

### Recommended Land Pattern:

	AF2		AF1206		MF2410		MF1210	
	Inch	mm	Inch	mm	Inch	mm	Inch	mm
<b>L</b>	0.338	8.60	0.173	4.40	0.338	8.60	0.170	4.40
<b>G</b>	0.118	3.00	0.059	1.50	0.118	3.00	0.070	1.70
<b>H</b>	0.124	3.15	0.071	1.80	0.110	2.80	0.110	2.70

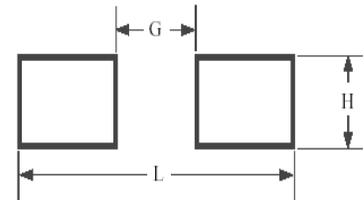

### Packaging:

Chip Size	Parts on 7 inch (178 mm) Reel
2410 (6125)	2,000
1210 (3225)	2,500
1206 (3216)	3,500

### Storage:

The maximum ambient temperature shall not exceed 35°C . Storage temperatures higher than 35°C could result in the deformation of packaging materials.


The maximum relative humidity recommended for storage is 75%. High humidity with high temperature can accelerate the oxidation of the solder plating on the termination and reduce the solderability of the components.

Sealed vacuum foil bags with desiccant should only be opened prior to use.

The products should not be stored in areas where harmful gases containing sulfur or chlorine are present.

## Surface Mount ESD Suppressors

### GcDiode<sup>®</sup> ESD Suppressors

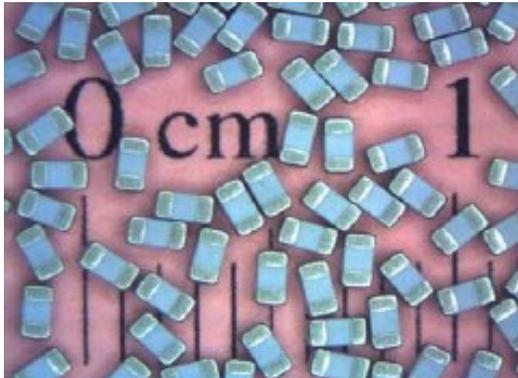

#### Features:


- Glass ceramic monolithic structure
- Ultra low capacitance (0.25 pF typical)
- Low leakage current (<0.1 nA)
- Fast response time (<1 ns)
- Bi-directional flip-chip design
- Low clamping voltage
- Silver termination with nickel
- Withstands multiple 8 kV ESD strikes
- 100% lead-free and RoHS compliant

#### Electrical Characteristics:

Characteristic	Value
IEC61000-4-2 Direct Discharge	Level 4 – 8 kV
IEC61000-4-2 Air Discharge	Level 4 – 15 kV
Trigger Voltage	300 V (typical) (measured per IEC61000-4-2, Level 4, 8 kV)
Clamping Voltage	30 V (typical) (measured per IEC61000-4-2, Level 4, 8 kV)
Response Time	Less than 1 ns
Capacitance (1 GHz)	0.25 pF (typical)
Leakage Current	Less than 0.1 nA (typical) (measured at 14 VDC)
Rated Voltage	14 VDC (max.)
ESD Pulse Withstand	1000 Pulses (typical)

#### Shape and Dimensions:

Size	L	W	T	BW
0402 (1005)	0.039 ± 0.004 (1.00 ± 0.10)	0.020 ± 0.004 (0.51 ± 0.10)	0.020 ± 0.004 (0.51 ± 0.10)	0.010 ± 0.004 (0.25 ± 0.10)
0603 (1608)	0.063 ± 0.006 (1.60 ± 0.15)	0.031 ± 0.006 (0.80 ± 0.15)	0.031 ± 0.006 (0.80 ± 0.15)	0.014 ± 0.006 (0.36 ± 0.15)

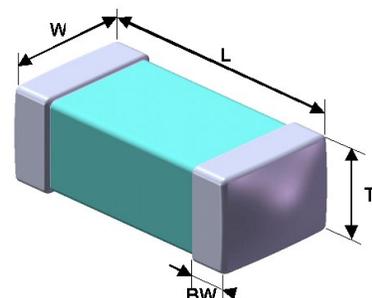


## Surface Mount ESD Suppressors

### GcDiode® ESD Suppressors

#### Recommended PC Board Land Pattern:

Chip Size	L Inch (mm)	G Inch (mm)	H Inch (mm)
0402 (1005)	0.063 (1.60)	0.016 (0.40)	0.028 (0.70)
0603 (1608)	0.087 (2.20)	0.031 (0.80)	0.039 (1.00)

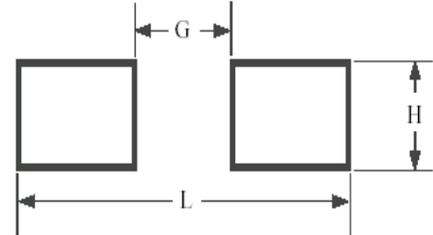

#### Patents:

Patent numbers "ZL200810215909.3".

#### Product Identification:

ES 0603 V014 C I  
 (1) (2) (3) (4) (5)

- (1) Category code
- (2) Dimension code: L x W (inch)  
 The first two digits - L (length)  
 The last two digits - W (width)
- (3) Rated voltage code: V014 -14 VDC
- (4) Series code
- (5) Package code:  
 T - Tape & Reel  
 B - Bulk

#### Representative Test Waveform Per IEC61000-4-2 Level 4, 8kV:



## Surface Mount ESD Suppressors

### GcDiode® ESD Suppressors

#### Reliability Tests:


Reliability Test	Test Conditions and Requirements	Test Reference
Flexure Strength	2 mm bend, meet triggering voltage and clamping voltage requirements while being bent, and meet leakage current requirement after bending.	IEC60068-2-21
Solderability	255°C, 5 seconds 90% coverage min.	MIL-STD-202 Method 208
Soldering Heat Resistance	260°C, 10 seconds No mechanical damage Pass ESD test.	MIL-STD-202 Method 210
Thermal Shock	100 cycles between -65°C and +125°C No mechanical damage Pass ESD test	MIL-STD-202 Method 107
Mechanical Vibration	0.4" D.A. or 30 G between 5-3000 Hz No mechanical damage Pass ESD test	MIL-STD-202 Method 204
Mechanical Shock	1500 G, 0.5 ms, half-sine shocks No mechanical damage Pass ESD test	MIL-STD-202 Method 213
Salt Spray	48 hour exposure No excessive corrosion Pass ESD test	MIL-STD-202 Method 101
Moisture Resistance	10 cycles No excessive corrosion Pass ESD test	MIL-STD-202 Method 106
Endurance	85°C, 1000 hours, rated voltage Leakage current less than 100 nA	Refer to AEM QIQ

#### Packaging Data:

Chip Size	Parts on 7 inch (178 mm) Reel
0402 (1005)	10,000
0603 (1608)	4,000

## Surface Mount ESD Suppressors

### PeDiode<sup>®</sup> ESD Suppressors, PS0402V014AT

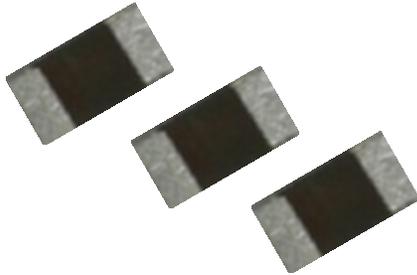

#### Features:

- Excellent protection against ESD damage
- Ultra low capacitance for high speed data lines (<0.1 pF)
- Low typical leakage current (<10 nA)
- Fast response time (<1 ns)
- Excellent 4KV trigger capability (100%)
- Bi-directional design
- Lead free and halogen free polymer composite materials
- RoHS compliant
- Operating temperature  $-55^{\circ}\text{C} \sim +90^{\circ}\text{C}$

#### Applications:

- Antennas
- USB2.0/3.0
- HDMI1.3/1.4
- Computer Peripherals
- Display Port
- Smart Mobile Phone
- Set Top Box
- Notebook

#### Features:

- PS 0402 V014 A I  
 (1) (2) (3) (4) (5)
- (1) Category code
  - (2) Dimension code: L x W (inch)  
 The first two digits - L (length)  
 The last two digits - W (width)
  - (3) Rated voltage code: V014 - 14 V<sub>DC</sub>
  - (4) Series code
  - (5) Package code: T - Tape & Reel

#### Electrical Characteristics (@ 25°C):


Characteristic	Value
IEC61000-4-2 Direct Discharge	Level 4 – 8 kV
IEC61000-4-2 Air Discharge	Level 4 – 15 kV
Trigger Voltage	300 V typical
Clamping Voltage	25 V typical
Response Time	Less than 1 ns
Capacitance @ f = 1GHz	0.05 pF typical
Leakage Current @ 14 V <sub>DC</sub>	10 nA max
Rated Voltage	14 V <sub>DC</sub> max
ESD Pulse Withstand	1000 Pulses typical

## Surface Mount ESD Suppressors

### PeDiode<sup>®</sup> ESD Suppressors, PS0402V014AT

#### Shape and Dimensions:

Size Inch/(mm)	L	W	T	BW
<b>0402</b> <b>(1005)</b>	0.039±0.004 (1.00 ± 0.10)	0.020±0.004 (0.50 ± 0.10)	0.014±0.004 (0.35 ± 0.10)	0.009±0.004 (0.23 ± 0.10)

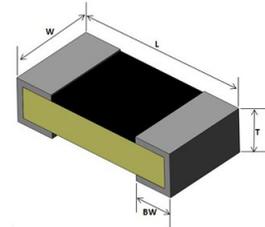

#### Representative Test Waveform Per IEC61000-4-2 Level 4, 8kV Direct Discharge:


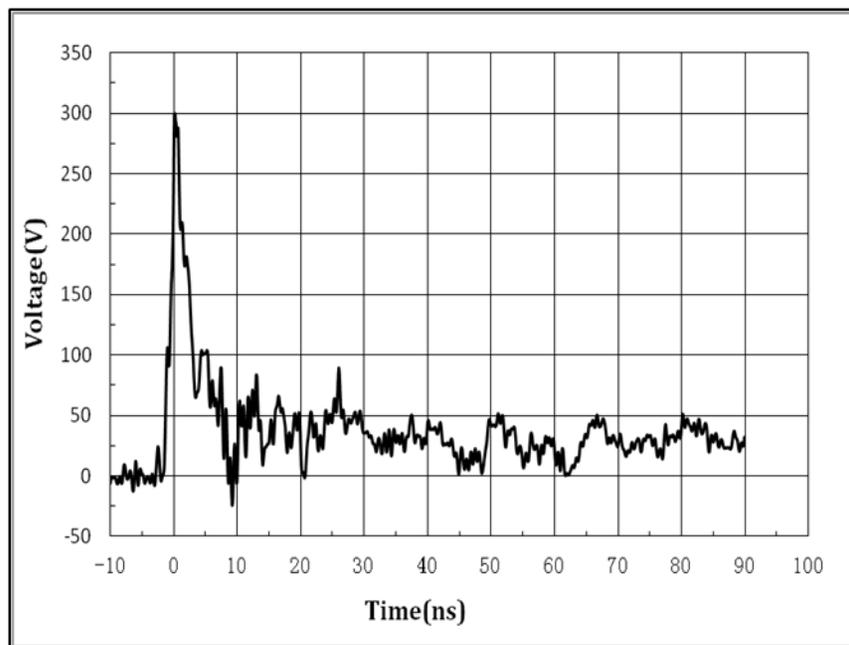


Fig.4 Clamped +8kV pulse waveform

#### Recommended Foot Print Dimensions:

Size Inch/(mm)	L	G	H
<b>0402</b> <b>(1005)</b>	0.063 (1.60)	0.016 (0.40)	0.028 (0.70)

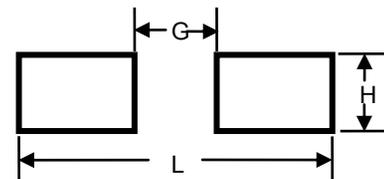

#### Packaging and Marking Information:


Package	Tape & Reel Quantity (piece)
<b>0402 (1005)</b>	15,000

## Surface Mount ESD Suppressors

### PeDiode<sup>®</sup> ESD Suppressors, PS0402V014AT

#### Recommended Reflow Soldering Profile:

Profile Feature	Pb-Free Assembly
<b>Preheat/Soak</b>	
Temperature Min ( $T_{smin}$ )	150°C
Temperature Max ( $T_{smax}$ )	200°C
Time ( $t_s$ ) from ( $T_{smin}$ to $T_{smax}$ )	60~120 seconds
Ramp-up rate ( $T_L$ to $T_p$ )	3°C/second max.
Liquidous temperature ( $T_L$ ) Time ( $t_L$ ) maintained above $T_L$	217°C 60~150 seconds
Peak package body temperature ( $T_p$ )	260°C
Time ( $t_p$ )* within 5°C of the specified classification temperature ( $T_c$ )	30 seconds *
Ramp-down rate ( $T_p$ to $T_L$ )	6°C/second max.
Time 25°C to peak temperature	8 minutes max.
* Tolerance for peak profile temperature ( $T_p$ ) is defined as a supplier minimum and a user maximum	

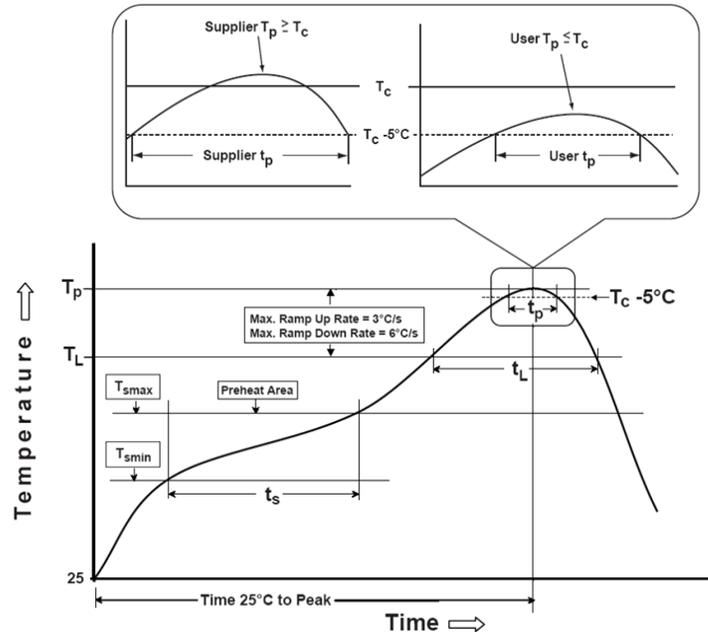

#### Recommended conditions for hand soldering:

- Appropriate temperature (max.) of soldering iron tip/soldering time (max.): 280°C/10s or 350°C/ 3s. Using hot air rework station with tip that can melt the solder on both terminations at the same time is strongly recommended. Do not directly contact the chip termination with the tip of soldering iron.

#### Storage Condition With Package:

- The maximum ambient temperature shall not exceed 35°C. Storage temperature higher than 35°C could result in the deformation of packaging materials.
- The maximum relative humidity recommended for storage is 75%. High humidity with high temperature could accelerate the oxidation of the solder plating on the termination and reduce the solderability of the components.
- Sealed plastic bags with desiccant shall be used to reduce the oxidation of the termination and shall only be opened prior to use.
- The products shall not be stored in areas where harmful gases containing sulfur or chlorine are present.

# Surface Mount ESD Suppressors

## Surface Mount ESD Suppressor Array, EC1004L4V012AT




### Features:

- Extremely quick response time (<1ns) present ideal ESD protection
- Extremely low capacitance (0.1pF typical)
- Extremely low leakage current (0.01 $\mu$ A)
- Zero signal distortion
- SMD (Surface Mount Device)
- Protection against ESD voltages and currents (IEC61000-4 -2 Level 4)
- Lead free, RoHS Compliance
- Operating temperature -55°C ~ +125°C
- Storage temperature range -55°C ~ +125°C

### Application:


- Antenna circuit
- DVI
- USB2.0/3.0
- HDMI1.3/1.4
- IEEE-1394

### Recommended Foot Print Dimensions:

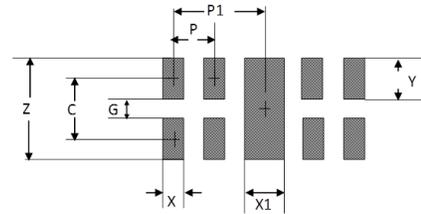

Unit	Inch	mm
Y	0.024	0.6
G	0.008	0.2
Z	0.055	1.4
X	0.008	0.2
XL	0.012	0.3
P	0.020	0.5
P1	0.039	1.0
C	0.031	0.8


### Shape and Dimensions:

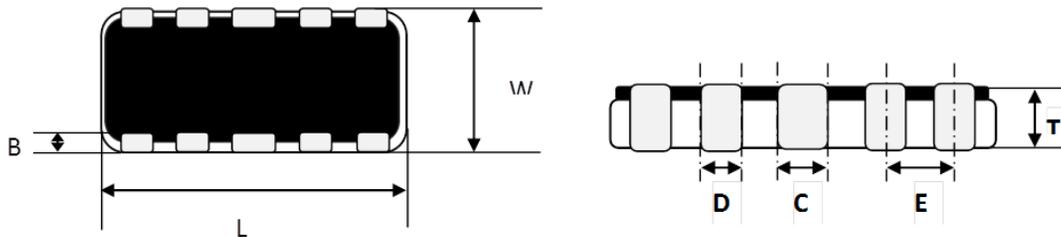

Size Inch/(mm)	L	W	T	B	C	D	E
<b>1004</b> <b>(2510)</b>	0.098±0.004 (2.5±0.1)	0.039±0.004 (1.0±0.1)	0.020±0.004 (0.5±0.1)	0.008±0.004 (0.2±0.1)	0.012±0.002 (0.3±0.05)	0.008±0.002 (0.2±0.05)	0.020±0.002 (0.5±0.05)

### Circuit Symbol:

Pin	Description
1,2,4,5	Data Lines
6,7,9,10	Data Lines (No Internal Connection)
3,8	Ground

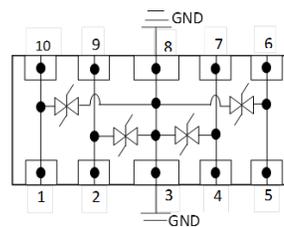

### Packaging Information:

Package	Tape & Reel Quantity (piece)
<b>1004 (2510)</b>	5,000

### Storage Conditions:

Storage Time: 12 months max  
 Storage Temperature : 5°C to 30°C  
 Relative Humidity: < 60% RH

# Surface Mount ESD Suppressors

## Surface Mount ESD Suppressor Array, EC1004L4V012AT

### Electrical Characteristics (@25°C):

Characteristic	Value
IEC61000-4-2 Direct Discharge IEC61000-4-2 Air Discharge	Level 4 - 10 kV Level 4 - 15 kV
Trigger Voltage	300 V typical (measured per IEC61000-4-2, 8kV Direct Discharge)
Clamping Voltage	30 V typical (measured per IEC61000-4-2, 8kV Direct Discharge)
Response Time	Less than 1 ns
Capacitance @ f = 1MHz	0.1 pF typical
Leakage Current @ 12 V <sub>DC</sub>	0.01 μA max.
Rated Voltage	12 V <sub>DC</sub> max.
ESD Pulse Withstand	1000 Pulses typical

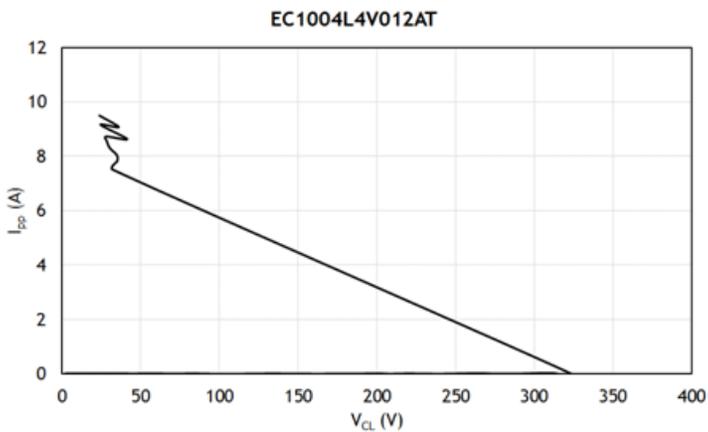


Fig. 1  
Dynamic resistance with positive clamping voltage  
 $t_p = 100\text{ns}$ ; Transmission Line Pulse (TLP)

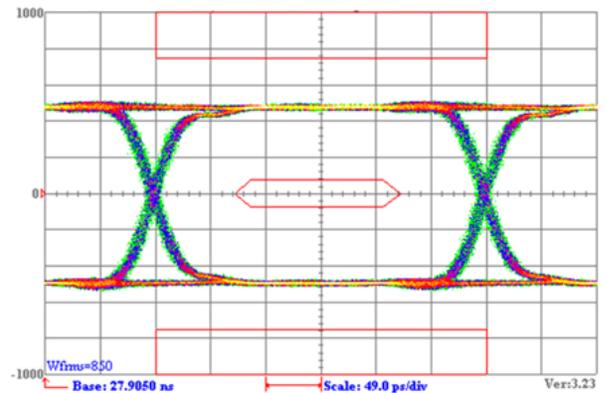


Fig. 1  
Eye Diagram (HDMI 1.3)


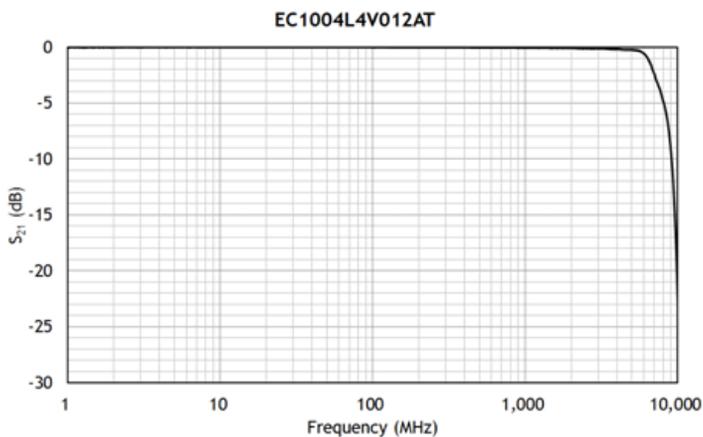


Fig. 3 Insertion loss; typical value



# Surface Mount ESD Suppressors

## Surface Mount ESD Suppressor Array, EC1004L4V012AT

### Representative Test Waveform Per IEC61000-4-2 Level 4, 8kv Direct Discharge:

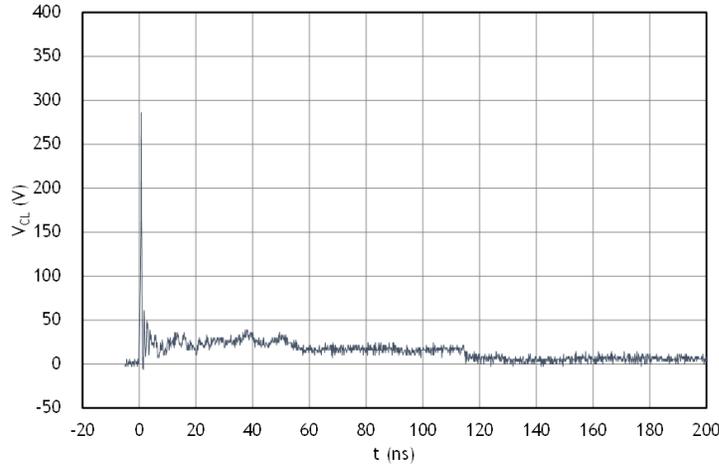


### HDMI Interface Application:

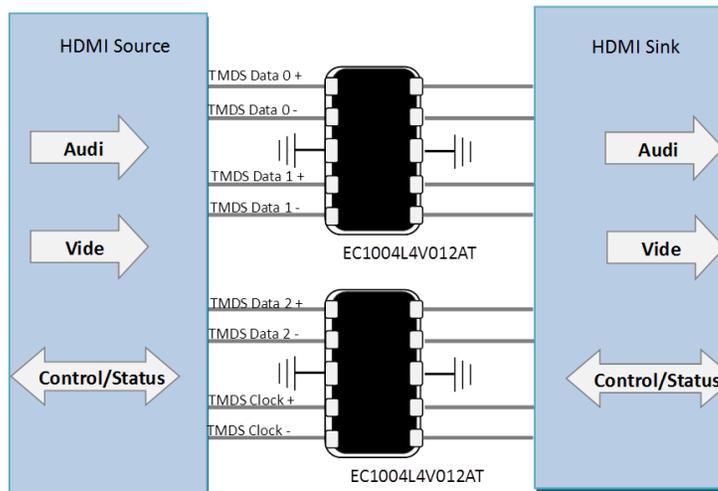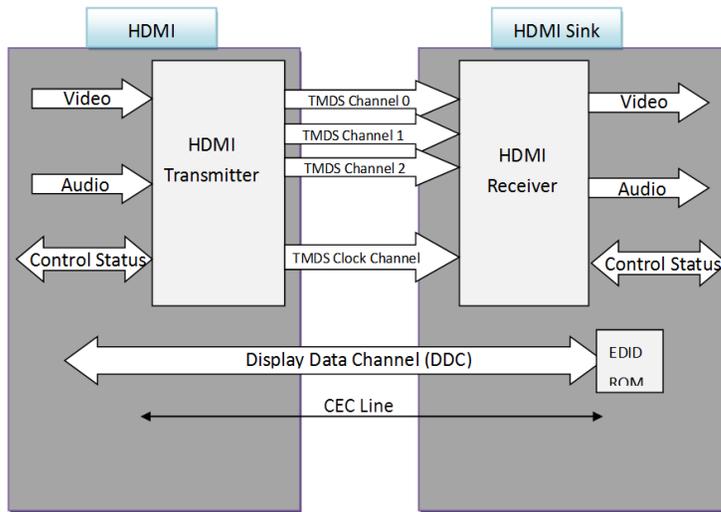

## Surface Mount ESD Suppressors

### ESD Protection Diode, TS02011C05V3R0

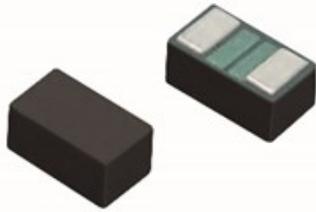


#### Application:

- Cellular handsets and accessories
- Portable electronics
- Computers and peripherals
- Communication systems
- Audio and video equipment


#### Features:

- Bi-directional ESD protection of one line
- Low capacitance (3 pF typical)
- IEC 61000-4-2, level 4 (ESD) protection
- Ultra small SMD special package (0201)
- Pb-Free, Halogen free/BFR free and RoHS compliant
- Operating temperature range  $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$
- Storage temperature range  $-55^{\circ}\text{C}\sim+125^{\circ}\text{C}$

#### Recommended Foot Print Dimensions:

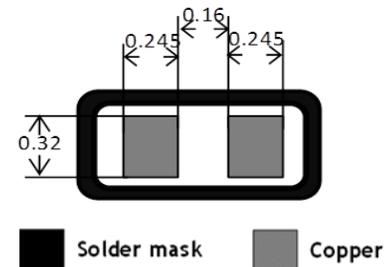

#### Shape and Dimensions:

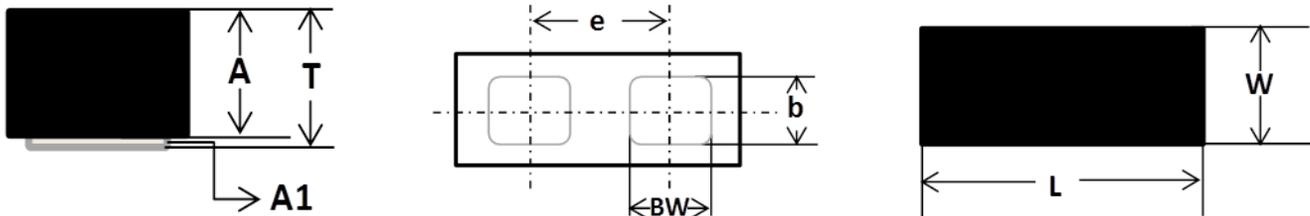

Package	Size inch/(mm)							
	L	W	T	BW	b	e	A	A1
<b>0201</b> <b>(DFN0603)</b>	0.024±0.002 (0.60±0.05)	0.012±0.002 (0.30±0.05)	0.010±0.002 (0.265±0.05)	0.006±0.002 (0.15±0.05)	0.009±0.002 (0.24±0.05)	0.016 (0.40)	0.010±0.002 (0.26±0.05)	0.0002 (0.005)

#### Packaging Information:

Package	Tape & Reel Quantity (piece)
<b>0201 (DFN0603)</b>	15,000

#### Storage Conditions:

Storage Time: 12 months max  
 Storage Temperature :  $5^{\circ}\text{C}$  to  $30^{\circ}\text{C}$   
 Relative Humidity: < 60% RH

# Surface Mount ESD Suppressors

## ESD Protection Diode, TS02011C05V3R0

### Electrical Characteristics (@25°C):

Characteristic	Condition	Value		
		Min.	Typical	Max.
ESD per IEC61000-4-2 Direct Discharge			±8 kV	
ESD per IEC61000-4-2 Air Discharge			±15 kV	
Reverse Stand-Off Voltage ( $V_{RWM}$ )			5 V	
Reverse Breakdown Voltage ( $V_{BV}$ )	$I_{BV} = 1\text{mA}$		10 V	
Clamping Voltage ( $V_{CL}$ )	$I_{PP} = 1\text{A}$ , $t_P = 8/20\mu\text{s}$		14 V	
Junction Capacitance ( $C_J$ )	$V_{RWM} = 0\text{V}$ , $f = 1\text{MHz}$		3 pF	
Reverse Leakage Current ( $I_{RM}$ )	$V_{RWM} = 5\text{V}$			1 $\mu\text{A}$

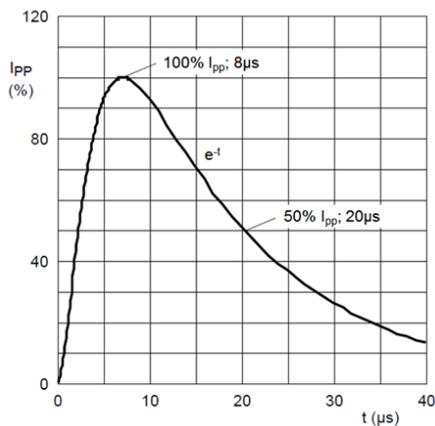


Fig. 1  
8/20 $\mu\text{s}$  pulse waveform  
according to IEC 61000-4-5

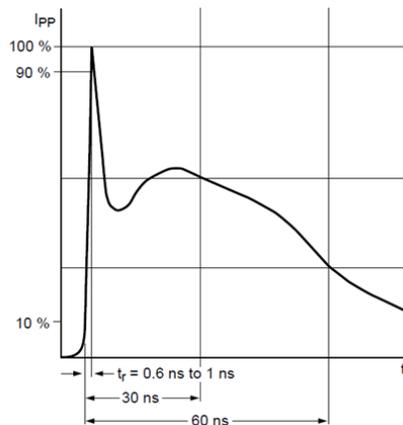


Fig. 2  
ESD pulse waveform  
according to IEC 61000-4-5



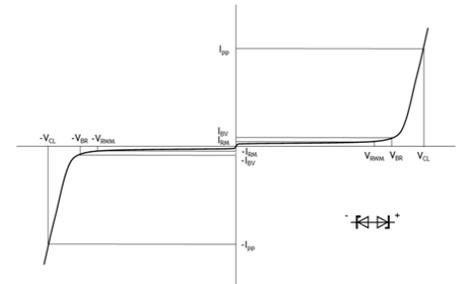



Fig. 3  
V-I characteristics for bidirectional ESD  
protection diode

### Clamped Pulse Waveform per IEC61000-4-2 Level 4, ±8kv Direct Discharge:

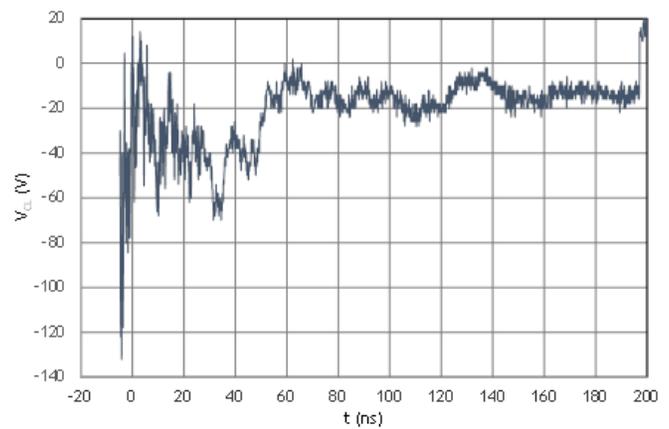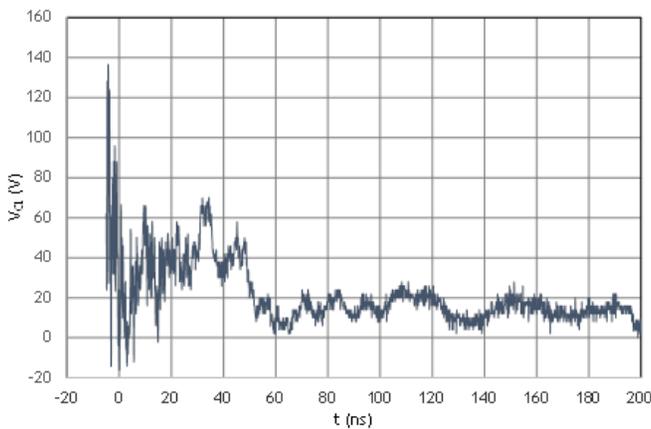

## Surface Mount ESD Suppressors

### ESD Protection Diode, TS04021C05V100

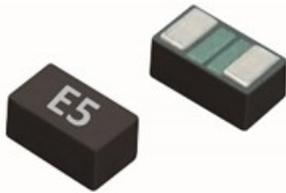


#### Application:

- Cellular handsets and accessories
- Portable electronics
- Computers and peripherals
- Communication systems
- Audio and video equipment

#### Features:




- Bi-directional ESD protection of one line.
- IEC 61000-4-2, level 4 (ESD) protection
- Ultra small SMD special packages (0402)
- Pb-Free, Halogen free and RoHS compliant
- Operating junction temperature  $-55^{\circ}\text{C}\sim+125^{\circ}\text{C}$
- Storage temperature range  $-55^{\circ}\text{C}\sim+150^{\circ}\text{C}$

#### Recommended Foot Print Dimensions:

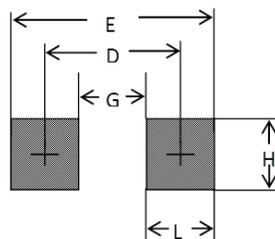

Unit	Inch	mm
L	0.020	0.50
G	0.010	0.25
H	0.028	0.70
D	0.030	0.75
E	0.049	1.25

#### Shape and Dimensions:

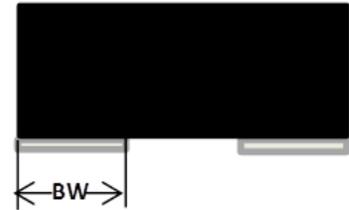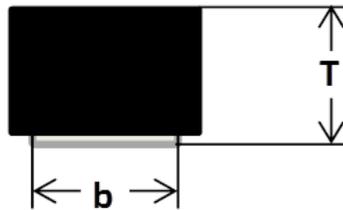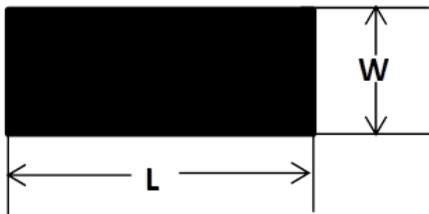

Package	Size Inch/(mm)				
	L	W	T	BW	b
<b>0402 (DFN1006)</b>	0.039±0.002 (1.00±0.05)	0.024±0.002 (0.60±0.05)	0.020±0.002 (0.50±0.05)	0.014 (0.35)	0.020 (0.50)

#### Packaging Information:

Package	Tape & Reel Quantity (piece)	Marking
<b>0402 (DFN1006)</b>	10,000	E5

#### Storage Conditions:

Storage Time: 12 months max  
 Storage Temperature :  $5^{\circ}\text{C}$  to  $30^{\circ}\text{C}$   
 Relative Humidity: < 60% RH

# Surface Mount ESD Suppressors

## ESD Protection Diode, TS04021C05V100

### Electrical Characteristics (@25°C):

Characteristic	Condition	Value		
		Min.	Typical	Max.
ESD per IEC61000-4-2 Direct Discharge			±8 kV	
ESD per IEC61000-4-2 Air Discharge			±16 kV	
Peak Pulse Power ( $P_{PK}$ )	$t_P = 8/20\mu s$		75 W	
Maximum Peak Pulse Current ( $I_{PP}$ )	$t_P = 8/20\mu s$		5 A	
Reverse Stand-Off Voltage ( $V_{RWM}$ )				5 V
Reverse Breakdown Voltage ( $V_{BV}$ )	$I_{BV} = 1mA$	6 V		
Clamping Voltage ( $V_{CL}$ )	$I_{PP} = 1A, t_P = 8/20\mu s$			9 V
	$I_{PP} = 5A, t_P = 8/20\mu s$			15 V
Junction Capacitance ( $C_J$ )	$V_{RWM} = 0V, f = 1MHz$		10 pF	
Reverse Leakage Current ( $I_{RM}$ )	$V_{RWM} = 5V$			2 $\mu A$

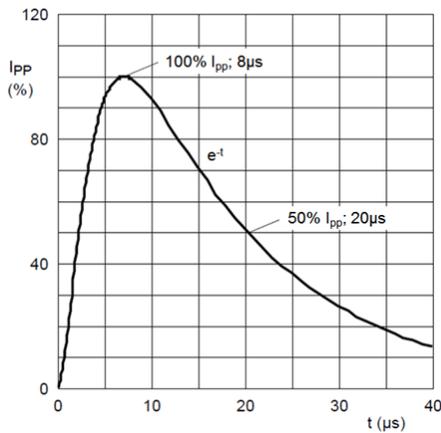


Fig. 1  
8/20 $\mu s$  pulse waveform  
according to IEC 61000-4-5

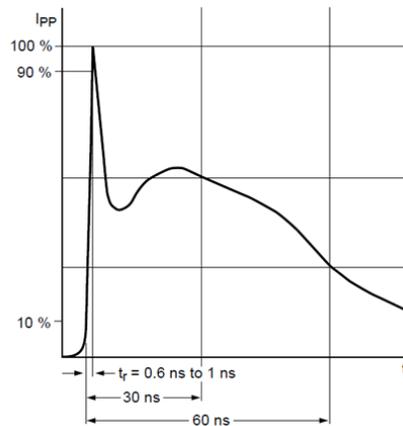


Fig. 2  
ESD pulse waveform  
according to IEC 61000-4-2

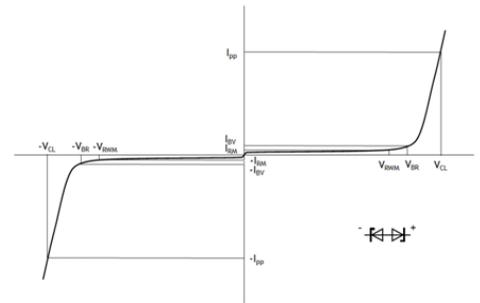


Fig. 3  
V-I characteristics for bidirectional ESD  
protection diode

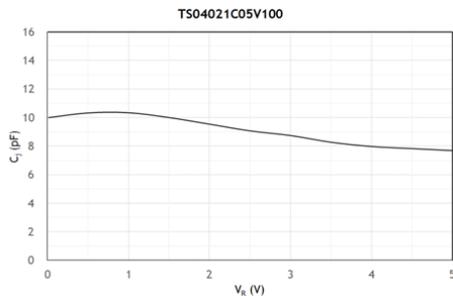


Fig. 4  
Junction capacitance as a function of  
reverse voltage; typical value

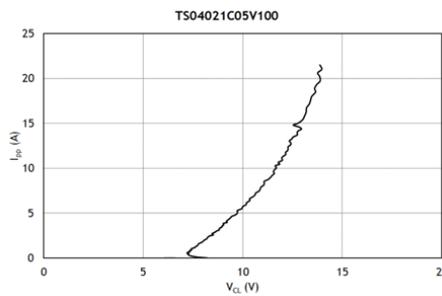


Fig. 5  
Dynamic resistance with positive  
clamping voltage  $t_P = 10ns$ ;  
Transmission Line Pulse (TLP)


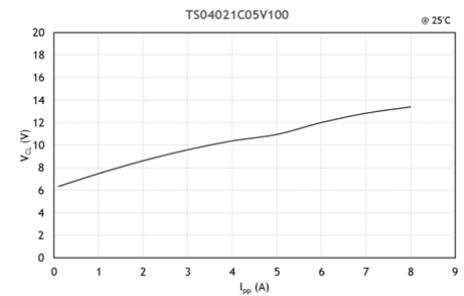


Fig. 6  
Clamping voltage ( $V_{CL}$ ) as a function of  
peak current ( $I_{PP}$ );  $t_P = 8/20\mu s$

## Surface Mount ESD Suppressors

### Ultra Low Capacitance ESD Protection Diode, TS04021C05VR30

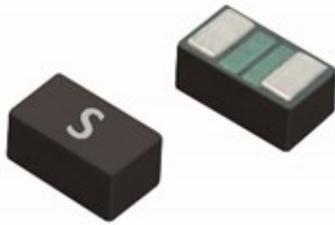


#### Application:

- Cellular handsets and accessories
- Portable electronics
- Notebooks, desktops and servers
- HDMI1.3/1.4, PCI express, SATA, USB 2.0, DVI, display port
- High-speed data lines

#### Features:




- Bi-directional ESD protection of one line.
- IEC 61000-4-2, level 4 (ESD) protection
- IEC61000-4-4 (EFT) rating - 40A (5/50 $\mu$ s)
- IEC61000-4-5 (Lightning) rating - 24A (8/20 $\mu$ s)
- Low capacitance (0.3pF typical)
- Ultra small SMD special packages (0402)
- Pb-Free, Halogen free and RoHS compliant
- Operating junction temperature -55°C~+125°C
- Storage temperature range -55°C~+150°C

#### Recommended Foot Print Dimensions:

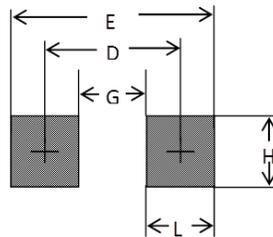

Unit	Inch	mm
L	0.020	0.50
G	0.010	0.25
H	0.028	0.70
D	0.030	0.75
E	0.049	1.25

#### Shape and Dimensions:

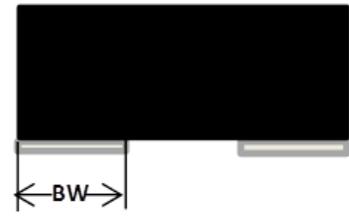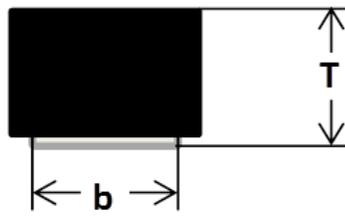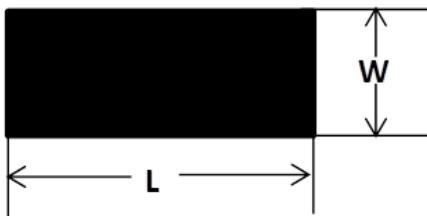

Package	Size Inch/(mm)				
	L	W	T	BW	b
<b>0402</b> <b>(DFN1006)</b>	0.039±0.002 (1.00±0.05)	0.024±0.002 (0.60±0.05)	0.020±0.002 (0.50±0.05)	0.014 (0.35)	0.020 (0.50)

#### Packaging Information:

Package	Tape & Reel Quantity (piece)	Marking
<b>0402 (DFN1006)</b>	10,000	S

#### Storage Conditions:

Storage Time: 12 months max  
 Storage Temperature : 5°C to 30°C  
 Relative Humidity: < 60% RH

# Surface Mount ESD Suppressors

## Ultra Low Capacitance ESD Protection Diode, TS04021C05VR30

### Electrical Characteristics (@25°C):

Characteristic	Condition	Value		
		Min.	Typical	Max.
ESD per IEC61000-4-2 Direct Discharge			±8 kV	
ESD per IEC61000-4-2 Air Discharge			±16 kV	
Peak Pulse Power ( $P_{PK}$ )	$t_p = 8/20\mu s$		30 W	
Reverse Stand-Off Voltage ( $V_{RWM}$ )				5 V
Reverse Breakdown Voltage ( $V_{BV}$ )	$I_{BV} = 1mA$	6.0 V	7.8 V	
Clamping Voltage ( $V_{CL}$ )	$I_{PP} = 1A, t_p = 8/20\mu s$			14 V
Junction Capacitance ( $C_j$ )	$V_{RWM} = 0V, f = 1MHz$		0.3 pF	
Reverse Leakage Current ( $I_{RM}$ )	$V_{RWM} = 5V$			1 $\mu A$

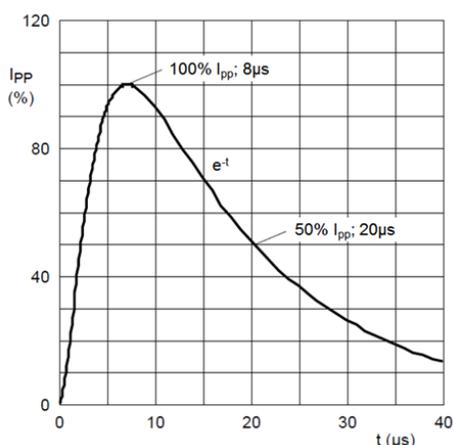


Fig. 1  
8/20 $\mu s$  pulse waveform  
according to IEC 61000-4-5

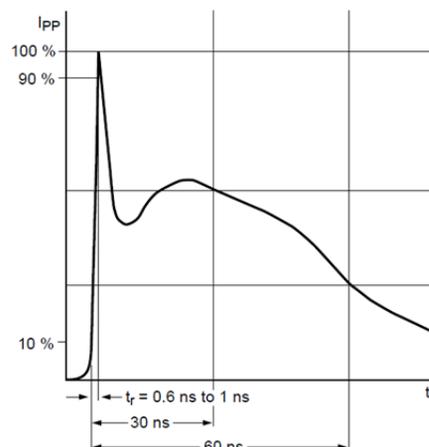


Fig. 2  
ESD pulse waveform  
according to IEC 61000-4-2

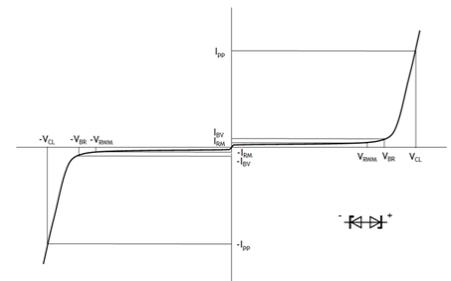


Fig. 3  
V-I characteristics for bidirectional ESD  
protection diode

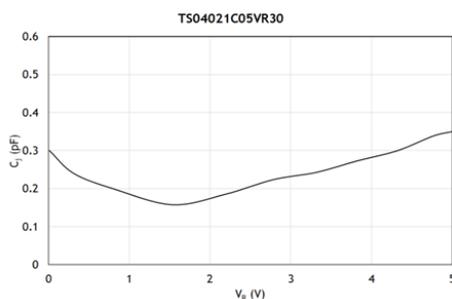


Fig. 4  
Junction capacitance as a function of  
reverse voltage; typical value

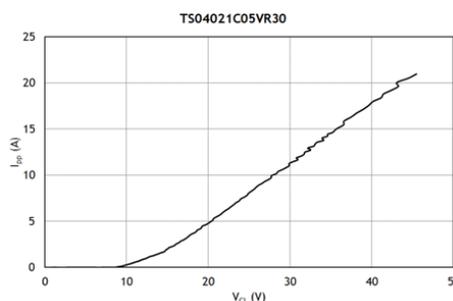


Fig. 5  
Dynamic resistance with positive  
clamping voltage  $t_p = 10ns$ ;  
Transmission Line Pulse (TLP)


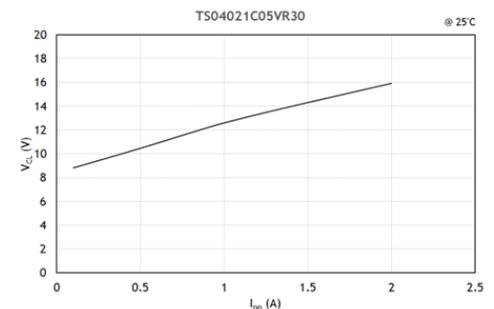


Fig. 6  
Clamping voltage ( $V_{CL}$ ) as a function of  
peak current ( $I_{PP}$ );  $t_p = 8/20\mu s$

## Surface Mount ESD Suppressors

### Recommended Reflow Soldering Profile:

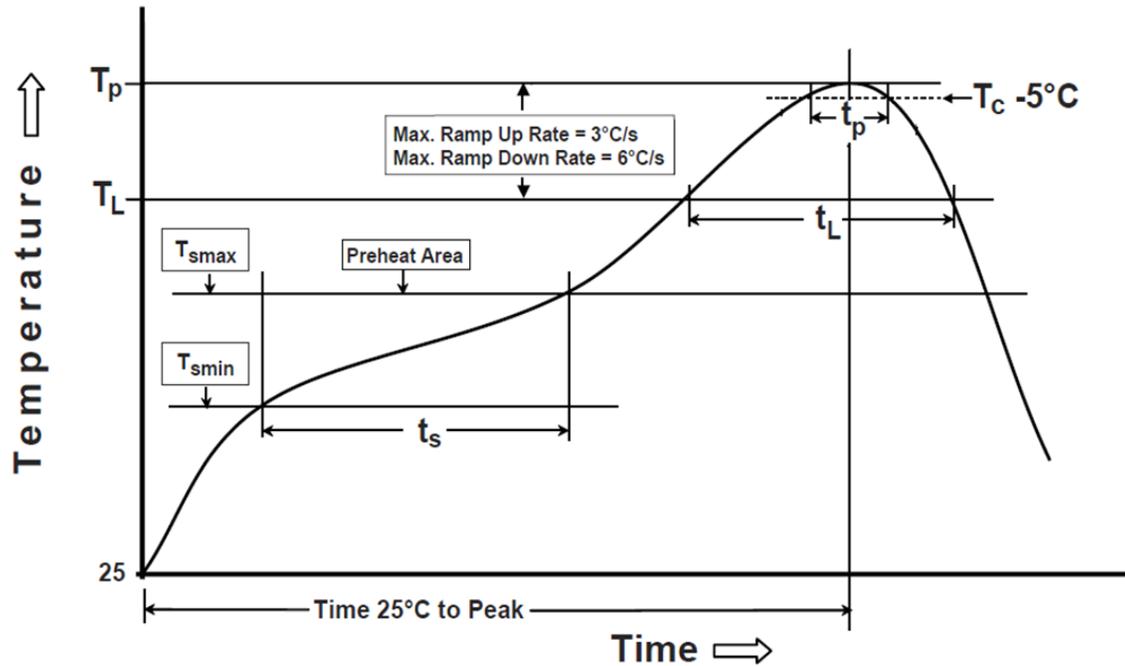

Profile Feature	Pb-Free Assembly
<b>Preheat/Soak</b> Temperature Min ( $T_{smin}$ ) Temperature Max ( $T_{smax}$ ) Time ( $t_s$ ) from ( $T_{smin}$ to $T_{smax}$ )	150°C 200°C 60~120 seconds
Ramp-uprate ( $T_L$ to $T_p$ )	3°C/second max.
Liquidous temperature ( $T_L$ ) Time ( $t_L$ ) maintained above $T_L$	217°C 60~150 seconds
Peak package body temperature ( $T_p$ )	260°C
Time ( $t_p$ )*within 5°C of the specified classification temperature ( $T_c$ )	30 seconds *
Ramp-down rate ( $T_p$ to $T_L$ )	6°C/second max.
Time 25°C to peak temperature	8 minutes max.
* Tolerance for peak profile temperature ( $T_p$ ) is defined as a supplier minimum and a user maximum	

### Recommended Conditions for Hand Soldering:

1. Appropriate temperature (max.) of soldering iron tip/soldering time (max.): 280°C/10s or 350°C/ 3s.
2. Using hot air rework station with tip that can melt the solder on both terminations at the same time is strongly recommended. Do not directly contact the chip termination with the tip of soldering iron

## Surface Mount Polymer PTCs

### PMS Series, 0603 Size


#### Features:

- Resettable over-current protection
- Small size of 0603
- Fast time-to-trip
- RoHS compliant
- Halogen free



#### Shape and Dimensions:

Part Number	L (mm) Max.	W (mm) Max.	H (mm) Max.	D (mm) Min.
PMS0603-005	1.85	1.05	1.00	0.15
PMS0603-010	1.85	1.05	1.00	0.15
PMS0603-020	1.85	1.05	1.00	0.15
PMS0603-025	1.85	1.05	1.00	0.15
PMS0603-035	1.85	1.05	1.00	0.15
PMS0603-050	1.85	1.05	1.10	0.15
PMS0603-075	1.85	1.05	1.10	0.15



#### Application Fields:

- Battery packs
- Portable electronic devices
- Industrial controls
- Multimedia
- Game machines
- Telecom & broadband instruments

#### Agency Approval:

Recognized Under the Components Program of Underwriters Laboratories. File Number: E355716.

#### Typical Ratings and Characteristics (@25°C):

Operating Temperature: -40 to +85°C

Part Number	Current (A)		$V_{Max}$ (Vdc)	$I_{Max}$ (A)	Max. Time to Trip (sec)		Typical Power (Pd, W)	Resistance Min. (Ω)	One Hours Post Reflow Resistance $R_1$ Max. (Ω) <sup>1</sup>	UL Certification
	Hold ( $I_H$ )	Trip ( $I_T$ )			Current (A)	Time (sec)				
PMS0603-005	0.05	0.20	15	40	0.5	1.00	0.50	2.000	10.000	
PMS0603-010	0.10	0.30	15	40	0.5	1.00	0.50	0.900	6.000	
PMS0603-020	0.20	0.50	9	40	1.0	0.60	0.50	0.550	3.500	✓
PMS0603-025	0.25	0.55	9	40	8.0	0.08	0.50	0.550	3.000	✓
PMS0603-035	0.35	0.75	6	40	8.0	0.10	0.50	0.200	1.400	✓
PMS0603-050	0.50	1.00	6	40	8.0	0.10	0.50	0.100	0.800	✓
PMS0603-075	0.75	1.40	6	40	8.0	0.10	0.50	0.060	0.450	✓

<sup>1</sup> The max resistance of one-hour post reflow is a reference value. The value may change a little according to reflow conditions and soldering state.

## Surface Mount Polymer PTCs

### PMS Series, 0603 Size


#### Thermal De-rating Hold Current (A) at Ambient Temperature (25 °C):

Part Number	Ambient Temperature								
	-40°C	-20°C	0°C	25°C	40°C	50°C	60°C	70°C	85°C
<b>PMS0603-005</b>	0.072	0.065	0.058	0.05	0.041	0.037	0.033	0.030	0.024
<b>PMS0603-010</b>	0.13	0.12	0.11	0.10	0.08	0.07	0.06	0.05	0.03
<b>PMS0603-020</b>	0.27	0.25	0.23	0.20	0.17	0.14	0.12	0.10	0.07
<b>PMS0603-025</b>	0.32	0.29	0.27	0.25	0.21	0.18	0.16	0.13	0.09
<b>PMS0603-035</b>	0.47	0.41	0.38	0.35	0.29	0.26	0.24	0.20	0.14
<b>PMS0603-050</b>	0.67	0.59	0.54	0.50	0.41	0.37	0.34	0.29	0.20
<b>PMS0603-075</b>	0.98	0.85	0.81	0.75	0.60	0.54	0.44	0.40	0.31

#### Packaging and Marking Information:

Part Number	Part Marking	Tape & Reel Quantity (piece)
<b>PMS0603-005</b>	V	5,000
<b>PMS0603-010</b>	1	
<b>PMS0603-020</b>	2	
<b>PMS0603-025</b>	2	
<b>PMS0603-035</b>	3	
<b>PMS0603-050</b>	5	
<b>PMS0603-075</b>	7	

#### Typical Time to Trip (@25°C):

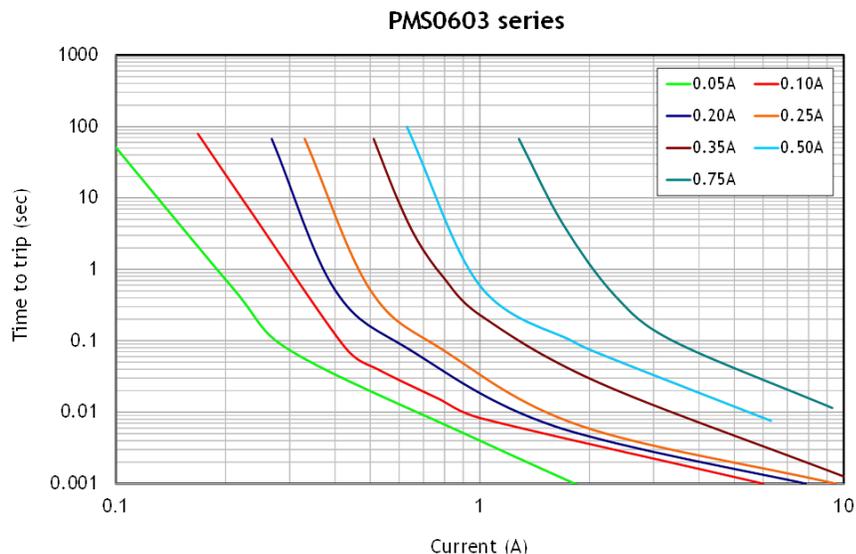

## Surface Mount Polymer PTCs

### PMS Series, 0805 Size



#### Features:

- Resettable over-current protection
- Small size of 0805
- Fast time-to-trip
- RoHS compliant
- Halogen free

#### Application Fields:


- Battery packs
- Portable electronic devices
- Industrial controls
- Multimedia
- Game machines
- Telecom & broadband instruments

#### Agency Approval:

Recognized Under the Components Program of Underwriters Laboratories. File Number: E355716.

#### Shape and Dimensions:

Part Number	L (mm) Max.	W (mm) Max.	H (mm) Max.	D (mm) Min.	E (mm) Min.
PMS0805-010	2.20	1.50	1.00	0.20	0.10
PMS0805-020	2.20	1.50	1.00	0.20	0.10
PMS0805-025	2.20	1.50	1.00	0.20	0.10
PMS0805-035	2.20	1.50	1.00	0.20	0.10
PMS0805-050	2.20	1.50	0.60	0.20	0.10
PMS0805-075	2.20	1.50	1.10	0.20	0.10
PMS0805-100	2.20	1.50	1.10	0.20	0.10
PMS0805-110	2.20	1.50	1.10	0.20	0.10
PMS0805-125	2.20	1.50	1.20	0.20	0.10

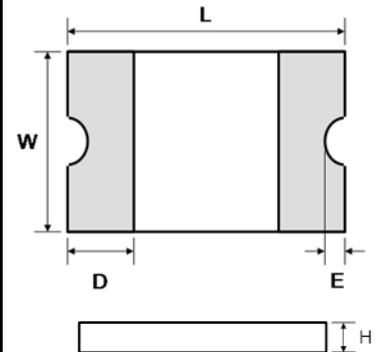

## Surface Mount Polymer PTCs

### PMS Series, 0805 Size

#### Typical Ratings and Characteristics (@25°C):

Operating Temperature: -40 to +85°C

Part Number	Current (A)		V <sub>Max</sub> (Vdc)	I <sub>Max</sub> (A)	Max. Time to Trip (sec)		Typical Power (Pd, W)	Resista nce Min. (Ω)	One Hours Post Reflow Resistance R <sub>1</sub> Max. (Ω) <sup>1</sup>	UL Certification
	Hold (I <sub>H</sub> )	Trip (I <sub>T</sub> )			Current (A)	Time (sec)				
PMS0805-010	0.10	0.30	15	100	0.5	1.50	0.50	1.000	6.000	
PMS0805-020	0.20	0.50	9	100	8.0	0.02	0.50	0.650	3.500	✓
PMS0805-025	0.25	0.55	9	100	8.0	0.02	0.50	0.600	3.000	
PMS0805-035	0.35	0.75	6	100	8.0	0.10	0.50	0.250	1.200	✓
PMS0805-050	0.50	1.00	6	100	8.0	0.10	0.50	0.150	0.850	✓
PMS0805-075	0.75	1.50	6	40	8.0	0.20	0.60	0.090	0.385	✓
PMS0805-100	1.00	1.95	6	100	8.0	0.30	0.60	0.060	0.230	✓
PMS0805-110	1.10	2.20	6	100	8.0	0.30	0.60	0.060	0.210	✓
PMS0805-125	1.25	2.50	6	100	8.0	0.60	1.50	0.030	0.140	

<sup>1</sup> The max resistance of one-hour post reflow is a reference value. The value may change a little according to reflow conditions and soldering state.

#### Thermal De-rating Hold Current (A) at Ambient Temperature (25 °C):

Part Number	Ambient Temperature								
	-40°C	-20°C	0°C	25°C	40°C	50°C	60°C	70°C	85°C
PMS0805-010	0.14	0.12	0.11	0.10	0.08	0.07	0.06	0.05	0.03
PMS0805-020	0.28	0.25	0.23	0.20	0.17	0.14	0.12	0.10	0.07
PMS0805-025	0.35	0.31	0.27	0.25	0.22	0.19	0.16	0.14	0.11
PMS0805-035	0.47	0.44	0.39	0.35	0.30	0.27	0.24	0.20	0.14
PMS0805-050	0.68	0.62	0.55	0.50	0.40	0.37	0.33	0.29	0.23
PMS0805-075	1.00	0.90	0.79	0.75	0.63	0.57	0.53	0.41	0.34
PMS0805-100	1.35	1.25	1.15	1.00	0.82	0.74	0.65	0.55	0.42
PMS0805-110	1.45	1.35	1.20	1.10	0.92	0.84	0.75	0.65	0.52
PMS0805-125	1.65	1.53	1.36	1.25	1.05	0.95	0.85	0.74	0.59


## Surface Mount Polymer PTCs

### PMS Series, 0805 Size

#### Packaging and Marking Information:

Part Number	Part Marking	Tape & Reel Quantity (piece)
PMS0805-010	1	5,000
PMS0805-020	2	
PMS0805-025	2	
PMS0805-035	3	
PMS0805-050	5	
PMS0805-075	7	4,000
PMS0805-100	0	
PMS0805-110	0	
PMS0805-125	12	

#### Typical Time to Trip (@25°C):

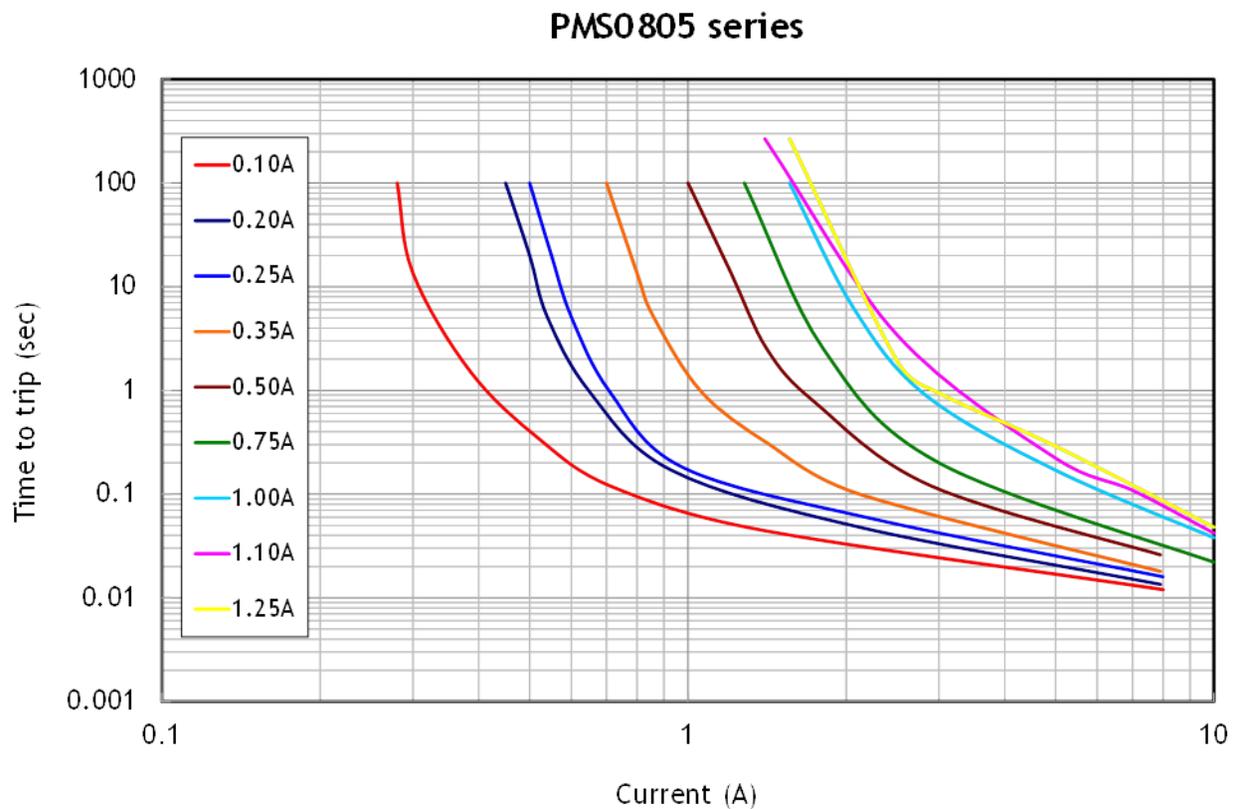

## Surface Mount Polymer PTCs

### PMS Series, 1206 Size



#### Features:

- Resettable over-current protection
- Small size of 1206
- Fast time-to-trip
- RoHS compliant
- Halogen free

#### Application Fields:


- Battery packs
- Portable electronic devices
- Industrial controls
- Multimedia
- Game machines
- Telecom & broadband instruments

#### Agency Approval:

Recognized Under the Components Program of Underwriters Laboratories. File Number: E355716.

#### Shape and Dimensions:

Part Number	L (mm) Max.	W (mm) Max.	H (mm) Max.	D (mm) Min.	E (mm) Min.
PMS1206-005	3.50	1.80	1.10	0.15	0.10
PMS1206-010	3.50	1.80	1.10	0.15	0.10
PMS1206-012	3.50	1.80	1.10	0.15	0.10
PMS1206-020	3.50	1.80	0.90	0.15	0.10
PMS1206-025	3.50	1.80	0.90	0.15	0.10
PMS1206-035	3.50	1.80	0.90	0.15	0.10
PMS1206-050	3.50	1.80	0.85	0.15	0.10
PMS1206-075	3.50	1.80	0.80	0.15	0.10
PMS1206-100	3.50	1.80	0.80	0.15	0.10
PMS1206-110	3.50	1.80	0.80	0.15	0.10
PMS1206-150	3.50	1.80	1.20	0.15	0.10
PMS1206-200	3.50	1.80	1.20	0.15	0.10

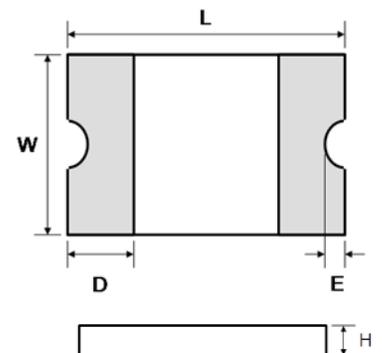

## Surface Mount Polymer PTCs

### PMS Series, 1206 Size

#### Typical Ratings and Characteristics (@25°C):

Operating Temperature: -40 to +85°C

Part Number	Current (A)		$V_{Max}$ (Vdc)	$I_{Max}$ (A)	Max. Time to Trip (sec)		Typical Power (Pd, W)	Resistance Min. ( $\Omega$ )	One Hours Post Reflow Resistance $R_1$ Max. ( $\Omega$ ) <sup>1</sup>	UL Certification
	Hold ( $I_H$ )	Trip ( $I_T$ )			Current (A)	Time (sec)				
PMS1206-005	0.05	0.15	60	100	0.25	1.50	0.4	3.60	50.00	
PMS1206-010	0.10	0.25	60	100	0.5	1.00	0.4	1.60	15.00	
PMS1206-012	0.12	0.29	60	100	0.5	1.00	0.4	1.60	15.00	
PMS1206-020	0.20	0.40	30	100	8.0	0.08	0.6	0.35	2.500	
PMS1206-025	0.25	0.50	16	100	8.0	0.08	0.6	0.35	2.500	√
PMS1206-035	0.35	0.75	6	100	8.0	0.10	0.6	0.25	1.300	√
PMS1206-050	0.50	1.00	6	100	8.0	0.10	0.6	0.15	0.700	√
PMS1206-075	0.75	1.50	6	100	8.0	0.20	0.6	0.090	0.500	√
PMS1206-100	1.00	1.80	6	100	8.0	0.30	0.6	0.055	0.270	√
PMS1206-110	1.10	2.20	6	100	8.0	0.30	0.6	0.050	0.250	√
PMS1206-150	1.50	3.00	6	100	8.0	1.00	0.8	0.040	0.130	√
PMS1206-200	2.00	3.50	6	100	8.0	1.50	0.8	0.018	0.080	

<sup>1</sup> The max resistance of one-hour post reflow is a reference value. The value may change a little according to reflow conditions and soldering state.

## Surface Mount Polymer PTCs

### PMS Series, 1206 Size

#### Packaging and Marking Information:

Part Number	Part Marking	Tape & Reel Quantity (piece)
PMS1206-005	αZ	5,000
PMS1206-010	αN	
PMS1206-012	αN	
PMS1206-020	αA	
PMS1206-025	αA	
PMS1206-035	αB	
PMS1206-050	αF	
PMS1206-075	αG	
PMS1206-100	αH	
PMS1206-110	αH	
PMS1206-150	αI	3,500
PMS1206-200	αK	
PMS0805-125	12	


#### Thermal De-rating Hold Current (A) at Ambient Temperature (25 °C):

Part Number	Ambient Temperature								
	-40°C	-20°C	0°C	25°C	40°C	50°C	60°C	70°C	85°C
PMS1206-005	0.074	0.066	0.058	0.050	0.0425	0.038	0.035	0.030	0.0275
PMS1206-010	0.15	0.13	0.12	0.10	0.085	0.075	0.07	0.06	0.055
PMS1206-012	0.18	0.16	0.14	0.12	0.10	0.09	0.08	0.07	0.065
PMS1206-020	0.30	0.26	0.23	0.20	0.17	0.15	0.14	0.12	0.11
PMS1206-025	0.37	0.33	0.29	0.25	0.22	0.20	0.17	0.15	0.12
PMS1206-035	0.50	0.45	0.40	0.35	0.30	0.27	0.24	0.21	0.15
PMS1206-050	0.71	0.64	0.57	0.50	0.42	0.39	0.35	0.31	0.25
PMS1206-075	1.14	1.01	0.88	0.75	0.65	0.59	0.54	0.49	0.41
PMS1206-100	1.45	1.31	1.15	1.00	0.84	0.77	0.69	0.61	0.48
PMS1206-110	1.60	1.45	1.30	1.10	0.95	0.80	0.72	0.66	0.55
PMS1206-150	2.18	1.94	1.72	1.50	1.28	1.17	1.06	0.96	0.77
PMS1206-200	2.88	2.63	2.34	2.00	1.74	1.58	1.42	1.17	0.93

# Surface Mount Polymer PTCs

## PMS Series, 1206 Size

Typical Time to Trip (@25°C):

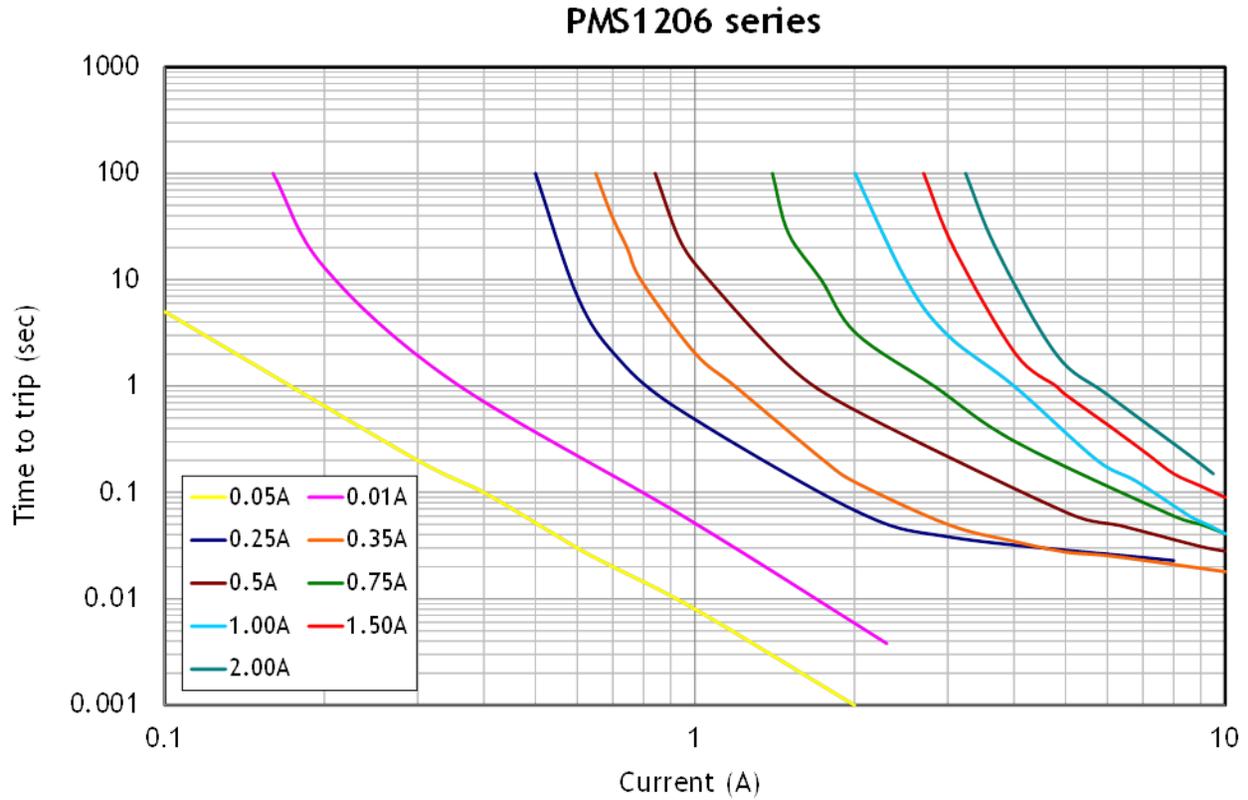

## Surface Mount Polymer PTCs

### PMS Series, 1210 Size



#### Features:

- Resettable over-current protection
- Small size of 1210
- Fast time-to-trip
- RoHS compliant
- Halogen free

#### Application Fields:


- Battery packs
- Portable electronic devices
- Industrial controls
- Multimedia
- Game machines
- Telecom & broadband instruments

#### Agency Approval:

Recognized Under the Components Program of Underwriters Laboratories. File Number: E355716.

#### Shape and Dimensions:

Part Number	L (mm) Max.	W (mm) Max.	H (mm) Max.	D (mm) Min.
PMS1210-005	3.43	2.80	0.80	0.30
PMS1210-010	3.43	2.80	0.80	0.30
PMS1210-020	3.43	2.80	0.80	0.30
PMS1210-035	3.43	2.80	0.80	0.30
PMS1210-050-06	3.43	2.80	0.80	0.30
PMS1210-050	3.43	2.80	0.80	0.30
PMS1210-075	3.43	2.80	0.80	0.30
PMS1210-100	3.43	2.80	0.80	0.30
PMS1210-110	3.43	2.80	0.80	0.30
PMS1210-150	3.43	2.80	0.80	0.30
PMS1210-175	3.43	2.80	0.80	0.30
PMS1210-200	3.43	2.80	1.20	0.30

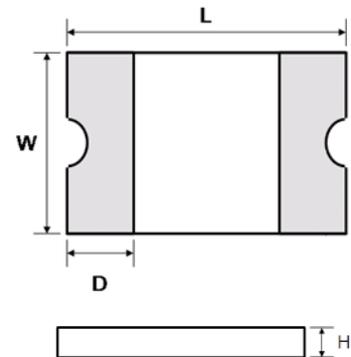

## Surface Mount Polymer PTCs

### PMS Series, 1210 Size

#### Typical Ratings and Characteristics (@25°C):

Operating Temperature: -40 to +85°C

Part Number	Current (A)		V <sub>Max</sub> (Vdc)	I <sub>Max</sub> (A)	Max. Time to Trip (sec)		Typical Power (Pd, W)	Resistance Min. (Ω)	One Hours Post Reflow Resistance R <sub>1</sub> Max. (Ω) <sup>1</sup>	UL Certification
	Hold (I <sub>H</sub> )	Trip (I <sub>T</sub> )			Current (A)	Time (sec)				
PMS1210-005	0.05	0.15	30	100	0.25	1.50	0.6	2.800	50.00	
PMS1210-010	0.10	0.30	30	100	0.50	0.60	0.6	0.800	15.00	
PMS1210-020	0.20	0.40	30	100	8.0	0.02	0.6	0.400	5.00	
PMS1210-035	0.35	0.75	6	100	8.0	0.20	0.6	0.200	1.300	√
PMS1210-050-06	0.50	1.00	6	100	8.0	0.10	0.6	0.180	0.900	√
PMS1210-050	0.50	1.00	13.2	100	8.0	0.10	0.6	0.180	0.900	
PMS1210-075	0.75	1.50	6	100	8.0	0.10	0.6	0.070	0.400	√
PMS1210-100	1.00	1.80	6	100	8.0	0.30	0.6	0.055	0.230	
PMS1210-110	1.10	2.20	6	100	8.0	0.30	0.6	0.050	0.210	√
PMS1210-150	1.50	3.00	6	100	8.0	0.50	0.6	0.030	0.110	√
PMS1210-175	1.75	3.50	6	100	8.0	0.60	0.8	0.020	0.080	
PMS1210-200	2.00	4.00	6	100	8.0	1.00	0.8	0.015	0.070	

<sup>1</sup> The max resistance of one-hour post reflow is a reference value. The value may change a little according to reflow conditions and soldering state.

## Surface Mount Polymer PTCs

### PMS Series, 1210 Size

#### Packaging and Marking Information:

Part Number	Part Marking	Tape & Reel Quantity (piece)
PMS1210-005	αA	4,500
PMS1210-010	αB	
PMS1210-020	αC	
PMS1210-035	αD	
PMS1210-050-06	αF	4,000
PMS1210-050	αF	
PMS1210-075	αG	
PMS1210-100	αH	4,500
PMS1210-110	αH	
PMS1210-150	αL	
PMS1210-175	αN	
PMS1210-200	αS	

#### Thermal De-rating Hold Current (A) at Ambient Temperature (25 °C):


Part Number	Ambient Temperature								
	-40°C	-20°C	0°C	25°C	40°C	50°C	60°C	70°C	85°C
PMS1210-005	0.08	0.07	0.06	0.05	0.04	0.04	0.03	0.03	0.02
PMS1210-010	0.16	0.14	0.12	0.10	0.08	0.07	0.06	0.05	0.03
PMS1210-020	0.29	0.26	0.22	0.20	0.16	0.14	0.13	0.11	0.08
PMS1210-035	0.47	0.45	0.40	0.35	0.33	0.28	0.24	0.21	0.18
PMS1210-050-06	0.76	0.67	0.58	0.50	0.43	0.40	0.36	0.32	0.28
PMS1210-050	0.76	0.67	0.58	0.50	0.43	0.40	0.36	0.32	0.28
PMS1210-075	1.00	0.97	0.86	0.75	0.64	0.59	0.54	0.48	0.40
PMS1210-100	1.54	1.35	1.18	1.00	0.76	0.67	0.53	0.45	0.31
PMS1210-110	1.69	1.48	1.29	1.10	0.88	0.76	0.65	0.57	0.43
PMS1210-150	2.13	1.92	1.71	1.50	1.26	1.14	1.01	0.89	0.71
PMS1210-175	2.54	2.30	2.02	1.75	1.47	1.33	1.18	1.05	0.86
PMS1210-200	2.90	2.63	2.31	2.00	1.68	1.52	1.35	1.20	0.98

# Surface Mount Polymer PTCs

## PMS Series, 1210 Size

Typical Time to Trip (@25°C):

PMS1210 series

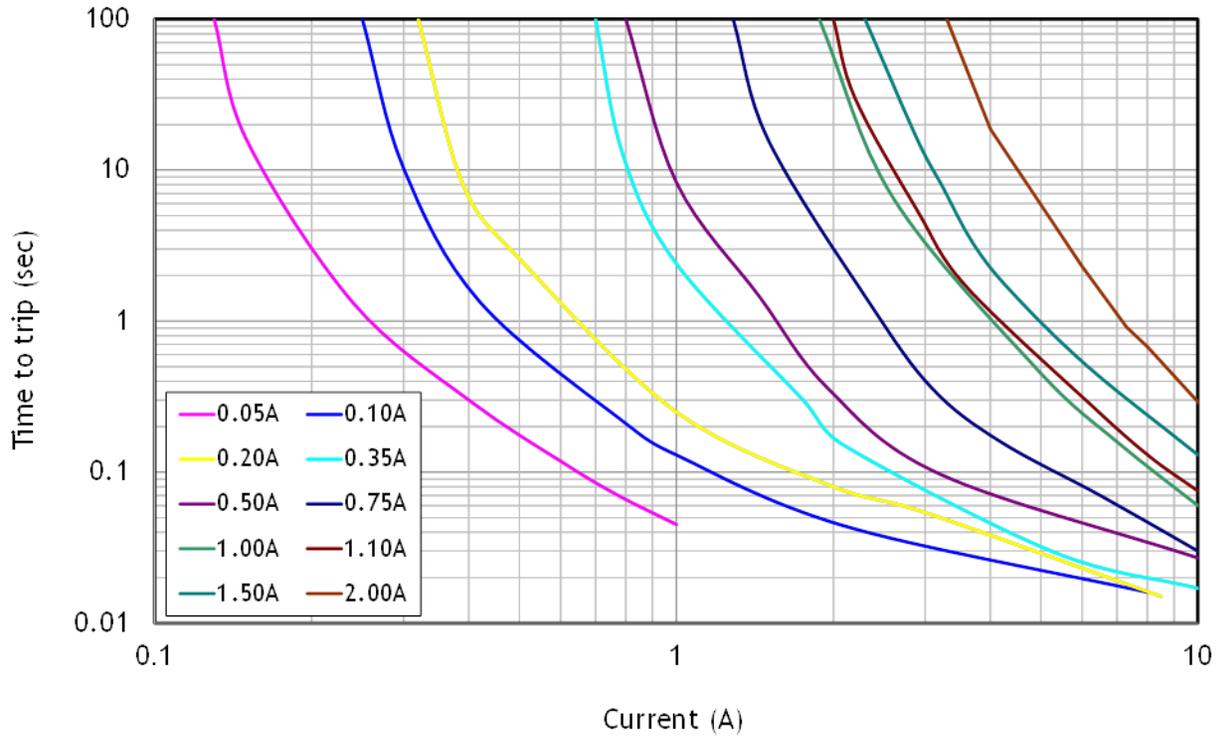

## Surface Mount Polymer PTCs

### PMS Series, 1812 Size



#### Features:

- Resettable over-current protection
- Small size of 1812
- Fast time-to-trip
- RoHS compliant
- Halogen free

#### Application Fields:


- Battery packs
- Portable electronic devices
- Industrial controls
- Multimedia
- Game machines
- Telecom & broadband instruments

#### Agency Approval:

Recognized Under the Components Program of Underwriters Laboratories. File Number: E355716.

#### Shape and Dimensions:

Part Number	L (mm) Max.	W (mm) Max.	H (mm) Max.	D (mm) Min.	E (mm) Min.
PMS1812-010	4.73	3.41	1.00	0.30	0.25
PMS1812-014	4.73	3.41	1.00	0.30	0.25
PMS1812-020	4.73	3.41	1.30	0.30	0.25
PMS1812-030	4.73	3.41	1.00	0.30	0.25
PMS1812-050	4.73	3.41	0.90	0.30	0.25
PMS1812-075	4.73	3.41	0.90	0.30	0.25
PMS1812-100	4.73	3.41	0.90	0.30	0.25
PMS1812-110	4.73	3.41	0.90	0.30	0.25
PMS1812-125	4.73	3.41	1.30	0.30	0.25
PMS1812-150	4.73	3.41	0.90	0.30	0.25
PMS1812-160	4.73	3.41	0.90	0.30	0.25
PMS1812-200	4.73	3.41	1.30	0.30	0.25
PMS1812-260	4.73	3.41	1.30	0.30	0.25
PMS1812-300	4.73	3.41	1.30	0.30	0.25
PMS1812-350	4.73	3.41	1.30	0.30	0.25
PMS1812-375	4.73	3.41	1.80	0.30	0.25

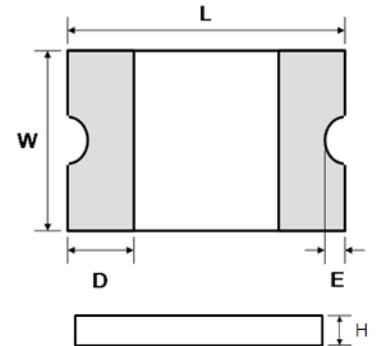

## Surface Mount Polymer PTCs

### PMS Series, 1812 Size

#### Typical Ratings and Characteristics (@25°C):

Operating Temperature: -40 to +85°C

Part Number	Current (A)		V <sub>Max</sub> (Vdc)	I <sub>Max</sub> (A)	Max. Time to Trip (sec)		Typical Power (Pd, W)	Resistance Min. (Ω)	One Hours Post Reflow Resistance R <sub>1</sub> Max. (Ω) <sup>1</sup>	UL Certification
	Hold (I <sub>H</sub> )	Trip (I <sub>T</sub> )			Current (A)	Time (sec)				
PMS1812-010	0.10	0.30	30	100	0.5	1.50	0.8	0.750	15.0	✓
PMS1812-014	0.14	0.34	60	100	1.5	0.15	0.8	0.650	6.00	
PMS1812-020	0.20	0.40	30	100	8.0	0.02	0.8	0.350	5.00	
PMS1812-030	0.30	0.60	30	100	8.0	0.10	0.8	0.250	3.00	
PMS1812-050	0.50	1.00	15	100	8.0	0.15	0.8	0.150	1.00	✓
PMS1812-075	0.75	1.50	13.2	100	8.0	0.20	0.8	0.090	0.450	✓
PMS1812-100	1.00	1.80	8	100	8.0	0.30	0.8	0.055	0.270	
PMS1812-110	1.10	2.20	8	100	8.0	0.30	0.8	0.050	0.250	✓
PMS1812-125	1.25	2.50	16	100	8.0	0.40	0.8	0.050	0.140	
PMS1812-150	1.50	3.00	8	100	8.0	0.50	0.8	0.040	0.160	✓
PMS1812-160	1.60	2.80	8	100	8.0	1.00	0.8	0.030	0.130	✓
PMS1812-200	2.00	4.00	8	100	8.0	2.00	0.8	0.020	0.100	✓
PMS1812-260	2.60	5.00	8	100	8.0	2.50	0.8	0.015	0.050	✓
PMS1812-300	3.00	5.00	8	100	8.0	4.00	0.8	0.012	0.040	
PMS1812-350	3.50	6.00	6	100	10.0	4.00	2.0	0.008	0.030	
PMS1812-375	3.75	7.00	6	100	12.0	4.00	2.0	0.007	0.028	

<sup>1</sup> The max resistance of one-hour post reflow is a reference value. The value may change a little according to reflow conditions and soldering state.


## Surface Mount Polymer PTCs

### PMS Series, 1812 Size

#### Packaging and Marking Information:

Part Number	Part Marking	Tape & Reel Quantity (piece)
PMS1812-010	α010	1,500
PMS1812-014	α014	
PMS1812-020	α020	
PMS1812-030	α030	
PMS1812-050	α050	
PMS1812-075	α075	
PMS1812-100	α100	
PMS1812-110	α110	
PMS1812-125	α125	
PMS1812-150	α150	
PMS1812-160	α160	
PMS1812-200	α200	
PMS1812-260	α260	
PMS1812-300	α300	
PMS1812-350	α350	
PMS1812-375	α375	

#### Typical Time to Trip (@25°C):

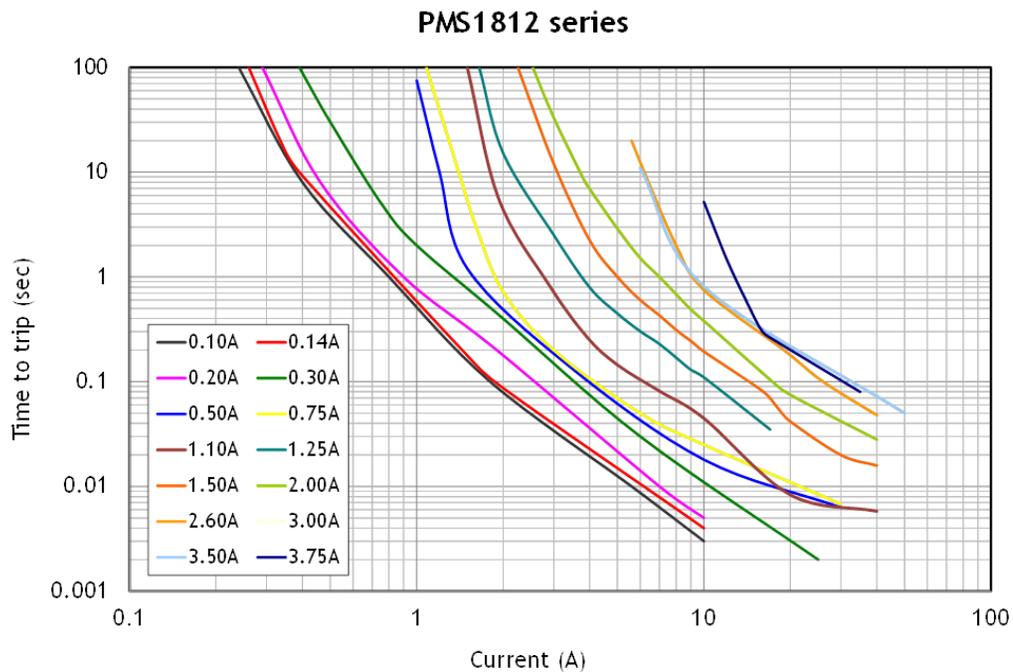

## Surface Mount Polymer PTCs

### PMS Series, 1812 Size

#### Thermal De-rating Hold Current (A) at Ambient Temperature (25 °C):

Part Number	Ambient Temperature								
	-40°C	-20°C	0°C	25°C	40°C	50°C	60°C	70°C	85°C
PMS1812-010	0.16	0.14	0.12	0.10	0.08	0.07	0.06	0.05	0.03
PMS1812-014	0.23	0.19	0.17	0.14	0.12	0.10	0.09	0.08	0.06
PMS1812-020	0.29	0.26	0.23	0.20	0.17	0.15	0.14	0.12	0.10
PMS1812-030	0.44	0.39	0.35	0.30	0.26	0.23	0.21	0.18	0.15
PMS1812-050	0.59	0.57	0.55	0.50	0.45	0.43	0.35	0.30	0.23
PMS1812-075	1.10	0.99	0.87	0.75	0.63	0.57	0.49	0.45	0.35
PMS1812-100	1.45	1.32	1.16	1.00	0.84	0.75	0.68	0.60	0.48
PMS1812-110	1.60	1.45	1.28	1.10	0.92	0.83	0.71	0.66	0.52
PMS1812-125	2.00	1.75	1.52	1.25	1.00	0.95	0.90	0.75	0.53
PMS1812-150	2.30	2.05	1.77	1.50	1.23	1.09	0.95	0.82	0.61
PMS1812-160	2.40	2.15	1.88	1.60	1.26	1.12	0.98	0.84	0.63
PMS1812-200	2.88	2.61	2.25	2.00	1.80	1.66	1.45	1.09	0.80
PMS1812-260	3.90	3.42	2.96	2.60	2.33	2.07	1.94	1.35	1.00
PMS1812-300	4.15	3.76	3.46	3.00	2.55	2.28	2.01	1.61	1.33
PMS1812-350	5.04	4.57	3.94	3.50	3.15	2.91	2.54	1.91	1.40
PMS1812-375	5.45	4.94	4.36	3.75	3.14	2.83	2.54	2.25	1.82

## Surface Mount Polymer PTCs

### PMS Series, 2018 Size

#### Features:

- Resettable over-current protection
- Fast time-to-trip
- RoHS compliant
- Halogen free



#### Shape and Dimensions:


Part Number	L (mm) Max.	W (mm) Max.	H (mm) Max.	D (mm) Min.
PMS2018-030	5.44	4.93	1.10	0.30
PMS2018-050	5.44	4.93	1.30	0.30
PMS2018-100	5.44	4.93	0.80	0.30
PMS2018-150	5.44	4.93	0.80	0.30
PMS2018-200	5.44	4.93	0.80	0.30

#### Application Fields:

- Battery packs
- Portable electronic devices
- Industrial controls
- Multimedia
- Game machines
- Telecom & broadband instruments

#### Agency Approval:

Recognized Under the Components Program of Underwriters Laboratories. File Number: E355716.

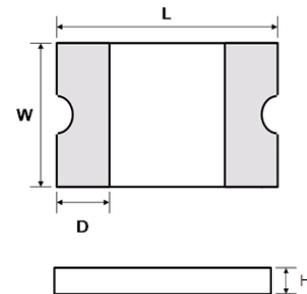

#### Typical Ratings and Characteristics (@25°C):

Operating Temperature: -40 to +85°C

Part Number	Current (A)		$V_{Max}$ (Vdc)	$I_{Max}$ (A)	Max. Time to Trip (sec)		Typical Power (Pd, W)	Resistance e Min. (Ω)	One Hours Post Reflow Resistance $R_1$ Max. (Ω) <sup>1</sup>
	Hold ( $I_H$ )	Trip ( $I_T$ )			Current (A)	Time (sec)			
PMS2018-030	0.30	0.60	60	100	1.5	3.00	0.9	0.500	2.300
PMS2018-050	0.55	1.20	60	100	2.5	3.00	1.0	0.200	1.000
PMS2018-100	1.10	2.20	15	100	8.0	0.40	1.1	0.060	0.360
PMS2018-150	1.50	3.00	15	100	8.0	0.80	1.1	0.050	0.170
PMS2018-200	2.00	4.00	10	100	8.0	2.40	1.1	0.030	0.100

<sup>1</sup> The max resistance of one-hour post reflow is a reference value. The value may change a little according to reflow conditions and soldering state.

## Surface Mount Polymer PTCs

### PMS Series, 2018 Size


#### Packaging and Marking Information:

Part Number	Part Marking	Tape & Reel Quantity (piece)
PMS2018-030	α030	1,500
PMS2018-050	α050	
PMS2018-100	α100	2,500
PMS2018-150	α150	
PMS2018-200	α200	

#### Thermal De-rating Hold Current (A) at Ambient Temperature (25 °C):

Part Number	Ambient Temperature								
	-40°C	-20°C	0°C	25°C	40°C	50°C	60°C	70°C	85°C
PMS2018-030	0.48	0.42	0.35	0.30	0.24	0.21	0.17	0.15	0.10
PMS2018-050	0.87	0.77	0.67	0.55	0.46	0.41	0.36	0.31	0.23
PMS2018-100	1.71	1.52	1.32	1.10	0.94	0.84	0.74	0.64	0.50
PMS2018-150	2.38	2.10	1.82	1.50	1.27	1.13	0.99	0.85	0.64
PMS2018-200	2.95	2.65	2.35	2.00	1.74	1.59	1.44	1.29	1.06

#### Typical Time to Trip (@25°C):

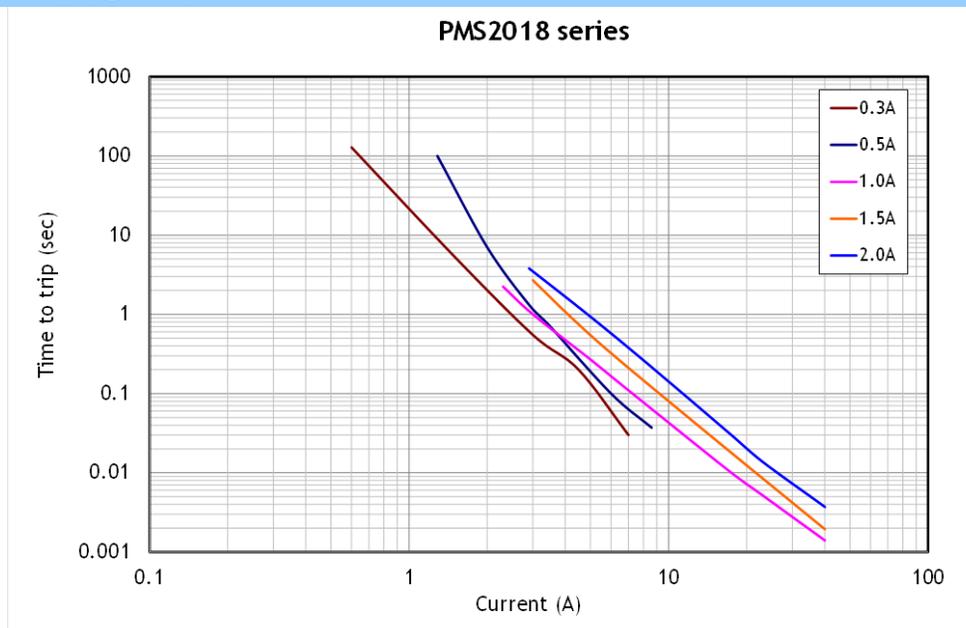

## Surface Mount Polymer PTCs

### PMS Series, 2920 Size



#### Features:

- Resettable over-current protection
- Fast time-to-trip
- RoHS compliant
- Halogen free

#### Application Fields:


- Battery packs
- Portable electronic devices
- Industrial controls
- Multimedia
- Game machines
- Telecom & broadband instruments

#### Agency Approval:

Recognized Under the Components Program of Underwriters Laboratories. File Number: E355716.

#### Shape and Dimensions:

Part Number	L (mm) Max.	W (mm) Max.	H (mm) Max.	D (mm) Min.
PMS2920-030	7.98	5.44	1.15	0.30
PMS2920-050	7.98	5.44	1.15	0.30
PMS2920-075	7.98	5.44	1.15	0.30
PMS2920-100	7.98	5.44	1.00	0.30
PMS2920-125	7.98	5.44	0.90	0.30
PMS2920-150	7.98	5.44	0.90	0.30
PMS2920-185	7.98	5.44	0.90	0.30
PMS2920-200	7.98	5.44	0.90	0.30
PMS2920-250	7.98	5.44	0.90	0.30
PMS2920-260	7.98	5.44	0.90	0.30
PMS2920-300-06	7.98	5.44	0.90	0.30
PMS2920-300	7.98	5.44	0.90	0.30

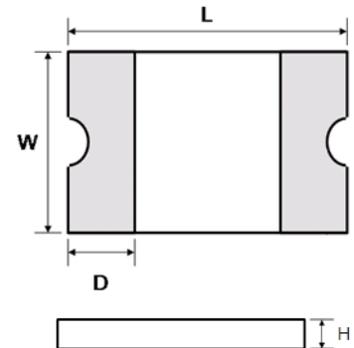

## Surface Mount Polymer PTCs

### PMS Series, 2920 Size

#### Typical Ratings and Characteristics (@25°C):

Operating Temperature: -40 to +85°C

Part Number	Current (A)		V <sub>Max</sub> (Vdc)	I <sub>Max</sub> (A)	Max. Time to Trip (sec)		Typical Power (Pd, W)	Resistance Min. (Ω)	One Hours Post Reflow Resistance R <sub>1</sub> Max. (Ω) <sup>1</sup>	UL Certification
	Hold (I <sub>H</sub> )	Trip (I <sub>T</sub> )			Current (A)	Time (sec)				
PMS2920-030	0.30	0.60	60	100	1.5	3.0	1.50	0.600	4.80	
PMS2920-050	0.50	1.00	60	100	2.5	4.0	1.50	0.180	1.40	
PMS2920-075	0.75	1.50	33	100	8.0	0.3	1.50	0.100	1.00	
PMS2920-100	1.10	2.20	33	100	8.0	0.5	1.50	0.065	0.410	
PMS2920-125	1.25	2.50	33	100	8.0	2.0	1.50	0.050	0.250	
PMS2920-150	1.50	3.00	33	100	8.0	2.0	1.50	0.035	0.230	
PMS2920-185	1.85	3.75	33	100	8.0	2.5	1.50	0.030	0.150	
PMS2920-200	2.00	4.00	16	100	8.0	4.5	1.50	0.020	0.120	
PMS2920-250	2.50	5.00	16	100	8.0	16.0	1.50	0.020	0.085	
PMS2920-260	2.60	5.20	6	100	8.0	10.0	1.50	0.014	0.075	
PMS2920-300-06	3.00	6.00	6	40	8.0	20.0	1.50	0.012	0.048	
PMS2920-300	3.00	6.00	16	100	8.0	20.0	1.50	0.012	0.048	√

<sup>1</sup> The max resistance of one-hour post reflow is a reference value. The value may change a little according to reflow conditions and soldering state.

## Surface Mount Polymer PTCs

### PMS Series, 2920 Size

#### Packaging and Marking Information:

Part Number	Part Marking	Tape & Reel Quantity (piece)
PMS2920-030	α030L	2,000
PMS2920-050	α050L	
PMS2920-075	α075L	
PMS2920-100	α100L	
PMS2920-125	α125L	
PMS2920-150	α150L	
PMS2920-185	α185L	
PMS2920-200	α200L	
PMS2920-250	α250L	
PMS2920-260	α260L	
PMS2920-300-06	α300L	
PMS2920-300	α300L	


#### Thermal De-rating Hold Current (A) at Ambient Temperature (25 °C):

Part Number	Ambient Temperature								
	-40°C	-20°C	0°C	25°C	40°C	50°C	60°C	70°C	85°C
PMS2920-030	0.45	0.40	0.35	0.30	0.25	0.23	0.20	0.17	0.14
PMS2920-050	0.76	0.67	0.59	0.50	0.42	0.38	0.33	0.29	0.23
PMS2920-075	1.13	1.01	0.88	0.75	0.62	0.56	0.50	0.44	0.34
PMS2920-100	1.66	1.47	1.29	1.10	0.91	0.83	0.73	0.64	0.50
PMS2920-125	1.89	1.68	1.46	1.25	1.04	0.94	0.83	0.73	0.56
PMS2920-150	2.27	2.01	1.76	1.50	1.25	1.13	1.00	0.87	0.74
PMS2920-185	2.80	2.47	2.17	1.85	1.54	1.39	1.22	1.07	0.85
PMS2920-200	3.02	2.68	2.34	2.00	1.66	1.50	1.32	1.16	0.90
PMS2920-250	3.78	3.35	2.93	2.50	2.08	1.88	1.65	1.45	1.13
PMS2920-260	3.64	3.25	2.91	2.60	2.26	2.08	1.95	1.74	1.13
PMS2920-300-06	4.53	4.02	3.51	3.00	2.52	2.26	1.99	1.75	1.34
PMS2920-300	4.53	4.02	3.51	3.00	2.52	2.26	1.99	1.75	1.34

# Surface Mount Polymer PTCs

## PMS Series, 2920 Size

Typical Time to Trip (@25°C):

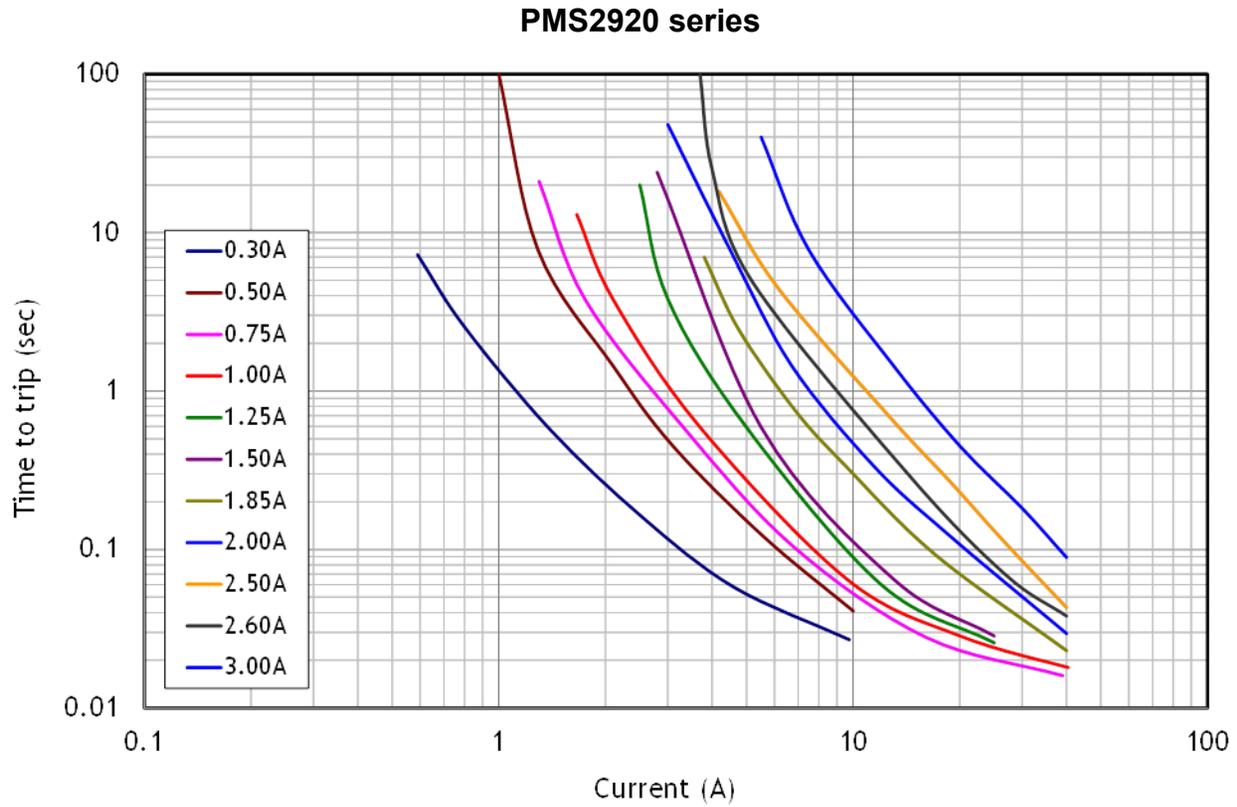

## Surface Mount Polymer PTCs

### Ordering Code:


**PMS 1210—050 06**  
 (1) (2) (3) (4)

- (1) Series code
- (2) Size code
- (3) Current rating code  
050:0.5A
- (4) Voltage rating code  
06:6Vdc

### Environmental Tests:

No.	Test Item	Test condition	Requirement
1	Passive aging	+85°C, 1000 hrs.	±5% typical
2	Humidity aging	+85°C, 85% R.H. , 168 hrs	±5% typical
3	Thermal shock	+85°C to -40°C, 20 times	±33% typical
4	Resistance to solvent	MIL-STD-202, Method 215	No change
5	Vibration	MIL-STD-202, Method 201	No change

### Recommended Reflow Soldering Profile:

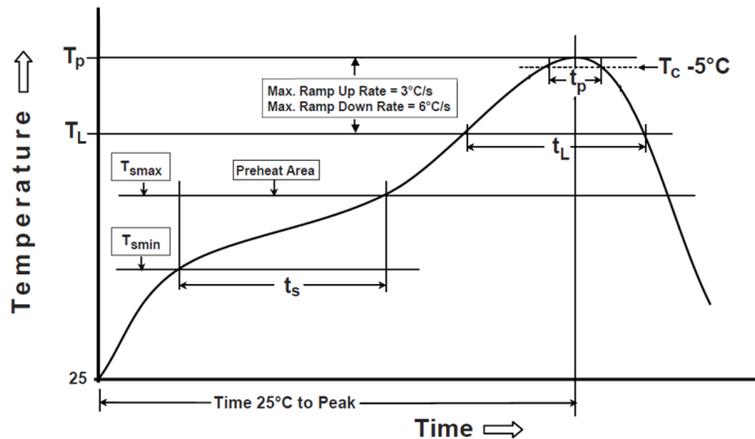

Profile Feature	Pb-Free Assembly
<b>Preheat/Soak</b> Temperature Min ( $T_{smin}$ ) Temperature Max ( $T_{smax}$ ) Time ( $t_s$ ) from ( $T_{smin}$ to $T_{smax}$ )	150°C 200°C 60~120 seconds
Ramp-up rate ( $T_L$ to $T_p$ )	3°C/second max.
Liquidous temperature ( $T_L$ ) Time ( $t_L$ ) maintained above $T_L$	217°C 60~150 seconds
Peak package body temperature ( $T_p$ )	260°C
Time ( $t_p$ )* within 5°C of the specified classification temperature ( $T_c$ )	30 seconds *
Ramp-down rate ( $T_p$ to $T_L$ )	6°C/second max.
Time 25°C to peak temperature	8 minutes max.
* Tolerance for peak profile temperature ( $T_p$ ) is defined as a supplier minimum and a user maximum	

## Surface Mount Multilayer Varistors

### ESD Protection (ES) Series

#### Features:

- Fast Response < 0.5 ns
- Low Working Voltage 5 V
- Low Capacitance
- Low Leakage Current < 1  $\mu$ A
- Low Clamping Voltage

#### Application Fields:

- Cell Phones
- Digital Cameras
- PDAs
- MP3
- Notebooks

Part Number	Working Voltage (Max)	Clamping Voltage (Max)	Leakage Current (Max)	Typical Capacitance Value (1 MHz)	Tolerance of Cap.
	DC(V)	(V)	ILDC( $\mu$ A)	C (pF)	(%)
MLV0402ES005V0100N	5.5	55	1	100	$\pm$ 30
MLV0402ES005V0056N	5.5	55	1	56	$\pm$ 30
MLV0402ES005V0033N	5.5	55	1	33	$\pm$ 30
MLV0402ES005V0022N	5.5	55	1	22	$\pm$ 30
MLV0402ES005V0010N	5.5	60	1	10	$\pm$ 30
MLV0402ES005V0005P	5.5	76	1	5	5~9 pF
MLV0402ES012V0100N	12	55	1	100	$\pm$ 30
MLV0402ES012V0056N	12	55	1	56	$\pm$ 30
MLV0402ES012V0033N	12	55	1	33	$\pm$ 30
MLV0402ES012V0022N	12	55	1	22	$\pm$ 30
MLV0402ES012V0010N	12	60	1	10	$\pm$ 30
MLV0402ES012V0005P	12	80	1	5	5~9 pF
MLV0402ES024V0003N	24	120	1	3	$\pm$ 30
MLV0402ES024V02R5P	24	198	1	2.5	2~4 pF
MLV0402ES024V00R8P	24	200	1	0.8	0.8~1.5 pF
MLV0603ES005V0100N	5.5	55	1	100	$\pm$ 30
MLV0603ES005V0056N	5.5	55	1	56	$\pm$ 30
MLV0603ES005V0033N	5.5	55	1	33	$\pm$ 30
MLV0603ES005V0022N	5.5	55	1	22	$\pm$ 30
MLV0603ES005V0010N	5.5	60	1	10	$\pm$ 30
MLV0603ES005V0005P	5.5	76	1	5	5~9 pF
MLV0603ES012V0100N	12	55	1	100	$\pm$ 30
MLV0603ES012V0056N	12	55	1	56	$\pm$ 30
MLV0603ES012V0033N	12	55	1	33	$\pm$ 30
MLV0603ES012V0022N	12	55	1	22	$\pm$ 30
MLV0603ES012V0010N	12	60	1	10	$\pm$ 30
MLV0603ES012V0005P	12	80	1	5	5~9 pF
MLV0603ES024V0003N	24	120	1	3	$\pm$ 30
MLV0603ES024V02R5P	24	198	1	2.5	2~4 pF
MLV0603ES024V00R8P	24	200	1	0.8	0.8~1.5 pF
MLV0805ES005V0100N	5.5	50	1	100	$\pm$ 30
MLV0805ES005V0056N	5.5	50	1	56	$\pm$ 30

## Surface Mount Multilayer Varistors

### Normal Surge Protection (NA) Series

#### Features:

- Fast Response < 0.5 ns
- Low Capacitance
- Low Clamping Voltage and High Energy Absorption

#### Application Fields:

- Telecommunications
- Automotive Systems
- Data Systems
- Power Supplies

#### Ordering Information:

Part Number	Working Voltage (max)		Breakdown Voltage 1 mA (V)	Peak Current (max) 8/20 $\mu$ s (A)	Clamping Voltage (max)		Energy Absorption (max) 10/1000 $\mu$ s (J)	Typical Capacitance Ref. 1 KHz (pF)
	AC (V <sub>RMS</sub> )	DC (V)			(A)	(V)		
MLV0402NA006V0020	4	5.5	8 (7.5~10.5)	20	1	20	0.05	200
MLV0402NA009V0020	6	9	12 (10.2~13.8)	20	1	23	0.05	135
MLV0402NA011V0020	8	11	15 (12.8~17.3)	20	1	25	0.05	75
MLV0402NA014V0020	11	14	18 (15.3~20.7)	20	1	30	0.05	50
MLV0402NA018V0020	14	18	24 (21.6~26.4)	20	1	39	0.05	45
MLV0603NA006V0030	4	5.5	8 (7.5~10.5)	30	1	20	0.1	360
MLV0603NA009V0030	6	9	12 (10.2~13.8)	30	1	23	0.1	300
MLV0603NA014V0030	11	14	18 (15.3~20.7)	30	1	30	0.1	210
MLV0603NA018V0030	14	18	24 (21.6~26.4)	30	1	39	0.1	160
MLV0603NA022V0030	17	22	27 (24.3~29.7)	30	1	44	0.1	145
MLV0603NA030V0030	25	30	39 (35.1~42.9)	30	1	65	0.1	110
MLV0603NA038V0030	30	38	47 (42.3~51.7)	30	1	77	0.1	90
MLV0805NA006V0080	4	5.5	8 (7.5~10.5)	80	1	20	0.1	1400
MLV0805NA009V0080	6	9	12 (10.2~13.8)	80	1	23	0.1	650
MLV0805NA011V0100	8	11	15 (12.75~17.25)	100	1	25	0.2	410
MLV0805NA014V0100	11	14	18 (15.3~20.7)	100	1	30	0.2	350
MLV0805NA018V0100	14	18	24 (21.6~26.4)	100	1	39	0.2	300
MLV0805NA022V0100	17	22	27 (24.3~29.7)	100	1	44	0.2	250
MLV0805NA026V0100	20	26	33 (29.7~36.3)	100	1	54	0.3	220
MLV0805NA030V0100	25	30	39 (35.1~42.9)	100	1	65	0.3	200
MLV0805NA038V0100	30	38	47 (42.3~51.7)	100	1	77	0.3	150
MLV0805NA045V0080	35	45	56 (50.4~61.6)	80	1	90	0.3	110
MLV1206NA006V0100	4	5.5	8 (7.5~10.5)	100	1	20	0.2	3100
MLV1206NA014V0100	11	14	18 (15.3~20.7)	100	1	30	0.3	800
MLV1206NA018V0100	14	18	24 (21.6~26.4)	100	1	38	0.3	620
MLV1206NA022V0100	17	22	27 (24.3~29.7)	100	1	44	0.4	700
MLV1206NA026V0100	20	26	33 (29.7~36.3)	100	1	54	0.5	480
MLV1206NA030V0100	25	30	39 (35.1~42.9)	100	1	65	0.6	400

## Surface Mount Multilayer Varistors

### Normal Surge Protection (NA) Series

#### Ordering Information:

Part Number	Working Voltage (max)		Breakdown Voltage 1 mA (V)	Peak Current (max) 8/20 $\mu$ s (A)	Clamping Voltage (max)		Energy Absorption (max) 10/1000 $\mu$ s (J)	Typical Capacitance 1 KHz (pF)
	AC (V <sub>RMS</sub> )	DC (V)			(A)	(V)		
MLV1206NA038V0100	30	38	47 (42.3~51.7)	100	1	77	0.7	260
MLV1206NA045V0100	35	45	56 (50.4~61.6)	100	1	90	0.8	230
MLV1206NA056V0100	40	56	68 (61.2~74.8)	100	1	110	1.0	200
MLV1206NA065V0100	50	65	82 (73.8~90.2)	100	1	135	0.5	175
MLV1206NA085V0100	60	85	100 (90~110)	100	1	165	0.6	150
MLV1210NA006V0250	4.5	5.5	8 (7.5~10.5)	250	2.5	20	0.5	5200
MLV1210NA018V0250	14	18	24 (21.6~26.4)	250	2.5	38	0.8	1150
MLV1210NA022V0250	17	22	27 (24.3~29.7)	250	2.5	44	1.0	1720
MLV1210NA026V0250	20	26	33 (29.7~36.3)	250	2.5	54	1.2	610
MLV1210NA030V0250	25	30	39 (35.1~42.9)	250	2.5	65	1.4	920
MLV1210NA038V0250	30	38	47 (42.3~51.7)	250	2.5	77	1.6	780
MLV1210NA045V0250	35	45	56 (50.4~61.6)	250	2.5	90	2.0	400
MLV1210NA056V0250	40	56	68 (61.2~74.8)	250	2.5	110	2.3	300
MLV1210NA085V0200	60	85	100 (90~110)	200	2.5	165	1.4	210
MLV1812NA018V0500	14	18	24 (21.6~26.4)	500	5	38	1.7	2000
MLV1812NA030V0500	25	30	39 (35.1~42.9)	500	5	65	2.9	2500
MLV1812NA038V0500	30	38	47 (42.3~51.7)	500	5	77	3.5	2200
MLV1812NA045V0500	35	45	56 (50.4~61.6)	500	5	90	4.2	1000
MLV2220NA018V1000	14	18	24 (21.6~26.4)	1000	10	38	3.1	8500
MLV2220NA030V1000	25	30	39 (35.1~42.9)	1000	10	65	5.5	3900
MLV2220NA038V1000	30	38	47 (42.3~51.7)	1000	10	77	6.3	4600
MLV2220NA056V1000	40	56	68 (61.2~74.8)	1000	10	110	8.8	4000

## Surface Mount Multilayer Varistors

### High Surge Protection (HA) Series

#### Features:

- Fast Response < 0.5 ns
- Low Capacitance
- Low Clamping Voltage and High Energy Absorption

#### Application Fields:

- Telecommunications
- Automotive Systems
- Data Systems
- Power Supplies

#### Ordering Information:

Part Number	Working Voltage (max)		Breakdown Voltage 1 mA (V)	Peak Current (max) 8/20 $\mu$ s (A)	Clamping Voltage (max)		Energy Absorption (max) 10/1000 $\mu$ s (J)	Typical Capacitance 1 KHz (pF)
	AC (V <sub>RMS</sub> )	DC (V)			(A)	(V)		
MLV1206HA014V0200	11	14	18 (15.3~20.7)	200	1	30	0.5	1200
MLV1206HA018V0200	14	18	24 (21.6~27.0)	200	1	39	0.5	780
MLV1206HA022V0200	17	22	27 (24.3~29.8)	200	1	44	0.7	750
MLV1206HA026V0200	20	26	33 (29.7~36.3)	200	1	54	1.0	700
MLV1206HA030V0200	25	30	39 (35.1~42.9)	200	1	65	1.0	510
MLV1206HA038V0200	30	38	47 (42.3~51.7)	200	1	77	1.1	440
MLV1210HA014V0400	11	14	18 (15.3~20.7)	400	2.5	30	1.2	2000
MLV1210HA018V0400	14	18	24 (21.6~27.0)	400	2.5	39	1.4	1600
MLV1210HA022V0400	17	22	27 (24.3~29.8)	400	2.5	44	1.7	1500
MLV1210HA026V0400	20	26	33 (29.7~36.3)	400	2.5	54	1.9	880
MLV1210HA030V0400	25	30	39 (35.1~42.9)	400	2.5	65	1.7	800
MLV1210HA038V0400	30	38	47 (42.3~51.7)	400	2.5	77	2.0	530
MLV1812HA018V0800	14	18	24 (21.6~27.0)	800	5	38	2.3	3500
MLV1812HA030V0800	25	30	39 (35.1~42.9)	800	5	65	3.7	2350
MLV1812HA038V0800	30	38	47 (42.3~51.7)	800	5	77	4.2	1600
MLV1812HA045V0800	35	45	56 (50.4~61.6)	800	5	90	4.2	1200
MLV2220HA014V1200	11	14	18 (15.3~20.7)	1200	10	30	5.4	10500
MLV2220HA018V1200	14	18	24 (21.6~27.0)	1200	10	39	5.8	8500
MLV2220HA022V1200	17	22	27 (24.3~29.8)	1200	10	44	7.2	8300
MLV2220HA030V1200	25	30	39 (35.1~42.9)	1200	10	65	9.6	6000
MLV2220HA038V1200	30	38	47 (42.3~51.7)	1200	10	77	12.0	4000
MLV2220HA045V1200	35	45	56 (50.4~61.6)	1200	10	90	12.0	3500

## Surface Mount Multilayer Varistors


### High Voltage (HV) Series

#### Features:

- Bidirectional and symmetrical V/I characteristics Low Capacitance
- Meet IEC61000-4-2 Standard
- Large withstanding surge current capability - 400~500A (@8/20 $\mu$ s)
- Multilayer construction provides higher power dissipation

#### Shape and Dimensions:

Unit (mm)	Length (L)	Width (W)	Thickness (T)	Termination bandwidth (b)
MLV3220HV240V0500	8.1 $\pm$ 0.30	5.0 $\pm$ 0.30	1.7 $\pm$ 0.30	0.8 +0.5/-0.1
MLV3220HV270V0500				
MLV3220HV390V0500				
MLV3220HV430V0450				
MLV3220HV470V0400				

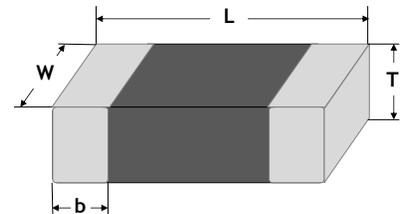

#### Product Identification:

MLV	3220	HV	270V	0500
<u>Category Code</u>	<u>Size Code</u>	<u>Application Code</u>	<u>Breakdown Voltage Code</u>	<u>Surge Current Code</u>
MLV = Multilayer Varistor	Inch (mm) 3220 (8153)	HV = High Voltage	390V = 390V 430V = 430V 470V = 470V	0400 = 400A 0450 = 450A 0500 = 500A

#### Electrical Characteristics:

Operating temperature: -55 to +85°C

Part Number	Size	Working Voltage		Breakdown Voltage <sup>1</sup> @1mA (V)	Clamping Voltage <sup>2</sup>		Surge Current <sup>3</sup> @8/20 $\mu$ s (A)	Energy (J)	Capacitance <sup>4</sup> @1kHz (pF)
		Vac	Vdc		A	V			
MLV3220HV240V0500	3220	150	200	240 ( $\pm$ 10%)	10	390	500	> 14.5	380
MLV3220HV270V0500		175	225	270 ( $\pm$ 10%)		450	500	> 16.0	340
MLV3220HV390V0500		250	330	390 ( $\pm$ 10%)		647	500	> 20.0	125
MLV3220HV430V0450		275	369	430 ( $\pm$ 10%)		705	450	> 21.0	120
MLV3220HV470V0400		300	385	470 ( $\pm$ 10%)		775	400	> 21.6	115

<sup>1</sup> The breakdown voltage was measured at 1 mA current.

<sup>2</sup> The clamping voltage was measured at standard current 3220 (10A).

<sup>3</sup> The surge current was tested at 8/20  $\mu$ s waveform.


<sup>4</sup> The capacitance value only for customer reference, it's not formal specification.

# Surface Mount Multilayer Varistors

## High Voltage (HV) Series

### Construction and Materials:

Body ①	Termination ②
ZnO	Ag/Ni/Sn




### Packaging:

Chip Size	Parts on 7 inch (178mm) Reel
3220	1,000


### Recommended Foot Print Dimensions:

Size	A (mm)	B (mm)	C (mm)
3220	6.2~7.0	1.6~2.6	4.8~5.8

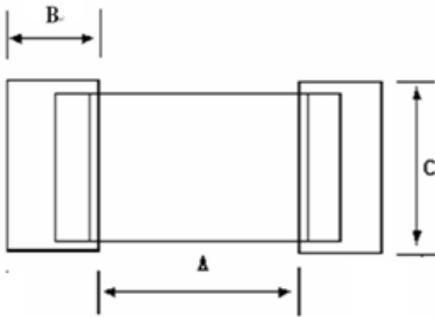

### Surge Waveform:

Severity Level	t1 (=1.67t'1)	t2
1	8 μs	20 μs

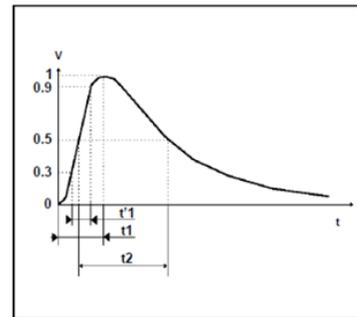


### Environmental Test:

Test item	Test condition	Requirement
High Temperature Storage	* Temperature : 125±2°C * Time : 1000±2 hours * Test after placing in ambient temperature for 24 hours	* Breakdown voltage change : within ±10% * No mechanical damage
High Temperature Storage	* Temperature : 125±2°C * Time : 1000±2 hours * Test after placing in ambient temperature for 24 hours	* Breakdown voltage change : within ±10% * No mechanical damage
High Temperature Storage	* Temperature : 125±2°C * Time : 1000±2 hours * Test after placing in ambient temperature for 24 hours	* Breakdown voltage change : within ±10% * No mechanical damage
High Temperature Load	* Temperature : 85±2°C * Rated working voltage applied * Time : 1000±2 hours * Test after placing in ambient temperature for 24 hours	* Breakdown voltage change : within ±10% * No mechanical damage
High Temperature Load	* Temperature : 85±2°C * Rated working voltage applied * Time : 1000±2 hours * Test after placing in ambient temperature for 24 hours	* Breakdown voltage change : within ±10% * No mechanical damage

## Surface Mount Multilayer Varistors

### ESD Array Series

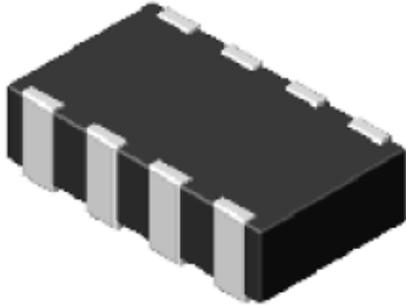

#### Features:

- Low Leakage Current
- Low Leakage Inductance and Fast Response
- Four Varistors in a chip
- Minimizing Crosstalk between Adjacent Circuits

#### Application Fields:

- ESD protection
- ECU protection
- I/O Protection
- LCD Display

#### Ordering Information:

Part Number	Working Voltage (Max.)	Breakdown Voltage	Clamping Voltage (Max.)	Leakage Current (Max.)	Insulation Resistance (Min.)	Typical Capacitance Value (1 MHz)	Tolerance of Cap.
	DC(V)	(V)	(V)	( $\mu$ A)	(M $\Omega$ )	(pF)	(%)
MVA0508L4V005C0010N	5	24	60	1.0	10	10	$\pm$ 30
MVA0612L4V018C0120N	18	28	50	1.0	10	120	$\pm$ 30

## Surface Mount Multilayer Varistors

### Product Identification:

MLV 0402 ES 012V 0100 N T  
 (1) (2) (3) (4) (5) (6) (7)

(1) Series Code:

**MLV** – Surface Mount Multilayer Varistor

**MVA** -- MLV Array

(2) Size Code:

Standard EIA Chip Size

(3) Application Code:

**ES** – Electro-static Discharge Protection

**NA** – Normal Surge Protection

**HA** – High Surge Protection

(4) Max. Working Voltage:

**012V** – 12 V

(5) Capacitance for ES Series:

**0100** – 100 pF

**02R5** – 2.5 pF

Peak Current for HA/NA Series: **0100** – 100 A

(6) Capacitance Tolerance for ES Series:

**N** – ± 30%

**P** – **Special**

(7) Packaging Code:

**T** – Tape & Reel

**B** – Bulk

### Operating Temperatures:

-55°C to +85°C for size 0603 or smaller      -55°C to +125°C for size 0805 or larger


### Terms and Definitions:

Term	Definition
Max. Working Voltage	Maximum steady-state DC operating voltage with typical leakage current less than 50 $\mu$ A at 25°C
Varistor Voltage (BDV)	Breakdown DC voltage measured at current of 1 mA
Max. Clamping Voltage	Maximum peak voltage across the part, measured at a specified pulse current and waveform
Surge Current	Maximum peak current with the specified 8/20 $\mu$ s waveform without damage
Surge Shift $\Delta$ V/V	The change of varistor voltage after applying the specified surge current
Energy Absorption	Maximum energy dissipated with a specified 10/1000 $\mu$ s waveform without damage
Typical Capacitance	Capacitance measured with voltage bias less than 0.5 $V_{RMS}$ at 1 KHz or 1 MHz
Nonlinear Exponent $\alpha$	$\alpha = \left( \log \left( V_{1mA} / V_{0.1mA} \right) / \log \left( I_{V1mA} / I_{V0.1mA} \right) \right)$
Leakage Current	Typical leakage current at 25 °C < 50 $\mu$ A; Maximum leakage 200 $\mu$ A.
Cut-off Frequency	The frequency of -3 dB insertion loss

## Surface Mount Multilayer Varistors


### Shape and Dimensions:

#### MLV Series

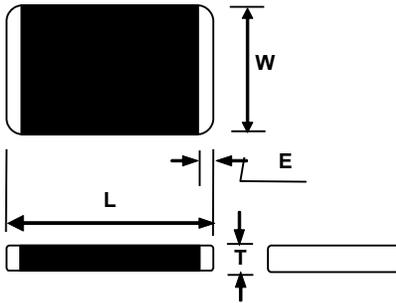

Size	L (mm)	W (mm)	T (mm)	E (mm)
0201	0.60 ± 0.03	0.30 ± 0.03	0.30 ± 0.03	0.30 ± 0.03
0402	1.00 ± 0.10	0.50 ± 0.10	0.50 ± 0.10	0.25 ± 0.10
0603	1.60 ± 0.15	0.80 ± 0.15	0.90 max.	0.30 ± 0.10
0805	2.00 ± 0.20	1.25 ± 0.15	1.00 max.	0.30 ± 0.10
1206	3.20 ± 0.20	1.60 ± 0.15	1.20 max.	0.50 ± 0.20
1210	3.20 ± 0.20	2.50 ± 0.20	1.50 max.	0.50 ± 0.20
1812	4.50 ± 0.20	3.20 ± 0.20	2.00 max.	0.60 ± 0.20
2220	5.70 ± 0.20	5.00 ± 0.20	3.00 max.	0.60 ± 0.20

#### ESD Array

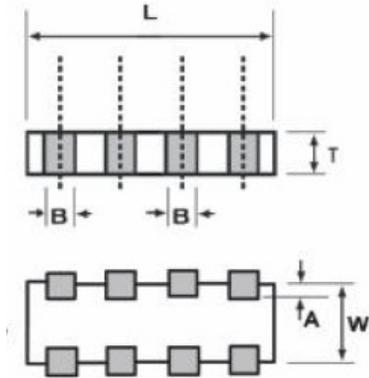


Size	0508	0612
L (mm)	2.00 ± 0.20	3.20 ± 0.20
W (mm)	1.25 ± 0.20	1.60 ± 0.15
T (mm)	0.80 max.	0.95 max.
A (mm)	0.20 ± 0.10	0.20 ± 0.10
B (mm)	0.25 ± 0.05	0.40 ± 0.15

## Surface Mount Multilayer Varistors


### Recommended Land Patterns:

#### MLV Series

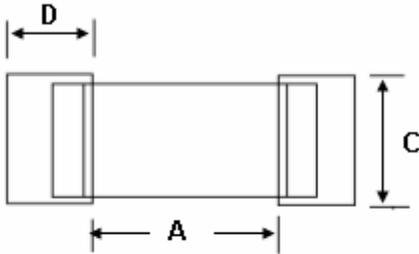

Size	Solder pad layout		
	A (mm)	C (mm)	D (mm)
0201	0.25~0.35	0.20~0.30	0.25~0.35
0402	0.4~0.6	0.5~0.6	0.5~0.7
0603	0.9~1.2	0.6~1.0	0.8~1.2
0805	1.0~1.5	1.2~1.5	1.0~1.4
1206	1.8~2.5	1.2~1.8	1.0~1.4
1210	1.8~2.5	2.2~3.0	1.0~1.4
1812	2.5~3.3	2.8~3.6	1.2~1.8
2220	3.8~4.6	4.8~5.5	1.2~1.8

#### ESD Array Series

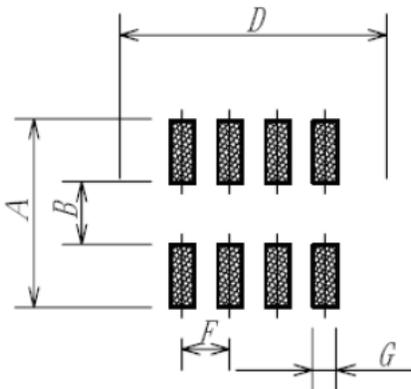

Size	A (mm)	B (mm)	D (mm)	F (mm)	G (mm)
0508	2.10	0.40	2.50	0.50	0.35
0612	2.60	0.80	3.60	0.80	0.50

## Surface Mount Multilayer Varistors


### Environmental Tests:

No.	Test	Requirement	Test condition	Test reference
1	Soldering heat resistance	BDV change $\leq \pm 10\%$ No mechanical damage	One dip at 260°C for 5 sec.	MIL-STD-202 Method 210 IEC 60068-2-20
2	Solderability	New solder coverage $\geq 80\%$	One dip at 255°C for 5 sec. Non-active flux	MIL-STD-202 Method 208 IEC 60068-2-20
3	Maximum surge current	BDV change $\leq \pm 10\%$ No mechanical damage	100 pulses of 8/20 $\mu$ s with maximum surge current and 30 sec. interval at 25°C and 30 ~ 65% RH	CECC 42000 IEC 1051-1 Test 4.5
4	Maximum surge energy	BDV change $\leq \pm 10\%$ No mechanical damage	100 pulses of 10/1000 $\mu$ s with maximum surge current and 90 sec. interval at 25°C and 30 ~ 65% RH	CECC 42000
5	Thermal cycling	BDV change $\leq \pm 10\%$ No mechanical damage Leakage current $\leq 200 \mu$ A	5 cycles between -40°C and 125°C with 30 min. dwell time at the temperature extremes and 60 min. dwell time at 25°C	CECC 42000 IEC 60068-2-14
6	Low temperature resistance	BDV change $\leq \pm 10\%$ No mechanical damage Leakage current $\leq 200 \mu$ A	1000 hr at -50°C	IEC 60068-2-1
7	Low temperature load resistance	BDV change $\leq \pm 10\%$ No mechanical damage Leakage current $\leq 200 \mu$ A	1000 hr at -50°C with working voltage applied	IEC 60068-2-1
8	High temperature resistance	BDV change $\leq \pm 10\%$ No mechanical damage Leakage current $\leq 200 \mu$ A	1000 hr at 150°C	MIL-STD-202 Method 108 CECC 42000
9	High temperature load resistance	BDV change $\leq \pm 10\%$ No mechanical damage Leakage current $\leq 200 \mu$ A	1000 hr at 85°C with working voltage applied	CECC 42000
10	Humidity resistance	BDV change $\leq \pm 10\%$ No mechanical damage Leakage current $\leq 200 \mu$ A	500 hr at 40°C and 90 ~ 95% RH	MIL-STD-202 Method 103 IEC 60068-2-3 CECC 42000;
11	Humidity load resistance	BDV change $\leq \pm 10\%$ No mechanical damage Leakage current $\leq 200 \mu$ A	500 hr at 40°C and 90 ~ 95% RH with working voltage applied	MIL-STD-202 Method 103 IEC 60068-2-3 CECC 42000
12	ESD contact test*	Varistor voltage change > 115% working voltage	Contact electrostatic discharge 100 times with 1 second intervals at 8 KV (Level 4 ) and polarity: +,-	IEC 61000-4-2
13	ESD air test*	Varistor voltage change > 115% working voltage	Air contact electrostatic discharge 100 times with 1 second intervals at 15 KV (Level 4 ) and polarity:+,-	IEC 61000-4-2

\* For ES series only.

## Surface Mount Multilayer Varistors

### Soldering Temperature Profile:

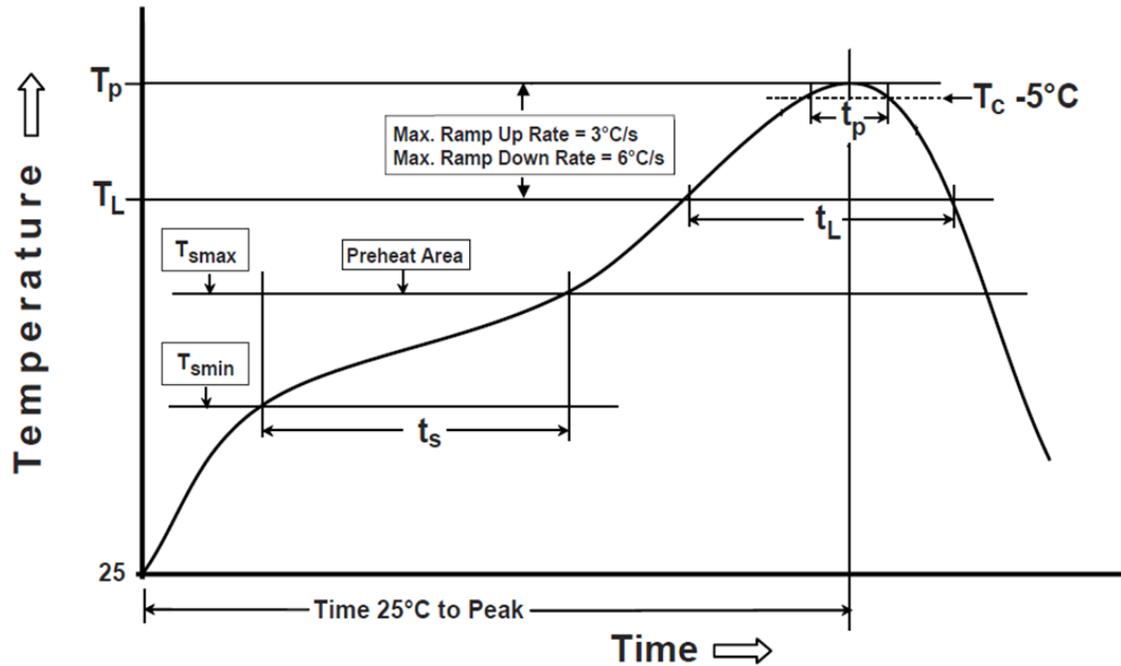

Profile Feature	Pb-Free Assembly
<b>Preheat/Soak</b> Temperature Min ( $T_{smin}$ ) Temperature Max ( $T_{smax}$ ) Time ( $t_s$ ) from ( $T_{smin}$ to $T_{smax}$ )	150°C 200°C 60~120 seconds
Ramp-up rate ( $T_L$ to $T_p$ )	3°C/second max.
Liquidous temperature ( $T_L$ ) Time ( $t_L$ ) maintained above $T_L$	217°C 60~150 seconds
Peak package body temperature ( $T_p$ )	260°C
Time ( $t_p$ )*within 5°C of the specified classification temperature ( $T_c$ )	30 seconds *
Ramp-down rate ( $T_p$ to $T_L$ )	6°C/second max.
Time 25°C to peak temperature	8 minutes max.
* Tolerance for peak profile temperature ( $T_p$ ) is defined as a supplier minimum and a user maximum	


## High Surge Protection Devices

### Super High Voltage (SV) Series

#### Features:

- Bidirectional and symmetrical V/I characteristics
- Meet IEC61000-4-5 Standard
- Large withstanding surge current capability - 200~800A (@8/20 $\mu$ s)
- Multilayer construction provides higher power dissipation


#### Surge Waveform:

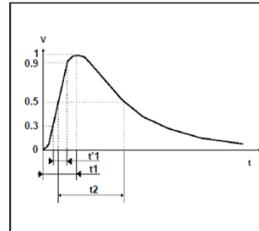

Severity Level	t1 (=1.67t <sub>1</sub> )	t2
1	8 $\mu$ s	20 $\mu$ s
2	10 $\mu$ s	1000 $\mu$ s

#### Shape and Dimensions:

Unit (mm)	1210	1812	2220	3220
Length (L)	3.2 +0.6/-0.2	4.5+0.6/-0.2	6.0 +0.7/-0.3	8.1 +0.7/-0.3
Width (W)	2.5 +0.4/-0.2	3.2+0.5/-0.2	5.3 +0.5/-0.3	5.3 +0.6/-0.3
Thickness (T)	2.60 Max.	3.50 Max.	3.60 Max.	3.70 Max.
Termination bandwidth (b)	0.5 $\pm$ 0.25	0.5+0.35/-0.1	0.5+0.35/-0.1	0.8+0.5/-0.1

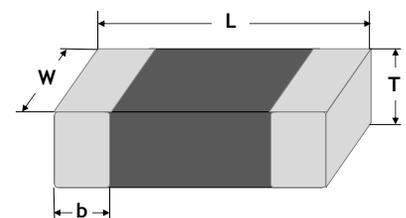

#### Product Identification:

HSP	2220	SV	390V	0800
<b>Category Code</b>	<b>Size Code</b>	<b>Application Code</b>	<b>Breakdown Voltage Code</b>	<b>Surge Current Code</b>
HSP = High Surge Protection Device	Inch (mm) 1210 (3225) 1812 (4532) 2220 (6053) 3220 (8153)	SV = Super High Voltage	390V = 390V 430V = 430V 470V = 470V	0200 = 200A 0500 = 500A 0800 = 800A

#### Electrical Characteristics:

Operating temperature: -55 to +85°C

Part Number	Size	Working Voltage		Breakdown Voltage <sup>1</sup> @1mA (V)	Clamping Voltage <sup>2</sup> (V)	Surge Current <sup>3</sup> @8/20 $\mu$ s (A)		Energy Max. @10/1000 $\mu$ s (J)	Capacitance <sup>4</sup> @1kHz (pF)	Safety Certification	
		Vac	Vdc			1 time	15 times			UL	cUL
HSP1210SV390V0200	1210	250	320	390 ( $\pm$ 10%)	647	200	100	7.2	105	✓	
HSP1812SV470V0500	1812	300	385	470 ( $\pm$ 10%)	775	500	250	23.0	200		
HSP2220SV390V0500	2220	250	320	390 ( $\pm$ 10%)	647	500	250	19.8	235	✓	
HSP2220SV430V0500	2220	275	350	430 ( $\pm$ 10%)	705	500	250	21.6	215	✓	
HSP2220SV470V0500	2220	300	385	470 ( $\pm$ 10%)	775	500	250	23.7	195	✓	
HSP2220SV390V0800	2220	250	320	390 ( $\pm$ 10%)	647	800	500	31.8	320	✓	
HSP2220SV430V0800	2220	275	350	430 ( $\pm$ 10%)	705	800	500	34.7	305	✓	✓
HSP2220SV470V0800	2220	300	385	470 ( $\pm$ 10%)	775	800	500	38.0	290	✓	✓
HSP3220SV430V0800	3220	275	350	430 ( $\pm$ 10%)	705	800	500	65.0	490	✓	✓
HSP3220SV470V0800	3220	300	385	470 ( $\pm$ 10%)	775	800	500	71.2	450	✓	✓

<sup>1</sup> The breakdown voltage was measured at 1 mA current.

<sup>2</sup> The clamping voltage was measured at standard current 1210 (2.5A), 1812 (5A), 2220 (10A) and 3220 (10A).

<sup>3</sup> The surge current was tested at 8/20  $\mu$ s waveform.

<sup>4</sup> The capacitance value only for customer reference, it's not formal specification.

## High Surge Protection Devices

### Super High Current (SC) Series

#### Features:


- SMD type – 1206~2220 sizes
- Bidirectional and symmetrical V/I characteristics
- Meet IEC61000-4-5/K21 standard
- Large withstanding surge current capability: 500~3000A (@8/20 $\mu$ s)
- Excellent low leakage current <15 $\mu$ A
- Multilayer construction provides higher power dissipation
- RoHS compliant

#### Application Fields:

- Telecom equipment RJ45, LAN connector, Ethernet
- Outdoor/Indoor AP/IAD
- Security system IP CAM
- Low voltage power line
- Base station

#### Shape and Dimensions:


Unit (mm)	1206	1210	1812	2220
Length (L)	3.2 +0.6/-0.2	3.2 +0.6/-0.2	4.5 +0.6/-0.2	6.0 +0.7/-0.3
Width (W)	1.6 +0.4/-0.2	2.5 +0.4/-0.2	3.2 +0.5/-0.2	5.3 +0.5/-0.3
Thickness (T)	1.90 Max.	2.60 Max.	3.50 Max.	3.60 Max.
Termination bandwidth (b)	0.5 $\pm$ 0.20	0.5 $\pm$ 0.25	0.5 +0.35/-0.1	0.5 +0.35/-0.1

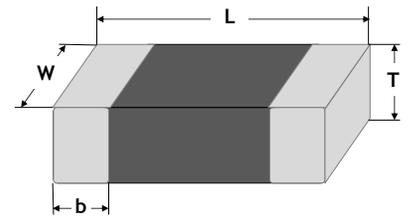

#### Product Identification:

HSP	1206	SC	012V	0500
<b>Category Code</b>	<b>Size Code</b>	<b>Application Code</b>	<b>Breakdown Voltage Code</b>	<b>Surge Current Code</b>
HSP = High Surge Protection Device	Inch (mm) 1206 (3216) 1210 (3225) 1812 (4532) 2220 (6053)	SC = Super High Current	012V = 12V 024V = 24V 047V = 47V 056V = 56V 075V = 75V 082V = 82V	0500 = 500A 1000 = 1000A 2000 = 2000A 3000 = 3000A

#### Surge Waveform:

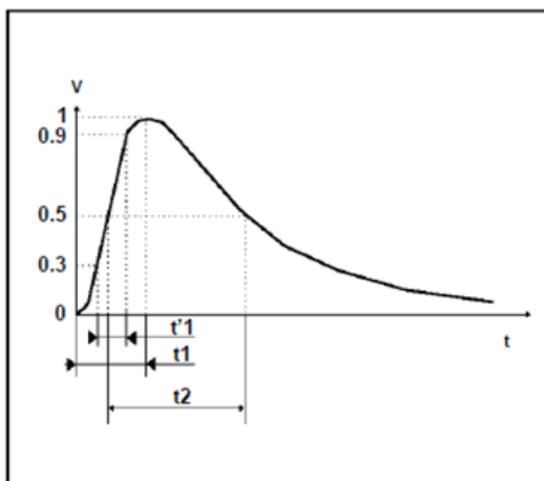

Severity Level	t1 (=1.67t'1)	t2
1	8 $\mu$ s	20 $\mu$ s

 Fig. 1 8/20  $\mu$ s surge definition

## High Surge Protection Devices

### Super High Current (SC) Series

#### Electrical Characteristics:

Part Number	Size	Working Voltage		Breakdown Voltage @1mA (V) <sup>1</sup>	Clamping Voltage (V) <sup>2</sup>	Surge Current @ 8/20µs (A) <sup>3</sup>
		VAC	VDC			
HSP1206SC012V0500	1206	6	9	12 (12~20)	<25	500
HSP1206SC024V0500	1206	14	18	24 (±10%)	<45	500
HSP1206SC047V0500	1206	30	38	47 (±10%)	<85	500
HSP1206SC075V0500	1206	48	60	75 (±10%)	<100	500
HSP1210SC024V1000	1210	14	18	24 (±10%)	<45	1000
HSP1210SC047V1000	1210	30	38	47 (±10%)	<85	1000
HSP1210SC075V1000	1210	48	60	75 (±10%)	<100	1000
HSP1812SC024V2000	1812	14	18	24 (±10%)	<45	2000
HSP1812SC047V2000	1812	30	38	47 (±10%)	<85	2000
HSP1812SC075V2000	1812	48	60	75 (±10%)	<100	2000
HSP2220SC024V3000	2220	14	18	24 (±10%)	<45	3000
HSP2220SC047V3000	2220	30	38	47 (±10%)	<85	3000
HSP2220SC056V3000	2220	35	45	56 (±10%)	<90	3000
HSP2220SC075V3000	2220	48	60	75 (±10%)	<100	3000
HSP2220SC082V3000	2220	50	65	82 (±10%)	<135	3000

<sup>1</sup> The breakdown voltage was measured at 1 mA current

<sup>2</sup> The clamping voltage was measured at standard current 1206 (1A), 1210 (2.5A), 1812 (5A) and 2220 (10A)

<sup>3</sup> The surge current was tested at 8/20 µs waveform

Part Number	Non-linear Coefficient (α)	Leakage Current (µA)		Capacitance <sup>4</sup> @ 1kHz (pF)	Response Time (T <sub>rise</sub> )	Operating Temperature (°C)
		Before Surge Test	After Surge Test			
HSP1206SC012V0500	20	10	80	3500	< 1ns	-55 to +125
HSP1206SC024V0500	20	10	80	2300		
HSP1206SC047V0500	30	10	80	690		
HSP1206SC075V0500	30	10	80	300		
HSP1210SC024V1000	20	15	80	2300		
HSP1210SC047V1000	30	10	80	1550		
HSP1210SC075V1000	30	10	80	930		
HSP1812SC024V2000	20	15	80	4500		
HSP1812SC047V2000	30	15	80	2100		
HSP1812SC075V2000	30	15	80	1650		
HSP2220SC024V3000	20	15	80	5500		
HSP2220SC047V3000	35	15	80	8000		
HSP2220SC056V3000	35	15	80	3500		
HSP2220SC075V3000	40	15	80	2000		
HSP2220SC082V3000	40	15	80	2000		

<sup>4</sup> The capacitance value only for customer reference, it's not formal specification

# High Surge Protection Devices

## Super High Network (SN) Series

### Features:


- Bidirectional and symmetrical V/I characteristics
- Meet IEC61000-4-5/K21 standard
- Large withstanding surge voltage capability: 4~6kV (@10/700 $\mu$ s)
- Excellent low leakage current <10 $\mu$ A
- Multilayer construction provides higher power dissipation

### Application Fields:

- Telecom equipment RJ45, LAN connector, Ethernet
- Outdoor/Indoor AP/IAD
- Security system IP CAM
- Low voltage power line DC12V, AC24V, PoE
- ADSL/XDSL telecom equipment
- PoE modules
- HUB switch
- VOIP phones
- Other Networks

### Shape and Dimensions:


Unit (mm)	1206	1210
Length (L)	3.2 +0.6/-0.2	3.2 +0.6/-0.2
Width (W)	1.6 +0.4/-0.2	2.5 +0.4/-0.2
Thickness (T)	1.90 Max.	2.60 Max.
Termination bandwidth (b)	0.5 $\pm$ 0.20	0.5 $\pm$ 0.25

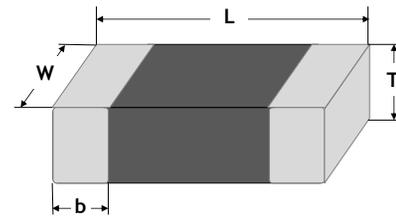

### Product Identification:

HSP	1206	SN	012V	4000
<u>Category Code</u>	<u>Size Code</u>	<u>Application Code</u>	<u>Breakdown Voltage Code</u>	<u>Surge Voltage Code</u>
HSP = High Surge Protection Device	Inch (mm) 1206 (3216) 1210 (3225)	SN = Super High Network	012V = 12V 047V = 47V 075V = 75V	4000 = 4kV 6000 = 6kV

### Surge Waveform:

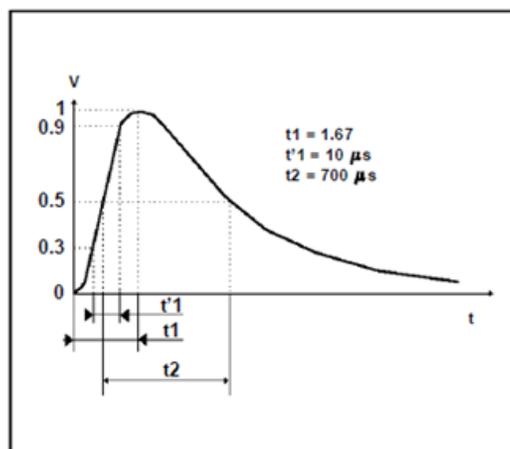

Severity Level	t1 (=1.67t'1)	t2
1	10 $\mu$ s	700 $\mu$ s

 Fig. 1 CCITT 7 10/700  $\mu$ s surge definition

## High Surge Protection Devices Super High Network (SN) Series

### Electrical Characteristics:

Part Number	Size	Working Voltage		Breakdown Voltage @1mA (V) <sup>1</sup>	Clamping Voltage (V) <sup>2</sup>	Surge Current @ 10/700µs (A) <sup>3</sup>	Surge Voltage (kV)
		VAC	VDC				
HSP1206SN012V4000	1206	6	9	12 (12~20)	< 30	100	4
HSP1206SN012V6000	1206	6	9	12 (12~20)	< 30	150	6
HSP1210SN047V4000	1210	30	38	47 (±10%)	< 75	100	4
HSP1210SN047V6000	1210	30	38	47 (±10%)	<75	150	6
HSP1210SN075V4000	1210	48	60	75 (±10%)	< 100	100	4
HSP1210SN075V6000	1210	48	60	75 (±10%)	< 100	150	6

<sup>1</sup> The breakdown voltage was measured at 1 mA current.

<sup>2</sup> The clamping voltage was measured at standard current 1206(1A) and 1210 (2.5A).

<sup>3</sup> The surge current was tested at 10/700 µs waveform, Ri=40Ω. Common-mode testing is to test all data lines while the GND.

Part Number	Non-linear Coefficient (α)	Leakage Current (µA)		Capacitance <sup>4</sup> @ 1kHz (pF)	Response Time (T <sub>rise</sub> )	Operating Temperature (°C)
		Before Surge Test	After Surge Test			
HSP1206SN012V4000	20	10	80	3200	< 1ns	-55 to +125
HSP1206SN012V6000	20	10	80	3850		
HSP1210SN047V4000	30	10	80	1400		
HSP1210SN047V6000	30	10	80	1670		
HSP1210SN075V4000	30	10	80	1000		
HSP1210SN075V6000	30	10	80	1300		


<sup>4</sup> The capacitance value only for customer reference, it's not formal specification.

<sup>4</sup> The capacitance value only for customer reference, it's not formal specification

## High Surge Protection Devices

### Construction and Materials:

Body ①	Termination ②
Nano special ceramic	Ag/Ni/Sn

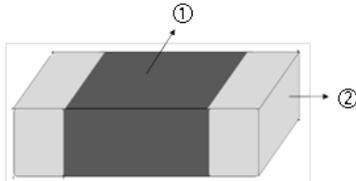

### Packaging:


Chip Size	Parts on 7 inch (178mm) Reel
1206	2,000
1210	1,500
1812	500
2220	500
3220	500

### Environmental Test:

Test item	Test condition	Requirement
High Temperature Storage	*Temperature : $125\pm 2^{\circ}\text{C}$ *Time : $1000\pm 2$ hours *Test after placing in ambient temperature for 24 hours	* Breakdown voltage change : within $\pm 10\%$ * No mechanical damage
Low Temperature Storage	*Temperature : $-40\pm 2^{\circ}\text{C}$ *Time : $1000\pm 2$ hours *Test after placing in ambient temperature for 24 hours	* Breakdown voltage change : within $\pm 10\%$ * No mechanical damage
Temperature Cycle	* Step 1 : $-40\pm 3^{\circ}\text{C}$ for $30\pm 3$ min * Step 2 : $25^{\circ}\text{C}$ for 1 hour * Step 3 : $125\pm 3^{\circ}\text{C}$ for $30\pm 3$ min * Step 4 : $25^{\circ}\text{C}$ for 1 hour * Number of cycle : 5 times *Test after placing in ambient temperature for 24 hours	* Breakdown voltage change : within $\pm 10\%$ * No mechanical damage
High Temperature Load	*Temperature : $85\pm 2^{\circ}\text{C}$ * Rated working voltage applied *Time : $1000\pm 2$ hours *Test after placing in ambient temperature for 24 hours	* Breakdown voltage change : within $\pm 10\%$ * No mechanical damage
Damp Heat Load/Humidity Load	*Temperature : $40\pm 2^{\circ}\text{C}$ * Humidity : 90~95% RH * Rated working voltage applied *Time : $500\pm 2$ hours *Test after placing in ambient temperature for 24 hours	* Breakdown voltage change : within $\pm 10\%$ * No mechanical damage


### Recommended Foot Print Dimensions:

Size	A (mm)	B (mm)	C (mm)
1206	1.8~2.5	1.2~1.8	1.5~2.0
1210	1.8~2.5	1.3~2.0	2.2~3.0
1812	2.5~2.9	1.6~2.0	3.2~3.6
2220	3.8~4.6	1.3~2.2	4.8~5.5
3220	6.2~7.0	1.6~2.6	4.8~5.8

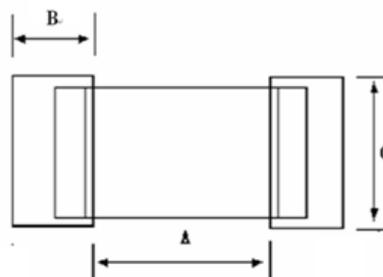

# High Surge Protection Devices

## Recommended Reflow Soldering Profile:

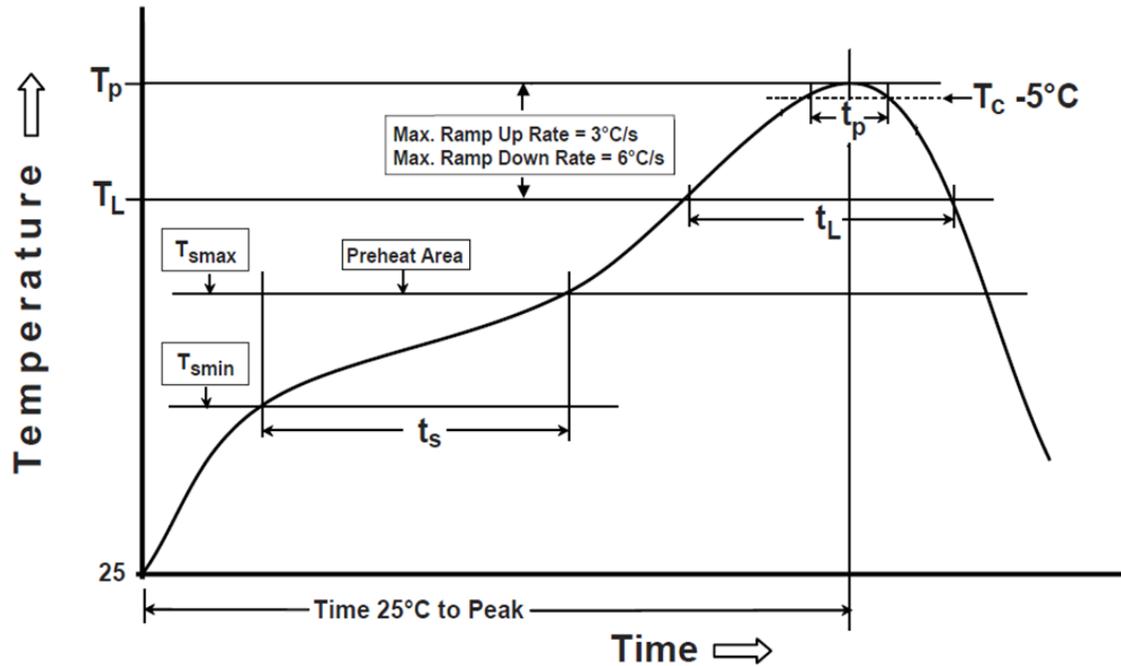

Profile Feature	Pb-Free Assembly
<b>Preheat/Soak</b> Temperature Min ( $T_{smin}$ ) Temperature Max ( $T_{smax}$ ) Time ( $t_s$ ) from ( $T_{smin}$ to $T_{smax}$ )	150°C 200°C 60~120 seconds
Ramp-up rate ( $T_L$ to $T_p$ )	3°C/second max.
Liquidous temperature ( $T_L$ ) Time ( $t_L$ ) maintained above $T_L$	217°C 60~150 seconds
Peak package body temperature ( $T_p$ )	260°C
Time ( $t_p$ )* within 5°C of the specified classification temperature ( $T_c$ )	30 seconds *
Ramp-down rate ( $T_p$ to $T_L$ )	6°C/second max.
Time 25°C to peak temperature	8 minutes max.
* Tolerance for peak profile temperature ( $T_p$ ) is defined as a supplier minimum and a user maximum	

## Storage

### Storage:

The maximum ambient temperature shall not exceed 35°C . Storage temperatures higher than 35°C could result in the deformation of packaging materials.

The maximum relative humidity recommended for storage is 75%. High humidity with high temperature can accelerate the oxidation of the solder plating on the termination and reduce the solderability of the components.

Sealed vacuum foil bags with desiccant should only be opened prior to use.

The products should not be stored in areas where harmful gases containing sulfur or chlorine are present.

Specifications and descriptions in this literature are as accurate as known at the time of printing, but are subject to change without notice. For the most updated information, please consult the factory.

Copyright © 2016 AEM Components (Suzhou) Co. Ltd.