

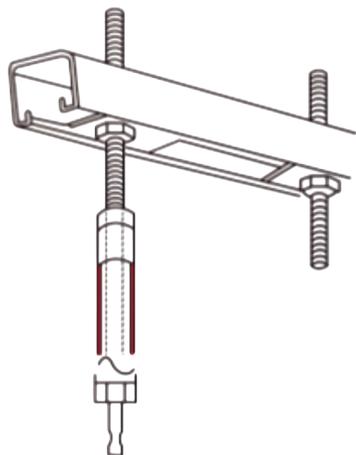


HOLLOW SOCKET 1/4 HEX BIT

Taiwan, USA, Germany, Japan, China Patent

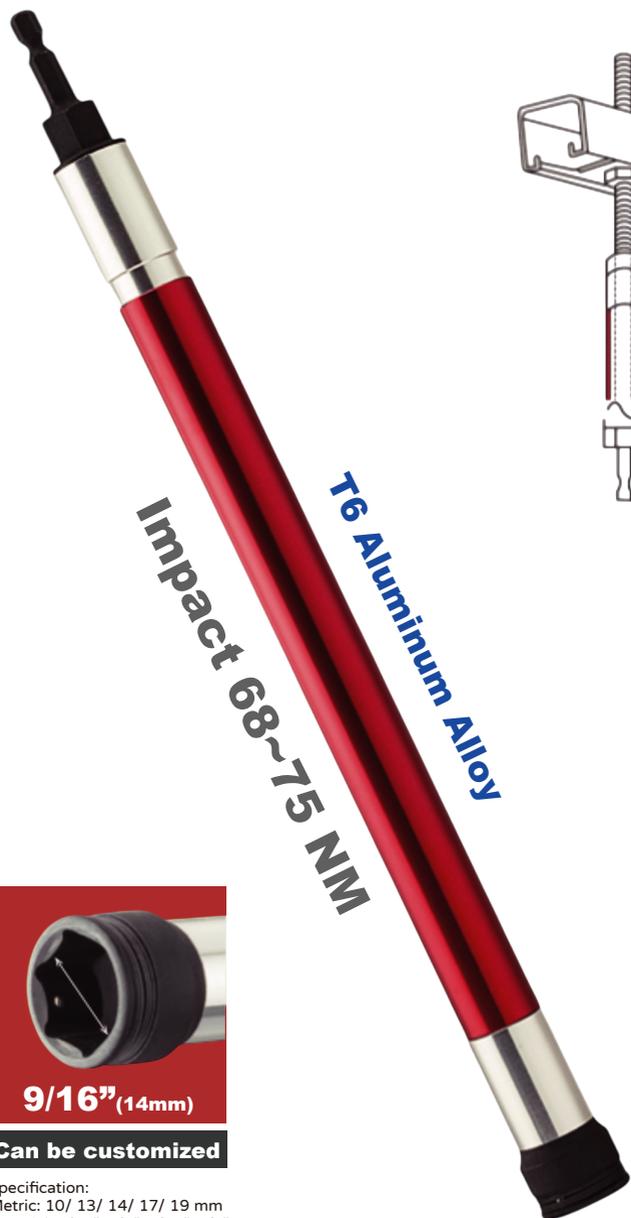

3-point positioning, auxiliary calibration

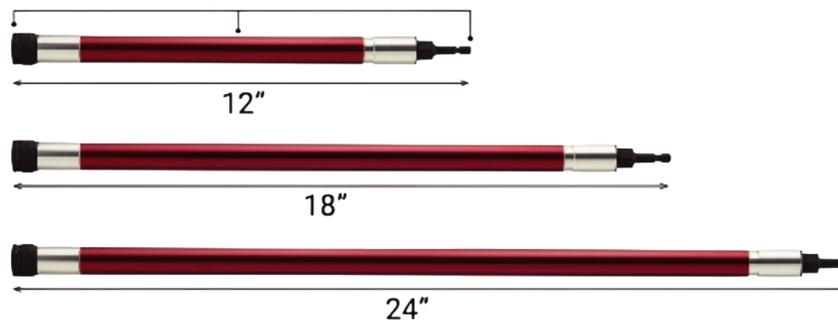

Can be customized

Specification:
Metric: 10/ 13/ 14/ 17/ 19 mm
Imperial: 7/16", 1/2", 9/16", 3/4"
Length: 8"/ 12"/ 18"/ 24"/ 42"

Threaded Rod Nut Driver

長螺栓空心軸長接桿(手/電動)

T6 Aluminum Alloy Sleeve
Spring & Ball detent for nut
14mm Hex with Wrench assist
1/4" Hex Bits Driver

