

Pre Formed Strap



The **PFS** is an engineered strap that has been designed to provide enhanced performance and greater flexibility of use.

Features & Benefits

- Typically used for lateral restraint in floor and roof applications
- Exceeds performance of traditional 30 x 5mm strap

Material Specification

- 35 x 1.5mm Galvanised mild steel - Z600 or Z275 (with edge protection)

Approvals


- CE marked and tested in accordance with EN846-4
- Meets NHBC Technical requirements
- Meets Homebond technical requirements

Fixings

Dependant on application

Code	Description	Box Qty
547389	3.4 x 35mm Square Twist Nails - LOOSE	500
141185	3.4 x 35mm Square Twist Nails - COLLATED*	2,500


*For use with Paslode PPN35Ci

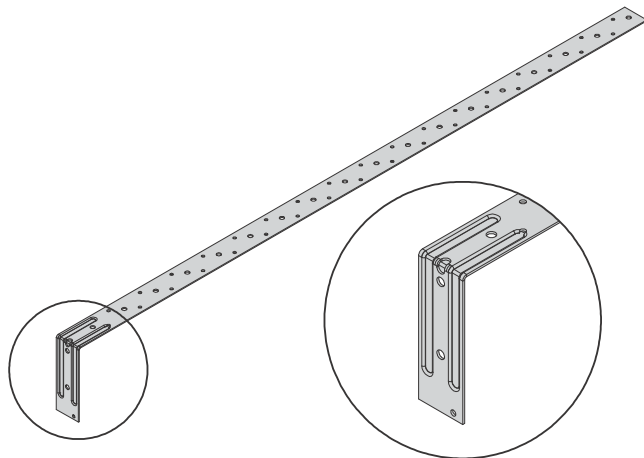

Engineered bend for increased performance


Available Sizes

FLAT STRAP



Product Code	F (mm)
PFS-1000-F	1000
PFS-1200-F	1200
PFS-1600-F	1600
PFS-2000-F	2000


BENT STRAP

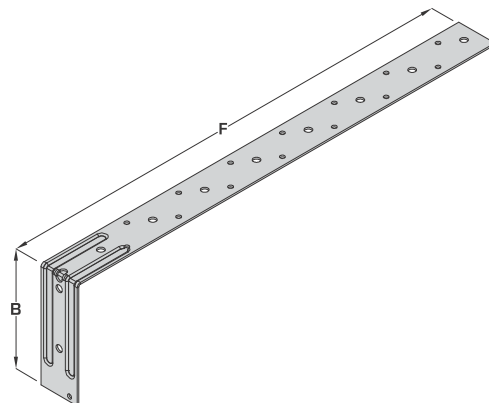

Product Code	F (mm)	B (mm)
PFS-900-100-B	900	100
PFS-1100-100-B	1100	100
PFS-1500-100-B	1500	100
PFS-1900-100-B	1900	100

Dimensions (mm)

4mm Ø and 6mm Ø holes

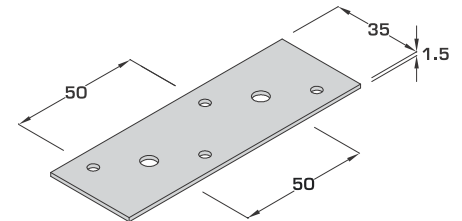

Load Data

Performance	Fixings	Characteristic Tensile Capacity (kN)
	(3.4 x 35mm)	
Built into 3.5N/mm ² block work & nailed to min C16 grade timber**	8No	8.80
Flat Strap	n/a	10.80

**Full storey of block work required above the strap to meet performance.