

IFS-802GS

Industrial Fast Ethernet Switch

8x FE RJ45 + 2x 1000Base-X SFP

- » Provides a DIP-Switch to Set Functions
- » Supports Power Failure Alarm Message by Relay
- » 12/24/48VDC (9.6~60VDC) Redundant dual Power input
- » EN50121-4, EN61000-6-2, EN61000-6-4, CE and FCC Certified



The industrial unmanaged Ethernet switch IFS-802GS provides stable and reliable Ethernet transmission, features 8 ports 10/100Base-TX UTP and equipped with 2 1000Base-X SFP slots. Housed in rugged enclosures, designed for harsh environments, fanless, high MTBF, supports wide operating temperature, and redundant 12/24/48VDC power input, it is suitable for heavy-duty applications such as industrial networking, intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications.

Features


- Wide operating temperature -40 ~ 75°C (-E model)
- IP30, rugged metal housing and fanless

Specifications

Standard	IEEE 802.3	10Base-T Ethernet
	IEEE 802.3u	100Base-TX and 100Base-FX Fast Ethernet
	IEEE 802.3z	1000Base-X Gigabit Ethernet over fiber-optic
	IEEE 802.3x	Flow Control and Back Pressure
Switch Architecture	Back-Plane (Switching Fabric): 5.6Gbps (Full Wire-Speed)	
Data Processing	Store and Forward	
Transfer Rate	14,880pps for Ethernet port	
	148,800pps for Fast Ethernet port	
	1,488,000pps for Giga Ethernet port	
Flow Control	IEEE 802.3x flow control, back pressure flow control	
MAC Address Table	8K	
Packet Buffer Size	1024Kbit	
Network Connector	8x RJ-45, 2x SFP	
	RJ-45 Port: Auto MDI/MDI-X function, 10/100Base-TX auto negotiation speed, Full/Half duplex	
	2x 1000Base-X SFP port	
Network Cable	UTP/STP Cat. 5e cable or above	
	EIA/TIA-568 100-ohm (100meter)	
Fiber Cable	Fiber Cable (Single-mode): 8/125um~10/125um	
	Wavelength: 1310nm (Multi-mode/Single-mode)	
	SFP: Distance depend on SFP Fiber Transceiver	

Protocol	CSMA/CD
LED	System: Power 1 (Green), Power 2 (Green), Fault (Amber) UTP: Link/Active (Green), Speed 100 (Yellow) SFP Slot : Link/Active (Green)
DIP SW	DIP 1 OFF : Enable power failure alarm ON : Disable DIP 2 Reserve
Reverse Polarity Protection	Supported for Power Input
Overload Current Protection	Supported
Power Supply	Redundant Dual DC 12/24/48V (9.6~60VDC) Input power (Removable Terminal Block)
Power Consumption	4.4W
Alarm Relay Contact	Relay outputs with current carrying capacity of 1A @24VDC, NC
Removable Terminal Block	Provides 2 Redundant power, Alarm relay contact, 6 Pin
Operating Temperature	-10 ~ 60°C (IFS-802GS) -40 ~ 75°C (IFS-802GS-E)
Operating Humidity	5% to 95% (Non-condensing)
Storage Temperature	-40 ~ 85°C
Housing	Rugged Metal, IP30 Protection and Fanless
Dimensions	106 x 72 x 152mm (D x W x H)
Weight	0.67kg
Installation Mounting	DIN Rail mounting or wall mounting (Optional)
MTBF	837,414 Hours (MIL-HDBK-217)
Certification	
EMC/EMS	CE (EN55032, EN55035)
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE
Railway Traffic	EN50121-4
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6

Dimensions

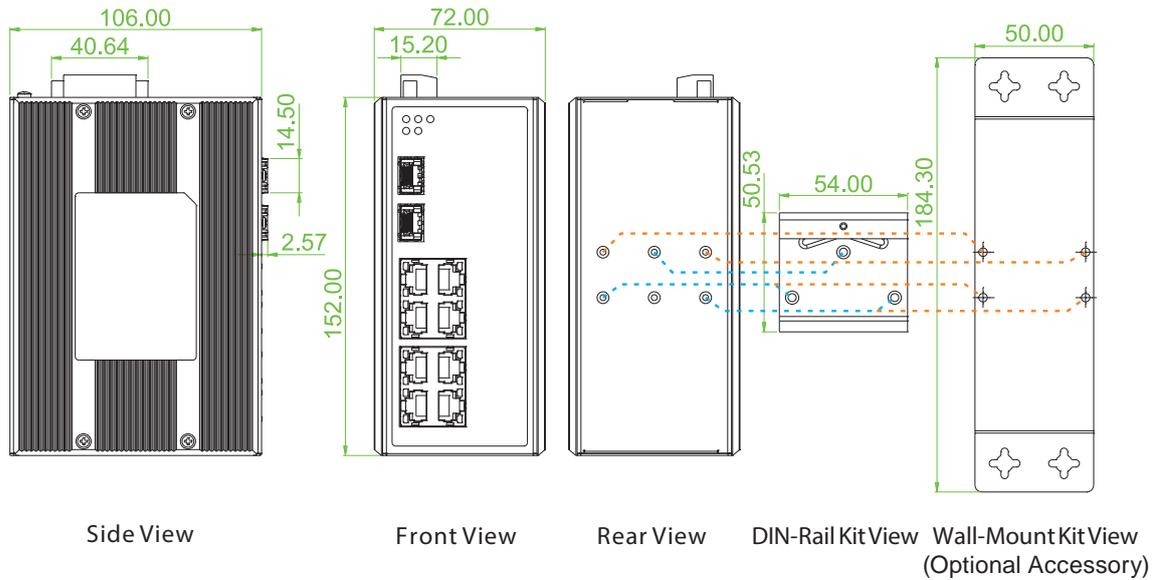

Ordering Information

Model Name	Total Port	RJ45		SFP		Certification		Operating Temperature
		10/100Base-TX	1000Base-X	EN50121-4	EN61000-6-2, EN61000-6-4	CE, FCC		
IFS-802GS	10	8	2	V	V	V	-10~60°C	
IFS-802GS-E	10	8	2	V	V	V	-40~75°C	

Optional Accessories

■ Wall Mount Kit

IND-WMK02	Wall Mount kit for Industrial product, 184 x 50mm (Wide)
-----------	--

■ Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with all CTC Union industrial grade Ethernet switches for guaranteed compatibility and performance. Best performance can be guaranteed, even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheets for more items and detailed information.)

ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-T7T00-00-(E)	Industrial SFP 10/100/1000Base-T UTP 100meter, -10~70°C (-40~85°C)

■ Industrial Power Supply

MDR-20-24	Industrial Power, Input 85 ~ 264VAC/120 ~ 370VDC, Output 24VDC, 24W, -20 ~ 70°C
MDR-40-48	Industrial Power, Input 85 ~ 264VAC/120 ~ 370VDC, Output 48VDC, 40W, -20 ~ 70°C