

# IMC-100

## Industrial Fast Ethernet Media Converter

### 1x FE RJ45 to 1x 100Base-FX Fiber (ST/SC)

- » Supports LFPT (Link Fault Pass Through) and FEF (Far End Fault)
- » Provides a DIP-Switch to Set Functions
- » Supports Power Failure Alarm Message by Relay
- » 12/24/48VDC (9.6~60VDC) Redundant Dual Power input
- » UL60950-1, EN50121-4, EN61000-6-2, EN61000-6-4, CE and FCC Certified



The industrial grade unmanaged 100M Ethernet media converter that supports conversion between electrical 10/100Base-TX and optical 100Base-FX Ethernet. Housed in rugged DIN rail or wall mountable enclosures, the converter is designed for harsh environments, such as industrial networking and intelligent transportation systems (ITS) and is also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications. Wide operating temperature range models (-40 to 75°C) fulfill the special needs of industrial automation applications.

## Features

- IP30 rugged metal housing and fanless
- Wide operating temperature -40 ~ 75°C
- Store-and-Forward mode and Pass Through mode (set by DIP SW)
- Conversion between 10/100Base-TX and 100Base-FX cable interface


## Specifications

<b>Standard</b>	IEEE 802.3	10Base-T 10Mbit/s Ethernet
	IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet
	IEEE 802.3x	Flow Control
<b>RJ45 Ports</b>	10/100Base-TX Auto MDI/MDI-X and Auto-Negotiation Function Supports UTP CAT.5e Twisted Pair Cable	
<b>Fiber Ports</b>	100Base-FX (SC/ST connectors)	
<b>Switch Architecture</b>	Store and Forward in Switch mode	
	Supports 1024 MAC addresses in Switch mode	
<b>Ethernet Packet length</b>	2046Byte (Max) in Switch mode	
<b>Jumbo Frame</b>	9K bytes in Pass through (Converter mode)	
<b>Fiber Parameters</b>	Fiber Cable (Multi-mode): 50/125um, 62.5/125um	
	Fiber Cable (Single-mode): 9/125um	
	Wavelength: 1310nm (Multi-mode/Single-mode)	
<b>Link Fault Pass Through (LFPT)</b>	Available distance: 2KM (Multi-mode) / 30KM (Single-mode) / 50KM (Single-mode)	
	TX- Fiber: If TX port link down, the media converter will force Fiber port to link down	
	Fiber-TX: If Fiber port link down, the media converter will force TX port to link down	
<b>Far-End Fault (FEF)</b>	Work with LFPT to prevents data loss	



<b>DIP Switch</b>	<b>TP Auto Negotiation</b> OFF: Auto Mode / ON: Force Mode <b>Force TP Speed</b> OFF: 100 Mbps / ON: 10 Mbps <b>Force TP Duplex</b> OFF: Full Duplex / ON: Half Duplex <b>LFPT</b> ON: Enables LFPT (Link Fault Pass Through) / OFF: Disables LFPT (Link Fault Pass through) <b>Flow control</b> ON: Flow control enable / OFF: Flow control disable <b>Mode</b> OFF: Switching mode / ON: Pass through converter mode
<b>Connector</b>	Fiber SC (Multi-mode, 2km), SC (Single-mode, 30km, 50KM) ST (Multi-mode, 2km), ST (Single-mode, 30km, 50KM) RJ-45 Socket: CAT.5e (10/100Mbps) Twisted Pair cable Auto MDI/MDI-X and Auto-Negotiation Function
<b>LED</b>	<b>PWR 1 (Green):</b> ON: Power1 active / OFF: Power1 is inactive <b>PWR 2 (Green):</b> ON: Power2 active / OFF: Power2 is inactive <b>Fault (Red):</b> ON: Fiber or TP has failed / OFF: TP are functional <b>Fiber (Green):</b> ON : Connected to network / OFF: Not connected to network, BLK: Receive/Transmit data <b>100 (Amber):</b> ON: 100Mbps / OFF: 10Mbps <b>LAN (Green):</b> ON : Connected to network / OFF: Not connected to network, BLK: Networking is active
<b>Reverse Polarity Protection</b>	Supported for power input
<b>Overload Current Protection</b>	Supported
<b>Power Supply</b>	12/24/48VDC(9.6~60VDC), Redundant power with polarity reverse protect function and removable terminal block
<b>Alarm Relay Contact</b>	Relay outputs with current carrying capacity of 1A @24VDC
<b>Removable Terminal Block</b>	Provides 2 redundant power, alarm relay contact
<b>Power Consumption</b>	2.9 W
<b>Operating Humidity</b>	5% ~ 95% (Non-condensing)
<b>Operating Temperature</b>	-40 ~ 75°C
<b>Storage Temperature</b>	-40 ~ 85°C
<b>Housing</b>	Rugged Metal, IP30 Protection and fanless
<b>Dimensions</b>	106 x 38.6 x 142.1mm (D x W x H)
<b>Weight</b>	0.62kg
<b>Installation</b>	DIN Rail mounting or wall mounting (Optional)
<b>MTBF</b>	1,199,572 Hours (MIL-HDBK-217)
<b>Certification</b>	
<b>EMI</b>	CE
<b>EMI (Electromagnetic Interference)</b>	FCC Part 15 Subpart B Class A, CE
<b>Railway Traffic</b>	EN50121-4
<b>Immunity for Heavy Industrial Environment</b>	EN 61000-6-2
<b>Emission for Heavy Industrial Environment</b>	EN 61000-6-4
<b>EMS (Electromagnetic Susceptibility) Protection Level</b>	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
<b>Safety</b>	UL60950-1
<b>Shock</b>	IEC 60068-2-27
<b>Freefall</b>	IEC 60068-2-32
<b>Vibration</b>	IEC 60068-2-6

## Dimensions

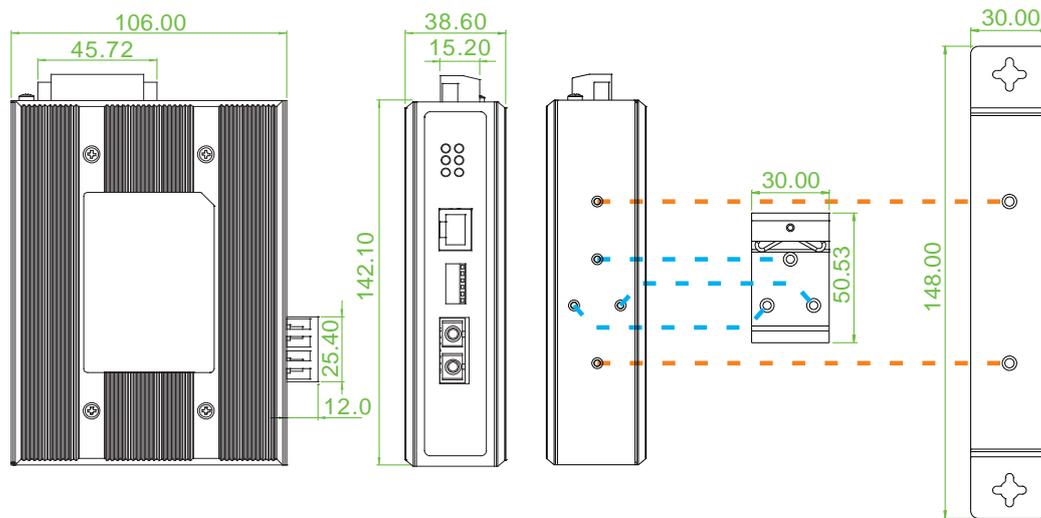

Side View

Front View

Rear View

DIN-Rail Kit View

Wall-Mount Kit View  
(Optional Accessory)

## Ordering Information

Model Name	RJ45	SC/ST	Power Input	Certification				Operating Temperature
	10/100Base-TX	100Base-FX	Redundant	UL60950-1	EN50121-4	EN61000-6-2 EN61000-6-4	CE FCC	
IMC-100-E	1	1	12/24/48VDC	V	V	V	V	-40~75°C

Connector Type	Connectivity Distance		
SC, ST	002:2km (M/M)	030:30km (S/M)	050:50km (S/M)
	020A: WDM 20km A type (TX:1310nm)		
	020B: WDM 20km B type (TX: 1550nm)		

\* MOQ is requested for ST type

## Optional Accessories

### ■ Wall Mount Kit

IND-WMK01	Wall Mount kit for Industrial product, 184 x 30mm
-----------	---

### ■ Industrial Power Supply

MDR-20-24	Industrial Power, Input 85 ~ 264VAC/120 ~ 370VDC, Output 24VDC, 24W, -20 ~ 70°C
MDR-40-48	Industrial Power, Input 85 ~ 264VAC/120 ~ 370VDC, Output 48VDC, 40W, -20 ~ 70°C