

# GSW-4424MP

## L2+ Managed PoE Switch

**24 × GbE/RJ45 + 4 × 1G/10G SFP+ with 24 × PoE+ (450W)  
L2+ Managed Ethernet Switch**



The high-density version of managed power over Ethernet switch in best cost performance ratio, GSW-4424MP, is designed for SMB and enterprise network application. Each Ethernet copper port complies with IEEE 802.3at standard to supply 30W power injection maximum. The 10G uplink ports relieve the insufficiency of Gigabit links to offer instantly demanding bandwidth consumption for PoE powered FHD/UHD IPcam surveillance, WiFi network access and VoIP telephony deployed in the enterprise network.

The GSW-4424MP is equipped with 24 × Gigabit RJ45 ports and 4 × 1G/10G SFP+ based fiber optics ports. It is featured completely L2+ switch functionality which guarantees high network availability, secured robust network access and comprehensive QoS in the network edge. Also, the GSW-4424MP can be managed by CTC in-house developed Smartview EMS, which offers a user-friendly and centralized device management platform. It makes the administrators be able to monitor and configure the switches remotely.

### Features


- 24 × RJ45/PoE+ ports with 450W power budget totally
- Cable diagnostics to test UTP cable or determine broken point distance
- Text based CLI configuration download and upload
- Advanced PoE management
  - PoE PD failure auto check and reset if PD failed
  - PoE port on/off scheduling
  - PoE configuration for power planning

### Specifications

<b>Interface</b>	Fiber port: 4x 1G/10Gbps SFP+ uplink Copper port: 24x 10/100/1000Base-T RJ45 Management port: 1x 10/100/1000Base-T RJ45 Console port: 1x RS-232 in RJ45	
<b>PoE Power Budget</b>	450W	
<b>Switching Fabric Capacity</b>	128Gbps	
<b>Packing Forwarding Rate</b>	14880pps	@10Mbps
	148800pps	@100Mbps
	1488000pps	@1000Mbps
	14880000pps	@10Gbps
<b>Transmission Method</b>	Store and Forward Switching	
<b>Packet Buffer</b>	32M bits	
<b>MAC Table Size</b>	32K	
<b>Jumbo Frame Size</b>	10K Bytes	
<b>VLAN Feature</b>	IEEE 802.1Q tagged VLAN (4K VLAN groups), IEEE 802.1ad QinQ VLAN, Voice VLAN MAC based VLAN, Protocol based VLAN, IP subnet based VLAN, Private VLAN for port isolation VLAN translation, GVRP (GARP VLAN registration protocol)	
<b>Link Aggregation</b>	Static trunk (SA, DA, IP, TCP/UDP port), IEEE 802.3ad LACP 14 LACP trunk groups Max; 8 port Max. per LACP trunk group	
<b>L2 Switching Protection</b>	IEEE 802.1D STP/IEEE 802.1w RSTP/IEEE 802.1s MSTP, Loop Protection	
<b>QoS Feature</b>	Hard wired IEEE 802.1p 8 priority queues per port, Traffic scheduling based on strict/WRR priority CoS based traffic classification on switch port, VLAN, ID, DSCP, TCP/UDP port, IEEE 802.1p priority tag remarking DSCP remarking, Per port/queue based ingress/egress rate limit in steps of 100kbps, IEEE 802.3x flow control Multicast/Broadcast/Unicast storm policing with flooding control	

<b>Security</b>	Static port security (MAC based), Per port limited MAC learning Port based/MAC base/single/multiple IEEE 802.1x access control, 512 ACL rules based on L2~L4 information RADIUS/TACACS+ AAA, HTTPs & SSH v2, IP/MAC binding, IP source guard & ARP inspection
<b>IP Multicasting</b>	IGMP snooping v1/v2/v3, IGMP proxy, MLD snooping v1/v2, IGMP fast leave IGMP query, IGMP filtering/throttling, MVR (Multicast VLAN Registration)
<b>Management</b>	WebGUI/Telnet CLI interface, SNMP v1/v2c/v3, RMON I (1,2,3,9 groups), RFC1213 MIB II, Private MIB DHCP client/snooping/relay option 82, TFTP/HTTP based firmware and configuration upgrade, Port mirroring RSPAN, Event syslog server, DNS client/proxy, NTPv4 client, UPnP, IPv4/IPv6 management SFF-8472 DDMI, IEEE 802.1ab LLDP, Text based CLI configuration download and upload
<b>Advanced PoE Management</b>	PoE PD failure auto check and reset if PD failed, PoE port on/off failure, PoE port enable/disable Power limit by PD classification, Totally PoE power budget limitation (450W maximum), Power feeding priority
<b>Power Input</b>	AC power input (100~240V)
<b>Power Consumption</b>	490 Watts @ PoE full load
<b>Operating Temperature</b>	0~50°C
<b>Storage Temperature</b>	-25~70°C
<b>Humidity</b>	5%~95% (non-condensing)
<b>Dimension</b>	440 × 280 × 43.5 mm (W×D×H)
<b>Certification</b>	CE, FCC class A

## Application

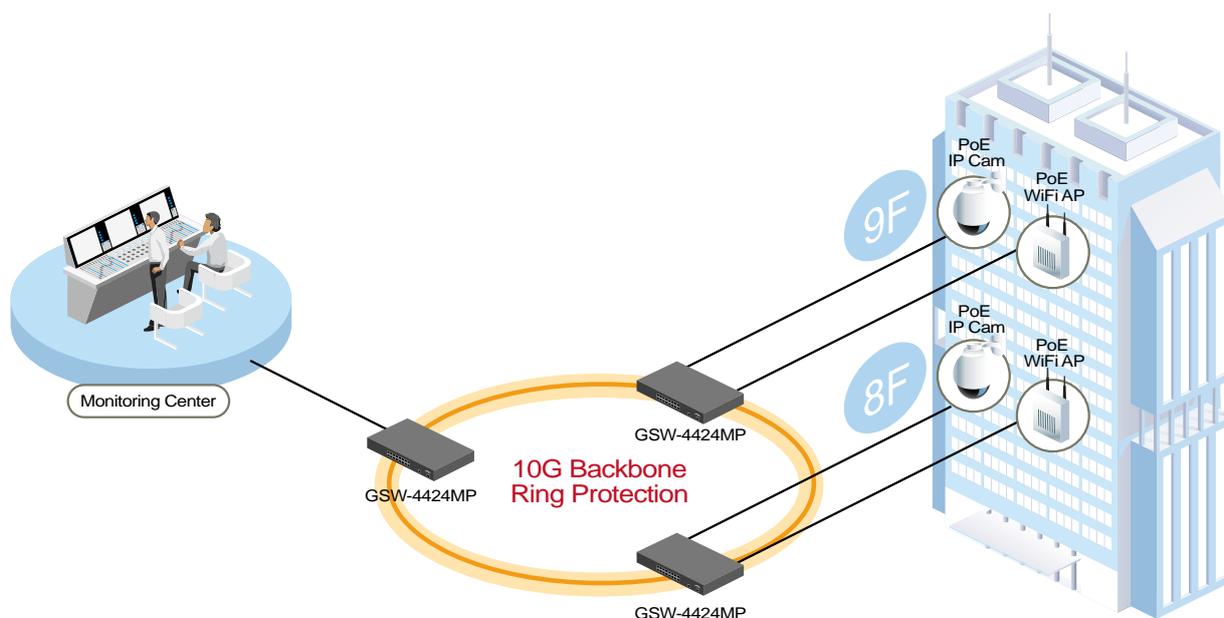

## Ordering Information

Model Name	Description
GSW-4424MP	24 × GbE/RJ45, PoE+ + 4 × 1G/10G SFP+ L2+ Managed PoE Switch

## Optional Accessory

### - 10G SFP+ Transceiver Module

Model Name	Description
SFM-1000-SR85	10G SFP+ SR/SW MMF 300m, 850nm VCSEL, 10G Ethernet/FC/SDH/SONET
SFS-1010-LR31	10G SFP+ LR/LW SMF 10km, 1310nm DFB DML, 10G Ethernet/FC/SDH/SONET
SFS-1040-ER55	10G SFP+ ER/EW SMF 40km, 1550nm DFB EML, 10G Ethernet/FC/SDH/SONET
SFS-1080-ZR55	10G SFP+ ZR/EW SMF 80km, 1550nm DFB EML, 10G Ethernet/FC/SDH/SONET