

# ITP-12164XTM-12PH EN50155 Managed 10G PoE Switch

**12x FE M12 with 8x PoE + 16x GbE M12 with 4x PoE and 4x 10G M12, 80W, 24/48/72/110VDC**

- » 24/48/72/96/110VDC Redundant Dual Isolated Power Input
- » Regulated PoE Output Voltage
- » Auto Checking and Auto Reset when PoE PD Fail
- » EN50155, EN50121-4, EN45545-2, EN61000-6-2, EN61000-6-4, CE and FCC Certified



The EN50155 certified managed PoE switch ITP-12164XTM-12PH, that provides 4 10Gigabit, 16 Gigabit M12 X-code Ethernet ports and 12 Megabit M12 D-code, features total 12 ports PoE and supports a variety of PoE operation functions, including automatic detection of PoE device power, automatic reset, PoE scheduling, etc.

Designed for heavy industrial, vehicle and rolling stock applications, utilizing M12 connectors to ensure secure connections and reliable operation, withstand environmental disturbances such as vibration and shock, uses M12 K-code connector 24/48/72/110VDC switching power input design compatible with variety railway and vehicle's power source requirement. EN50155 certification covers operating temperature, mains input voltage, surge, ESD, vibration and shock, making the switch suitable for vehicle, rolling stock applications.

## Features

- M12 (D-code, X-code, K-code) connector against vibration and shock, M12 D-code for FE port, X-code for GbE or 10G port, K-code for power
- Cable diagnostics, identifies opens/shorts distance
- STP, RSTP, MSTP, ITU-T G.8031 ERP, ITU-T G.8032 Ethernet Protection Ring (ERPS) for redundant cabling
- Provides up to 5 instances that each supports μ-Ring, μ-Chain or Sub-Ring type for flexible uses.  
(Please see CTC Union's μ-Ring white paper for more details)
- μ-Ring for Redundant Cabling, recovery time<50ms in 250 maximum devices
- Supports TTDP for train application
- Supports EMS Management

## Specifications

Standard		
IEEE 802.3		10Base-T 10Mbit/s Ethernet
IEEE 802.3u		100Base-TX, 100Base-FX, Fast Ethernet
IEEE 802.3ab		1000Base-T Gbit/s Ethernet over twisted pair
IEEE802.3an		10GBase-T 10G bit/s Ethernet over twisted pair
IEEE 802.1d		STP (Spanning Tree Protocol)
IEEE 802.1w		RSTP (Rapid Spanning Tree Protocol )
IEEE 802.1s		MSTP (Multiple Spanning Tree Protocol)
ITU-T G.8032 / Y.1344		ERPS (Ethernet Ring Protection Switching)
ITU-T G.8031 / Y.1342		EPS (Ethernet Protection Switching)
IEEE 802.1Q		Virtual LANs (VLAN)
IEEE 802.1X		Port based and MAC based Network Access Control, Authentication
IEEE 802.3ac		Max frame size extended to 1522Bytes
IEEE 802.3ad		Link aggregation for parallel links with LACP (Link Aggregation Control Protocol)
IEEE 802.1AX		Link aggregation for parallel links with LACP (Link Aggregation Control Protocol)
IEEE 802.3x		Flow control for Full Duplex
IEEE 802.3af		PoE (Power over Ethernet)

Standard	IEEE 802.3at	PoE+ (Power over Ethernet ehancements)		
	IEEE 802.1ad	Stacked VLANs, Q-in-Q		
	IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization		
	IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)		
	IEEE 802.3az	EEE (Energy Efficient Ethernet)		
VLAN ID	4094 IEEE802.1Q VLAN ID			
Switch Architecture	114.4Gbps (Full wire-speed)			
Data Processing	Store and Forward			
Flow Control	IEEE 802.3x for full duplex mode Back pressure for half duplex mode			
PoE Port	12x PoE port (8x PoE for D-code FE port, 4x PoE for X-code GbE port) Maximum PoE output power budget 80W (30W/port), Regulated PoE output voltage at 52VDC IEEE 802.3af / IEEE 802.3at End-Span, Alternative A mode			
Network Connector	12x M12 D-code Female for 10/100Base-TX UTP, with 8x PoE 16x M12 X-code Female for 10/100/1000Base-T UTP, with 4x PoE 4x M12 X-code Female for 100/1G/2.5G/5G/10G Base-T UTP UTP port provides auto negotiation speed, Auto MDI/ MDI-X, Full/Half duplex function 4x 10G UTP port for 2 set bypass			
Console	RS-232 (5-pin A-Code M12 male )			
2x Rotary Switch (0~15)	1 for Switch IP setting, 1 for Gateway IP setting			
Network Cable	UTP/STP Cat. 5e cable or above			
	EIA/TIA-568 100-ohm (100meter)			
Protocols	CSMA/CD			
Reverse Polarity Protection	Supported			
Overload Current Protection	Supported			
CPU Watch Dog	Supported			
LED	System: Power 1 (Green), Power 2 (Green), Fault (Amber), CPU Act (Green), Ring Master (Amber)			
	UTP: 10/100/1G/2.5G/5G Link/Active (Green), 10G Link/Active (Blue)			
	PoE : ON (Green)			
Jumbo Frame	10KB			
MAC Address Table	32K			
Memory Buffer	4M Bytes for packet buffer			
Device Memory	128M Bytes Flash ROM, 1G Bytes RAM			
Power Supply	Provides 1x M12 K-code (5-Pin, male) for redundant dual isolated DC 24/48/72/96/110VDC wide input power Regulated PoE output voltage (52VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100meter			
Power Consumption	Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget
	24 VDC	136W	49W	80W
	48 VDC	129W	48W	80W
	110 VDC	128W	48W	80W
Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay			
Alarm Relay Contact	5-pin M12 A-code male, Relay outputs with current carrying capacity of 1A @24VDC			
Operating Temperature	-40 ~ 60°C			
Operating Humidity	5% to 95% (Non-condensing)			
Storage Temperature	-40 ~ 85°C			
Housing	Rugged Metal, Fanless and IP40 grade housing protection			
Dimensions	128 x 418 x 207mm (D x W x H)			
Weight	8.1Kg			
Installation Mounting	Wall mounting			
MTBF	90,646Hours (MIL-HDBK-217)			
Certification				
EMC	CE (EN55035, EN55032)			
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE			
Railway Traffic	EN50155, and EN50121-4			

<b>Fire protection of railway vehicles</b>	EN 45545-2
<b>Immunity for Heavy Industrial Environment</b>	EN61000-6-2
<b>Emission for Heavy Industrial Environment</b>	EN61000-6-4
<b>EMS (Electromagnetic Susceptibility) Protection Level</b>	EN61000-4-2 (ESD) Level 3, Criteria B
	EN61000-4-3 (RS) Level 3, Criteria A
	EN61000-4-4 (Burst) Level 3, Criteria A
	EN61000-4-5 (Surge) Level 3, Criteria B
	EN61000-4-6 (CS) Level 3, Criteria A
	EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
<b>Shock</b>	IEC-61373
<b>Freefall</b>	IEC 60068-2-32
<b>Vibration</b>	IEC-61373

## Software Specifications

### Topology

<b>VLAN</b>	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN ID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN (Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries Private VLAN for port isolation GVRP (GARP VLAN Registration Protocol) MVR (Multicast VLAN Registration) Voice VLAN
<b>Link Aggregation (Port Trunk)</b>	Static (Hash with SA, DA, IP, TCP/UDP port), up to 16 trunk group Dynamic (IEEE 802.3ad LACP), up to 16 trunk group Support IEEE802.1AX passive and active mode
<b>Spanning Tree</b>	IEEE802.1d STP, IEEE802.1w RSTP, IEEE802.1s MSTP
<b>Multiple <math>\mu</math>-Ring</b>	Up to 5 instances that each supports $\mu$ -Ring, $\mu$ -Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings. Recovery time <50ms The maximum number of device is allowed 250 nodes in a Ring.
<b>Loop Protection</b>	Supported
<b>ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)</b>	Recovery time <50ms Single Ring, Sub-Ring, Multiple ring topology network
<b>ITU-T G.8031 / Y.1342 EPS (Ethernet Protection Switching)</b>	Supported
<b>QoS Feature</b>	
<b>Class of Service</b>	IEEE802.1p 8 active priorities queues per port
<b>Traffic Classification QoS</b>	IEEE802.1p based CoS
	IP Precedence based CoS
	IP DSCP based CoS
	QCL (QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI, Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
<b>Bandwidth Control for Ingress</b>	100~1,000,000 when the "Unit" is "kbps", and 1~1,000 when the "Unit" is "Mbps"
<b>Bandwidth Control for Egress</b>	100~1,000,000 when the "Unit" is "kbps", and 1~1,000 when the "Unit" is "Mbps"
	Rate Unit : bit Per queue / Port shaper
<b>DiffServ (RF 2474) Remarking</b>	
<b>Storm Control</b>	For Unicast, Broadcast and Multicast

**IP Multicasting Feature**

<b>IGMP / MLD Snooping</b>	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2
	Port Filtering Profile, Throttling
	Fast Leave
	Maximum Multicast Group : up to 1022 entries
	Query / Static Router Port

**Security Features**

<b>IEEE 802.1X</b>	Port-Based, MAC-Based
<b>ACL</b>	Number of rules : up to 256 entries for L2 / L3 / L4 L2: Mac address SA/DA/VLAN L3: IP address SA/DA, Subnet L4: TCP/UDP
<b>RADIUS</b>	Authentication & Accounting
<b>TACACS+</b>	Authentication, Authorization, Accounting
<b>HTTPS, HTTP</b>	Supported
<b>SSL / SSH v2</b>	Supported
<b>User Name Password Authentication</b>	Local Authentication
	Remote Authentication (via RADIUS / TACACS+)
<b>Management Interface Access Filtering</b>	Web, Telnet / SSH, CLI, RS-232 console

**Management Features**

<b>CLI</b>	Cisco® like CLI
<b>Web UI</b>	Supported
<b>Telnet</b>	Server
<b>SNMP</b>	V1, V2c, V3
<b>sFlow</b>	Supported
<b>Modbus/TCP</b>	Supports for management and monitoring
<b>SW &amp; Configuration Upgrade</b>	TFTP, HTTP
	Redundant firmware in case of upgrade failure
<b>SFTP &amp; FTP client</b>	Supports for upload/download configuration
<b>RMON</b>	RMON I (1, 2, 3, 9 group), RMON II
<b>MIB II</b>	RFC 1213
<b>UPnP</b>	Supported
<b>BOOTP</b>	Supported
<b>DHCP</b>	Server, Client, Relay, Relay option 82, Snooping
<b>RARP</b>	Supported
<b>IP Source Guard</b>	Supported
<b>Port Mirroring</b>	Supported
<b>Event Syslog</b>	Syslog server (RFC3164) (Support 4 server), store in non-volatile Flash ROM, 10240 recore
<b>Warning Message</b>	System syslog, e-mail, alarm relay
<b>DNS</b>	Client, Proxy
<b>NTP, SNTP</b>	Client
<b>LLDP (IEEE 802.1ab)</b>	Link Layer Discovery Protocol
	LLDP-MED

**IPv6 Features**

<b>IPv6 Management</b>	Telnet Server/ICMP v6
<b>SNMP over IPv6</b>	Supported
<b>HTTP over IPv6</b>	Supported
<b>SSH over IPv6</b>	Supported
<b>IPv6 Telnet</b>	Supported
<b>IPv6 NTP, SNTP</b>	Client
<b>IPv6 TFTP</b>	Supported
<b>IPv6 QoS</b>	Supported




**IPv6 ACL** Number of rules: up to 256 entries  
for L2 / L3 / L4  
L2: Mac address SA/DA/VLAN  
L3: IP address SIP, Subnet (32bit)  
L4: TCP/UDP

## Others Features

<b>Advanced PoE Management</b>	PoE PD Failure Auto Checking, and Auto reset when PD fail
	PoE Scheduling (On/Off schedule weekly)
	PoE Configuration
	PoE Enable/Disable
	Power limit by classification
	Power limit by management
	Power feeding priority
Total PoE Power budge limitation (maximum 80W)	

## Dimensions

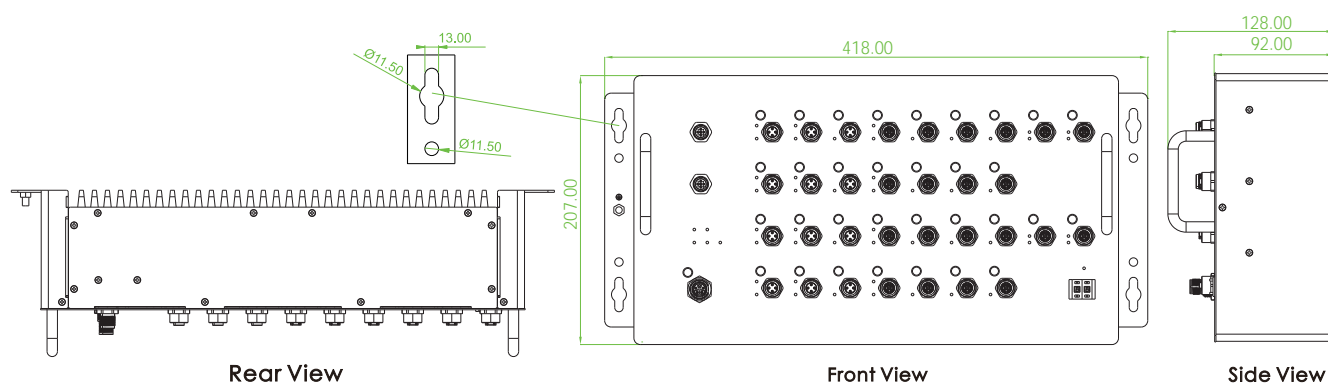

## Ordering Information

Model Name	Managed	Total Port	FE	GbE	10G		PoE	
			D-code M12	X-code M12 UTP	X-code M12 UTP	10G X-code M12 Bypass	IEEE802.3 af/at	PoE Total Power Budget
ITP-12164XTM-12PH	V	32	12	16	4	4	12	80W

Redundant Dual Input Power	Certification					
24/48/72/96/110VDC (16.8~137.5VDC)	EN45545-2	EN50155	EN50121-4	EN61000-6-2 EN61000-6-4	CE, FCC	IEC61373
V	V	V	V	V	V	V