

FRM220-10/100iS-2

In-Band Managed FE Media Converter

Dual Channel 10/100Base-TX to 100Base-FX In-Band Managed Converter



The FRM220-10/100iS-2 is a dual (2 in 1) 10/100Base Ethernet to 100Base-FX fiber slide-in card converter based on the popular FRM220-10/100i. With advanced features like bandwidth control, this dual media converter is targeted for central equipment in metro LAN, campus, enterprise and FTTx applications. By offering in-band management, this converter can be completely controlled and monitored in a centrally located managed rack. By offering two completely isolated converters on one card, this card can effectively double the conversion capacity of a rack.

Features


- Dual independent converters 10/100Base-TX to 100Base-FX
- Auto-Negotiation or forced mode
- Auto MDI/MDIX
- Forward 2046 bytes (max.) packets in switch mode
- Supports IEEE 802.1Q Tag VLAN pass thru
- Supports Q in Q double tagged frame transparent
- Forward 9K jumbo packets in converter mode
- Supports local / remote In-band management (Monitor and Configure) by the SNMP manager (NMC)
- Bandwidth control (Nx32Kbps or Nx512Kbps) & flow control (Pause)
- Supports remote CPE power fail detect (dying gasp)
- Supports Far End Fault Indication (FEFI) and Link Fault Pass-Through (LFPT)
- Supports Loop Back Test and RMON counter
- D/D function for supported SFP fiber transceiver
- Auto Laser Shutdown (ALS) and Fiber Hardware Reset (FHR)
- Online local / remote f/w upgrade

Specifications


Optical Interface	Connector	SFP LC x 2
	Data rate	125Mbps
	Duplex mode	Full duplex
	Fiber	MM 50/125μm, 62.5/125μm SM 9/125μm
	Distance	MM 2km, SM 15/30/50/80/120km WDM 20/40/60/80km
	Wavelength	MM 1310nm, SM 1310,1550nm WDM 1310Tx/1550Rx (type A) 1550Tx/1310Rx (type B)
Electrical Interface	Connector	RJ-45 x 2
	Data rate	10Mbps, 100Mbps
	Duplex mode	Half / Full duplex
	Cable	10Base-T Cat.3, 4, 5, UTP 100Base-TX Cat.5, 5e or higher
Standards	IEEE 802.3, IEEE 802.3u, IEEE 802.3x	
Indications	LED (Power, FEF, FX-Link, TX-SPD, TX-Duplex, TX-Link)	
Power Input	12VDC	
Power Consumption	< 4W	
Dimensions	159.5 × 20.8 × 88mm (D×W×H)	
Weight	130g	
Temperature	0 ~ 50°C (Operating), -10 ~ 70°C (Storage)	

Humidity	10 ~ 90% non-condensing
Certification	CE, FCC, RoHS compliant
MTBF	65,000 hrs

Application

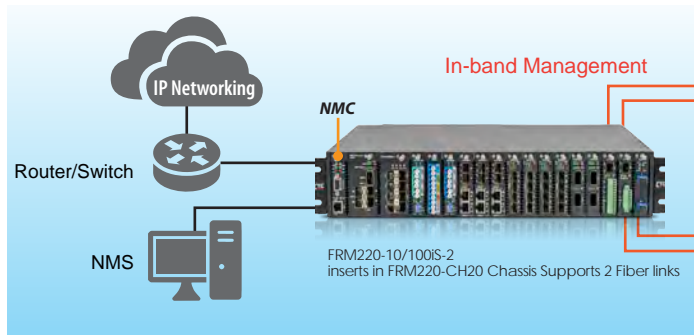

Central Office (CO)

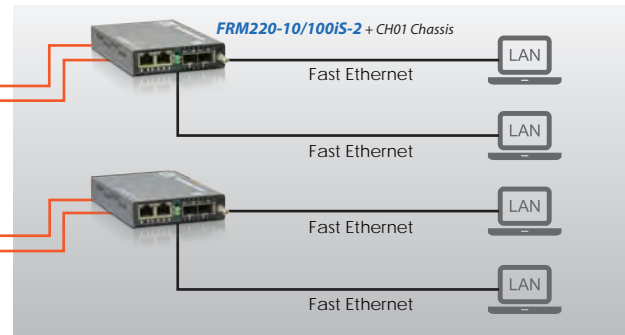

Customer Premise Equipment (CPE)

Ordering Information

Model Name	Description
FRM220-10/100iS-2	Dual converter 10/100Base-TX to 100Base-FX SFP converter card with In-band management, (optional SFP)