

ITP-1204GTM

12x FE M12 + 4x GbE M12

EN50155 Managed Switch

- » EN50155, EN50121-4, EN45545-2, EN61000-6-2, EN61000-6-4 CE, FCC Certified
- » 24/48/72/96/110VDC Redundant Dual Power Input
- » 4KV Surge Protection for UTP Ports
- » 2.25K VDC Hi-Pot Isolation Protection for Ethernet Ports and Power
- » Cable Diagnostics, Identifies Opens/Shorts Distance



The ITP series models are managed, industrial grade, L2 Fast Ethernet switches that provide 12x 10/100Base-TX and 4x 10/100/1000Base-T(X) ports. The ITP switches use M12 connectors to ensure tight, robust connections and guarantee reliable connections against vibration and shock. These models are also compliant with EN50155, covering power input voltage, surge, EFT, ESD, vibration and shock, making these switches suitable for industrial applications, such as vehicle, rolling stock, or vessel. With a wide power input range of 24/48/72/96/110VDC (operating range 20 to 137.5VDC), this product series is especially suitable for rolling stock and track side installations.

Features

- M12 and M23 fiber connector against vibration and shock, M12 X-code for Gigabit port
- STP, RSTP, MSTP, ITU-T G.8031 ERP, ITU-T G.8032 Ethernet Protection Ring (ERPS) for redundant cabling
- Provides up to 5 instances that each supports μ-Ring, μ-Chain or Sub-Ring type for flexible uses.
(Please see CTC Union's μ-Ring white paper for more details)
- μ-Ring for Redundant Cabling, recovery time<10ms in 250 maximum devices
- Supports TTDP for train application
- Supports IEEE 1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- Supports EMS Management

Specifications

Standard		
IEEE 802.3		10Base-T 10Mbit/s Ethernet
IEEE 802.3u		100Base-TX, 100Base-FX, Fast Ethernet
IEEE 802.3ab		1000Base-T Gbit/s Ethernet over twisted pair
IEEE 802.1d		STP (Spanning Tree Protocol)
IEEE 802.1w		RSTP (Rapid Spanning Tree Protocol)
IEEE 802.1s		MSTP (Multiple Spanning Tree Protocol)
ITU-T G.8032 / Y.1344		ERPS (Ethernet Ring Protection Switching)
ITU-T G.8031 / Y.1342		EPS (Ethernet Protection Switching)
IEEE 802.1Q		Virtual LANs (VLAN)
IEEE 802.1X		Port based and MAC based Network Access Control, Authentication
IEEE 802.3ac		Max frame size extended to 1522Bytes
IEEE 802.3ad		Link aggregation for parallel links with LACP (Link Aggregation Control Protocol)
IEEE 802.1AX		Link aggregation for parallel links with LACP (Link Aggregation Control Protocol)
IEEE 802.3x		Flow control for Full Duplex
IEEE 802.3ac		Max frame size extended to 1522Bytes
IEEE 802.1ad		Stacked VLANs, Q-in-Q

Standard	IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization									
	IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)									
	IEEE 802.3az	EEE (Energy Efficient Ethernet)									
VLAN ID	4094 IEEE802.1Q VLAN ID										
Switch Architecture	10.4 Gbps (Full wire-speed)										
Data Processing	Store and Forward										
Flow Control	IEEE 802.3x for full duplex mode Back pressure for half duplex mode										
Network Connector	12x M12 (4-Pin, Female,D-Code) 10/100Base-TX UTP + 4x M12 (8-Pin, Female, X-Code) 10/100/1000Base-T UTP										
	UTP port provides Auto negotiation speed, Auto MDI/ MDI-X, Full/Half duplex function										
	Build-in 2x bypass GbE UTP ports (For -BP model optional)										
Console	RS-232 (5-pin A-Code M12 male)										
Network Cable	UTP/STP Cat. 5e cable or above										
	EIA/TIA-568 100-ohm (100meter)										
Protocols	CSMA/CD										
Reverse Polarity Protection	Supported										
Overload Current Protection	Supported										
CPU Watch Dog	Supported										
LED	System: Power 1 (Green), Power 2 (Green), Fault (Amber), CPU Act (Green), Ring Master (Amber)										
	UTP: 10/100 Link/Active (Green), 1000 Link/Active (Amber)										
Jumbo Frame	9.6KB										
MAC Address Table	8K										
Memory Buffer	512K Bytes for packet buffer										
Device Memory	16M Bytes Flash ROM, 128M Bytes RAM										
Power Supply	Provides 1x M23 (5-Pin, male) for redundant dual DC 24/48/72/96/110VDC (16.8~137.5VDC) wide input power										
Power Consumption	<table><tr><th>Input Voltage</th><th>Device Power Consumption</th></tr><tr><td>24VDC</td><td>13W</td></tr><tr><td>48VDC</td><td>14W</td></tr><tr><td>110VDC</td><td>16.5W</td></tr></table>			Input Voltage	Device Power Consumption	24VDC	13W	48VDC	14W	110VDC	16.5W
	Input Voltage	Device Power Consumption									
	24VDC	13W									
	48VDC	14W									
110VDC	16.5W										
Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay										
Alarm Relay Contact	5-pin A-code M12 male, Relay outputs with current carrying capacity of 1A @24VDC										
Operating Temperature	-40 ~ 75°C										
Operating Humidity	5% to 95% (Non-condensing)										
Storage Temperature	-40 ~ 85°C										
Housing	Rugged Metal, Fanless and IP54 grade housing protection										
Dimensions	113 x 260 x 132mm (D x W x H)										
Weight	2.8kg										
Installation Mounting	Wall mounting										
MTBF	290,905 Hours (MIL-HDBK-217)										
Certification											
EMC	CE (EN55024, EN55032)										
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE										
Railway Traffic	EN50155, EN50121-4										
Fire protection of railway vehicles	EN 45545-2										
Immunity for Heavy Industrial Environment	EN61000-6-2										
Emission for Heavy Industrial Environment	EN61000-6-4										

EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B
	EN61000-4-3 (RS) Level 3, Criteria A
	EN61000-4-4 (Burst) Level 3, Criteria A
	EN61000-4-5 (Surge) Level 3, Criteria B
	EN61000-4-6 (CS) Level 3, Criteria A
	EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
Hi Pot Protection	DC 2.25KV for power to chassis ground, Ethernet port to chassis ground
4KV Surge Protection	Supported for UTP port
Shock	IEC-61373
Freefall	IEC 60068-2-32
Vibration	IEC-61373

Software Specifications

Topology

VLAN	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN ID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN (Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries Private VLAN for port isolation GVRP (GARP VLAN Registration Protocol) MVR (Multicast VLAN Registration) Voice VLAN
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group Dynamic (IEEE 802.3ad LACP), up to 5 trunk group Support IEEE802.1AX passive and active mode
Spanning Tree	IEEE802.1d STP, IEEE802.1w RSTP, IEEE802.1s MSTP
Multiple μ-Ring	Up to 5 instances that each supports μ -Ring, μ -Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings. Recovery time <10ms The maximum number of device is allowed 250 nodes in a Ring.
Loop Protection	Supported
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Recovery time <10ms Single Ring, Sub-Ring, Multiple ring topology network
ITU-T G.8031 / Y.1342 EPS (Ethernet Protection Switching)	Supported

QoS Feature

Class of Service	IEEE802.1p 8 active priorities queues per port
Traffic Classification QoS	IEEE802.1p based CoS IP Precedence based CoS IP DSCP based CoS QCL (QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI, Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
Bandwidth Control for Ingress	100~1,000,000 when the "Unit" is "kbps", and 1~1,000 when the "Unit" is "Mbps"
Bandwidth Control for Egress	100~1,000,000 when the "Unit" is "kbps", and 1~1,000 when the "Unit" is "Mbps" Rate Unit : bit Per queue / Port shaper
DiffServ (RF 2474) Remarking	
Storm Control	For Unicast, Broadcast and Multicast

IP Multicasting Feature

IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile, Throttling Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port
----------------------------	--

Security Features**IEEE 802.1X** Port-Based, MAC-Based**ACL** Number of rules : up to 256 entries
for L2 / L3 / L4
L2: Mac address SA/DA/VLAN
L3: IP address SA/DA, Subnet
L4: TCP/UDP**RADIUS** Authentication & Accounting**TACACS+** Authentication**HTTPS, HTTP** Supported**SSL / SSH v2** Supported**User Name Password Authentication** Local Authentication

Remote Authentication (via RADIUS / TACACS+)

Management Interface Access Filtering Web, Telnet / SSH, CLI, RS-232 console**Management Features****CLI** Cisco® like CLI**Web UI** Supported**Telnet** Server**SNMP** V1, V2c, V3**sFlow** Supported**Modbus/TCP** Supports for management and monitoring**SW & Configuration Upgrade** TFTP, HTTP


Redundant firmware in case of upgrade failure

FTP client Supports for upload/download configuration**RMON** RMON I (1, 2, 3, 9 group), RMON II**MIB II** RFC 1213**UPnP** Supported**BOOTP** Supported**DHCP** Server, Client, Relay, Relay option 82, Snooping**RARP** Supported**TTDP** Supported (Train Topology Discovery Protocol)**IP Source Guard** Supported**Port Mirroring** Supported**Event Syslog** Syslog server (RFC3164)**Warning Message** System syslog, e-mail, alarm relay**DNS** Client, Proxy**IEEE1588 PTP V2** Supports 5 operating mode in each port :
Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master and Slave**NTP, SNTP** Client**LLDP (IEEE 802.1ab)** Link Layer Discovery Protocol
LLDP-MED**IPv6 Features****IPv6 Management** Telnet Server/ICMP v6**SNMP over IPv6** Supported**HTTP over IPv6** Supported**SSH over IPv6** Supported**IPv6 Telnet** Supported**IPv6 NTP, SNTP** Client**IPv6 TFTP** Supported**IPv6 QoS** Supported**IPv6 ACL** Number of rules: up to 256 entries
for L2 / L3 / L4
L2: Mac address SA/DA/VLAN
L3: IP address SIP, Subnet (32bit)
L4: TCP/UDP

Others Features

Green Ethernet	Supports IEEE802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption
	Determine the cable length and lowering the power for ports with short cables
	Lower the power for a port when there is no link
	LED Power Management: Adjustment LEDs intensity
Cable Diagnostic	Measuring UTP cable OK or broken point distance

Dimensions

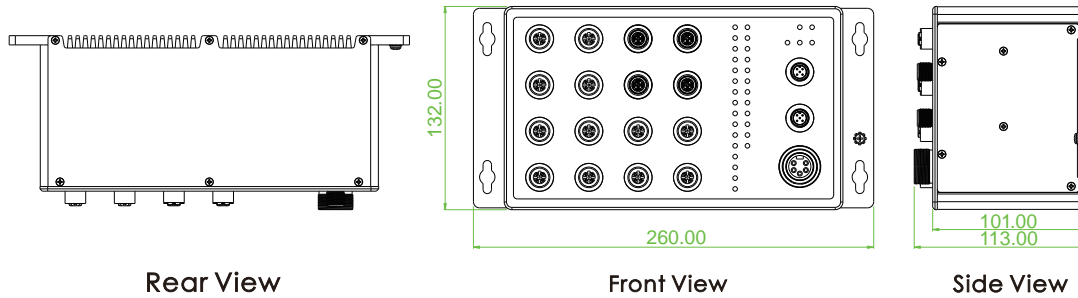

Rear View

Front View

Side View

Ordering Information

Model Name	Managed	Protection	Total Port	FE	GbE	
				D-code M12	GbE X-code M12 UTP	GbE X-code M12 UTP Bypass
ITP-1204GTM-E-BP	V	IP54	16	12	2	2

Redundant Dual Input Power	Certification				
24/48/72/96/110VDC (16.8~137.5VDC)	EN45545-2	EN50155 EN50121-4	EN61000-6-2 EN61000-6-4	CE, FCC	IEC61373
V	V	V	V	V	V

Optional Accessories

■ Optional Cable/Connector

P/N: CAB-M12XM8-RJ45

M12 X-code Male (8-Pin) to RJ-45,
AWG 24 ,IP67, 1 meter



For GbE UTP (X-code)

P/N: CAB-M12DM4-RJ45

M12 D-code Male (4-Pin) to RJ-45,
AWG 24 ,IP67, 1 meter



For FE UTP

P/N: CAB-M12AF5-OPEN

M12 A-code Female (5-Pin) to open
wire , AWG 22 , IP67, 1 meter



For Alarm

P/N: CAB-M23F5-OPEN

M23 Female (5-Pin) to open wire,
(AWG 16) , IP67, 1 meter



P/N: M12D-M4

M12 D-code Male (4-Pin)
connector, IP67



P/N: M12A-F5

M12 A-code Female (5-Pin)
connector, IP67

