

IGS-600-4PH24

Industrial Unmanaged GbE PoE Switch

6x GbE RJ45 with 4x PoE 120W, 24/48VDC

- » *UL60950-1, EN50121-4, EN61000-6-2, EN61000-6-4, CE, FCC Certified*
- » *24/48VDC (20~57VDC) Redundant Dual Power input with built-in Very High Efficiency Booster*
- » *Regulate PoE Output Voltage (52VDC) to Stabilize PoE Device, and Guarantee Delivery PoE Power Distance to 100meter*
- » *Provides a DIP-Switch to Set Functions*



The model is 6 port unmanaged industrial grade Gigabit PoE switch with 4x 10/100/1000Base-T PoE ports that provide stable and reliable Ethernet transmission. Housed in rugged DIN rail or wall mountable enclosures, This switch is designed for harsh environments, such as industrial networking, security automation applications, IP Surveillance, intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications. Standard operating temperature range model (-10 to 60°C) and wide operating temperature range model (-40 to 75°C) fulfill the special needs of industrial automation applications.

Features


- Provides 4-port IEEE 802.3at/af PoE+ output, 30W/port
- Supports power failure alarm message by relay
- Supports flow control
- Jumbo frame supported
- IP30 rugged metal housing and fanless
- Wide operating temperature -40 ~ 75°C ("E" model)

Specifications

Standard	IEEE 802.3	10Base-T Ethernet
	IEEE 802.3u	100Base-TX Fast Ethernet
	IEEE 802.3ab	1000Base-T Gigabit Ethernet
	IEEE 802.3z	1000Base-X Gigabit Ethernet
	IEEE 802.3x	Flow Control and Back Pressure
	IEEE 802.3af	PoE (Power over Ethernet)
	IEEE 802.3at	PoE+ (Power over Ethernet enhancements)
Switch Architecture	Back-plane (Switching Fabric): 12Gbps (Full wire-speed)	
Data Processing	Store and Forward	
Flow Control	IEEE 802.3x flow control, back pressure flow control	
Provides Broadcast Storm Protection	Enable / Disable set by DIP SW	
Jumbo Frame	10K Bytes	
MAC Address Table	8K	
Packet Buffer Size	1Mbits	
PoE Standard & RJ-45 Pin Assignment	4x IEEE 802.3at/af PoE+ 2 pairs PoE, PoE+ Positive (V+) : RJ-45 pin 1, 2. Negative (V-) : RJ-45 pin 3, 6. Data (1,2,3,6,4,5,7,8)	
Network Connector	6 x RJ-45 10/100/1000Base-T auto negotiation speed, Auto MDI/MDI-X function, Full/Half duplex	

Network Cable	UTP/STP Cat. 5e cable or above EIA/TIA-568 100-ohm (100meter) Fiber Cable (Multi-mode): 50/125um, 62.5/125um Fiber Cable (Single-mode): 9/125um							
Protocols	CSMA/CD							
LED	Per unit: Power 1 (Green), Power 2 (Green), Fault (Amber) Fiber Per port: Link/Active (Green) Per Port PoE LED <ul style="list-style-type: none">• Active : ON• Inactive : OFF• Fault : Flash (Fault: Over Load, Short Circuit, Port failed at Startup)							
DIP SW	DIP 1 ON : Disable power failure alarm OFF : Enable power failure alarm DIP 2 ON : Disables broadcast storm protection OFF : Enable broadcast storm protection							
Reverse Polarity Protection	Supported							
Overload Current Protection	Supported							
Power Supply	Redundant Dual DC 24/48V (20~57VDC) input power (Removable Terminal Block) Built-in very high efficiency booster(94~97%) to rise up 52VDC for PoE output Regulated PoE output voltage (52VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100meter							
Power Consumption	<table><tr><th>Input Voltage</th><th>IGS-600-4PH24</th></tr><tr><td>24VDC</td><td>142.9W</td></tr><tr><td>48VDC</td><td>139.6W</td></tr></table>		Input Voltage	IGS-600-4PH24	24VDC	142.9W	48VDC	139.6W
Input Voltage	IGS-600-4PH24							
24VDC	142.9W							
48VDC	139.6W							
PoE Power Budget	Maximum PoE Output power budget 120W, 30W/port							
Alarm Relay Contact	Relay outputs with current carrying capacity of 1A @24VDC							
Removable Terminal Block	Provides 2 Redundant power, Alarm relay contact, 6Pin							
Operating Temperature	-10 ~ 60°C (IGS-600-4PH24) -40 ~ 75°C (IGS-600-4PHE24)							
Operating Humidity	5% to 95% (Non-condensing)							
Dimensions	106 x 62.5 x 134.8mm (D x W x H)							
Housing	Rugged Metal, IP30 Protection, Fanless							
Weight	0.84kg							
Installation Mounting	DIN Rail mounting or wall mounting (Optional accessories)							
MTBF	649,579 Hours @25°C (MIL-HDBK-217)							
Certification								
EMC	CE							
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE EN55022 Class A							
Railway Traffic	EN50121-4							
Immunity for Heavy Industrial Environment	EN61000-6-2							
Emission for Heavy Industrial Environment	EN61000-6-4							
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A							
Safety	UL60950-1							
Shock	IEC 60068-2-27							
Freefall	IEC 60068-2-32							
Vibration	IEC 60068-2-6							

Dimensions

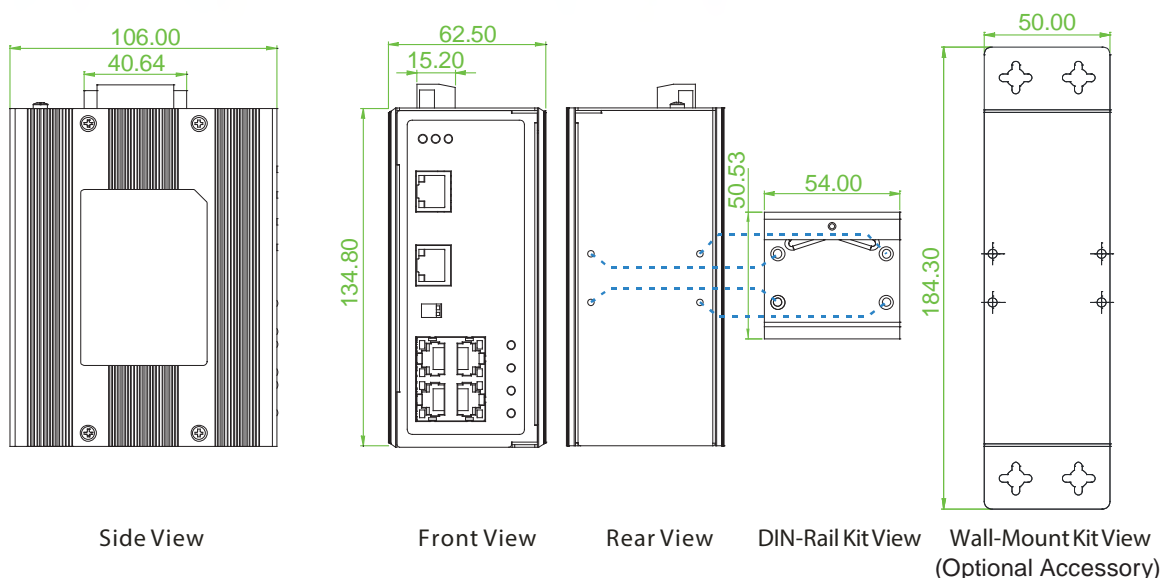

Ordering Information

Model Name	Total Port	RJ45	PoE		Input Power	Certification				Operating Temperature
		10/100/1000 Base-T(X)	IEEE 802.3at	Power Budget	Redundant	Railway EN50121-4	Safety UL60950-1	EN61000-6-2	CE FCC	
IGS-600-4PH24	6	6	4	120W	24/48VDC	V	V	V	V	-10~60°C
IGS-600-4PHE24	6	6	4	120W	24/48VDC	V	V	V	V	-40~75°C

Optional Accessories

■ Wall Mount Kit

IND-WMK02 Wall Mount kit for Industrial product (Wide) (184*50mm)

■ Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with all CTC Union industrial grade Ethernet switches for guaranteed compatibility and performance. Best performance can be guaranteed, even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheets for more items and detailed information.)

ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDML, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDML, -10~70°C (-40~85°C)
ISFP-T7T00-00-(E)	Industrial SFP 10/100/1000Base-T UTP 100meter, -10~70°C (-40~85°C)
ISFP-M5002-31-D(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDML, -10~70°C (-40~85°C)
ISFP-S5030-31-D(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDML, -10~70°C (-40~85°C)

■ Industrial Power Supply

NDR-120-48	Industrial Power, Input 90 ~ 264VAC/127 ~ 370VDC, Output 48VDC, 120W, -20 ~ 70°C
NDR-240-48	Industrial Power, Input 90 ~ 264VAC/127 ~ 370VDC, Output 48VDC, 240W, -20 ~ 70°C (For more ref.)
NDR-480-48	Industrial Power, Input 90 ~ 264VAC/127 ~ 370VDC, Output 48VDC, 480W, -20 ~ 70°C (For more ref.)