



# M120N

## Advanced Industrial/In-Vehicle LTE Router

### M120N - Advanced Industrial/In-Vehicle LTE Router

#### Overview

The M120N Advanced Industrial/In-Vehicle LTE Router is a high performance all-in-one fixed/mobile wireless communications platform with advanced software enabling high availability, reliable and secure connectivity for mission critical applications. The compact rugged design integrates dual SIMs, four-port Gigabit Switch, Wi-Fi Access Point, embedded multi-GNSS receiver for GPS or GLONASS, and ignition sensing for in-vehicle applications. The M120N is specifically designed to support a wide range of applications in Smart Bus and M2M segments.

#### High Availability and Network Resilience

The M120N is a feature-rich industrial-grade router coupled with robust network processing and Multi-WAN connectivity, purpose built for network reliability and business continuity. In the event of a connectivity failure of the primary WAN interface, traffic is automatically redirected to the secondary WAN interface, it will perform failback when the primary interface connection is restored. The M120N also supports dual SIMs for a redundancy between carriers networks. The M120N features four Gigabit Ethernet ports, a Serial port (RS-232/RS-485) and 802.11n AP to enable LTE data connectivity.

#### Designed for Industrial Environments

The M120N supports an extended operating temperature range and a flexible power input voltage range of 10-56V DC making it suitable for diverse environments and applications. To enable simple, reliable, and efficient integration, the ultra-compact and lightweight design incorporates highly flexible mounting options to ensure that the device can be easily mounted anywhere.

#### 24/7 Cloud Management and Network Visibility

Remote monitoring, management and control of devices in real-time is essential for IoT networking devices, M2M and critical applications. BECentral®, BEC's Cloud Based Remote Management, is a comprehensive device management platform designed to minimize deployment, lower support expenses and maximize the operational efficiency and profitability of the operator. BECentral® provides access to critical information for LTE Network diagnostics and troubleshooting, such as: signal quality measurements, network status/APN, location ID and Cell ID. Additional functionality includes OTA firmware upgrades (individual or batch), local network configuration settings on the M120N.

#### High performance & reliability and easy to manage and access

- Offer 4G/LTE broadband connectivity (3G fallback is optional)
- Multi-WAN interfaces: Dual SIMs and GbE WAN for network resilience and reliable connectivity
- Network expandability - load balancing and reliable connectivity - auto-failover/failback
- Embedded GNSS option for real-time asset tracking and location data-based applications\*4
- Local and Remote management via Web GUI, SNMP or CWMP (TR-069)

#### Serial Port (DB-9 female)

- RS-232/ RS-485
- Support Modbus/ TCP, Telnet Server, SSH Server, UDP Server/ Client, TCP Server/ Client

#### Compact and unobtrusive design

- Small form factor with optional mounting kits, easily installed by a single person
- Ignition power control option when mounted within vehicles

#### Secure VPN Connections

- Embedded IPSec, PPTP, L2TP, GRE and OpenVPN secure VPN connection with powerful encryption

#### Designed for challenging / rugged deployments


- Hardened enclosure with Industrial-graded components
- Designed to withstand heat, humidity and protect from shock, vibration, etc.

#### Ideal Solution for

- Business Continuity, Logistics/Transportation and Fleet, Public Safety/ FirstNet applications.



## Application Diagram

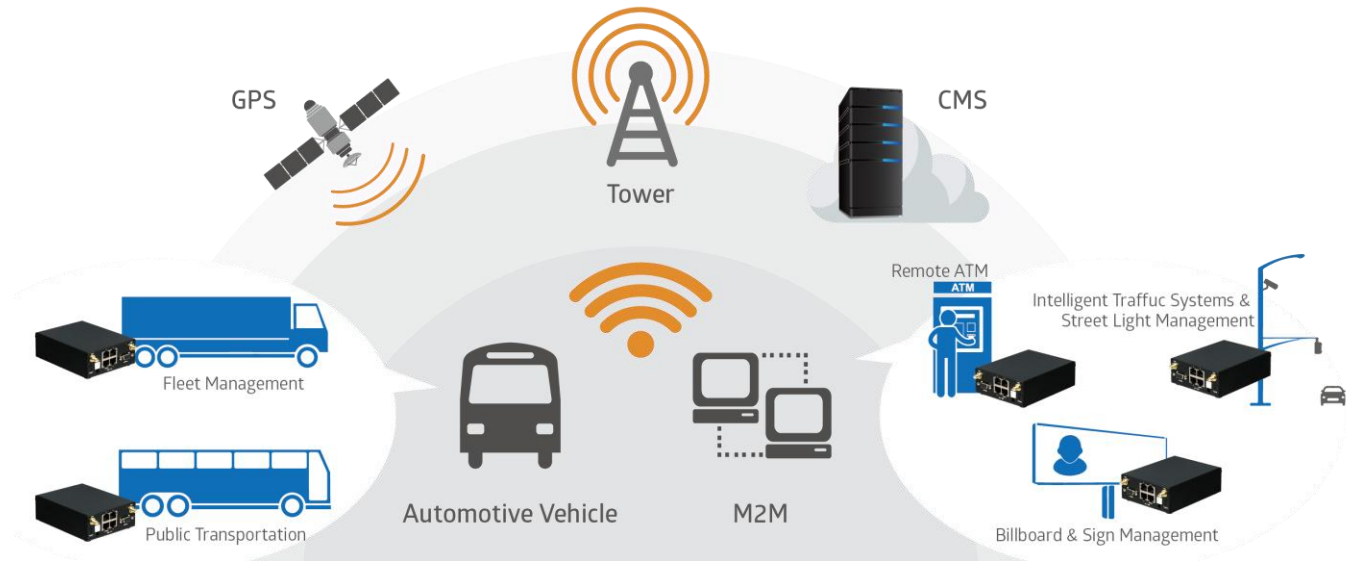

## Features & Specifications

### ■Availability and Resilience

- Dual SIMs (Dual SIM Single Standby)
- Dual-WAN Interfaces (LTE, GbE WAN)

### ■Embedded 4G LTE<sup>\*1</sup>

- Embedded high performance 4G LTE module
- Supported frequency bands:  
LTE-FDD: B1, B3, B5, B7, B8, B20, B28  
LTE-TDD: B38, B40, B41  
WCDMA: B1, B3, B5, B8
- Supported data rate:  
LTE-FDD: Max 300Mbps/ 50Mbps (DL/UL)  
LTE-TDD: Max 226Mbps/ 28Mbps (UL/UL)  
WCDMA: Max. 384 kbps/ 384 kbps (DL/UL)
- LTE Downlink MIMO support

### ■Network Protocols and Features

- Dual WAN Failover/ Failback
- Dual WAN Load Balancing
- IPv4, IPv6, IPv4/IPv6 dual stack<sup>\*2</sup>
- Dual APN<sup>\*2</sup>
- Keep Alive
- IP Pass-Through
- NAT, Virtual Server and DMZ
- Static Routing, Dynamic Routing (RIP v1/v2, OSPF, BGP)
- SNTP, DNS relay and DDNS
- Universal Plug and Play (UPnP) compliant
- Supports DHCP server/client/relay

### ■Firewall

- Built-in NAT Firewall
- Stateful Packet Inspection (SPI)
- Prevents DoS attacks including Land Attack, Ping of Death, etc.
- Access Control
- IP Filtering, MAC Filtering, URL Filtering
- VPN Pass-through

### ■Wireless LAN

- Compliant with IEEE 802.11n standard
- Up to 300Mbps wireless operation rate
- WPS (Wi-Fi Protected Setup) for easy setup
- 64/128 bits WEP supported for encryption
- Wireless security with WPA, WPA2, WPA/WAP2
- AP and WDS Operational Modes
- Multiple SSID (4 SSIDs), BSSID
- Wireless MAC Filtering
- Wireless Client Isolation
- Wi-Fi Hotspot with Captive Portal
- Support RADIUS authentication
- Wireless Client rate-limiting

### ■Serial Port (RS-232/ RS-485)

- DB-9 female
- RS-232/ RS-485
- Modbus/TCP, Telnet Server, SSH Server, UDP Server/ Client, TCP Server/ Client

### ■Global Navigation Satellite System(GNSS)<sup>\*3</sup>

- Embedded multi-GNSS engine for GPS or GLONASS system

### ■Virtual Private Network (VPN)

- IPSec
- PPTP
- L2TP
- GRE
- OpenVPN

### ■Management

- Password protection for system management
- Web-based GUI for remote and local management
- Firmware upgrade and configuration data upload and download via web-based GUI
- CWMP(TR-069)<sup>\*2</sup>, SNMP
- 4G/LTE or 3G Usage Allowance
- Remote System Log monitoring
- Scheduling Auto-Reboot
- Physical layer/protocol diagnostic test tool
- BECentral® Cloud-Based Remote Management

### ■Hardware Specifications

#### Physical Interface

- WAN: 4G LTE (and/or GbE WAN)
- Ethernet LAN: four(4) port 10/100/1000Mbps auto-crossover (MDI/ MDI-X) switch
- Serial Port(DB-9 female): one(1) port
- SIM Card: two(2) slots
- Reset Button
- Power Connector: 4-pin connector with ignition sensing
- LED Indicators
- Antenna:  
• 4G LTE: two(2) detachable antennas  
• GPS: one(1) detachable active antenna (option)  
• Wireless: two(2) detachable antennas

#### Power Specifications

- Input: DC 10V~56V

#### Physical Specifications

- Dimensions: 125.2 x 98.2 x 40.4 mm

#### Operating Requirements

- Operating: -40°C to 70°C
- Humidity: 20 ~ 95% non-condensing

#### Certifications

- CE
- FCC part 15B
- FCC part 18
- EN61000-6-2
- EN61000-6-4

#### Notes:

1. The 4G LTE is dependent on your local service provider.
2. Only upon request for Telco/ ISP tender projects.
3. The support for GPS and/or GLONASS functions depends on the equipped module's capabilities.
4. Specifications in this datasheet are subject to change without prior notice.