

XMC-10GCM

10G In-Band Managed Media Converter

100M/1G/10GBase-T + 2 × 10GBase-R SFP+ In-**Band Managed Standalone Converter**



This media converter supports duplex and speed configuration, jumbo frames allocation of 10G Gigabit interfaces. By offering additional function, this 10G converter also provides 1-port 100M/1G/2.5G/10GBase-T RJ45 port allowing 100M/1G/2.5G/10G based devices to connect to 10G Ethernet fiber backbone.



- 2-port 1G/2,5G/5G/10G Base-R SFP+ with 1-port 100M/1G/2.5G/5G/10GBase-T RJ45
- Supports local / remote In-band management
- Standalone IP Based, Web GUI, Telnet, SNMP management
- Auto-Negotiation / Auto MDI/MDIX
- Forward 10K bytes Jumbo packets (max.)
- Supports Flow control (Pause)
- Supports BERT / loopback test

- Supports Far End Fault Indication (FEFI)
- Supports Link Fault Pass-Through (LFPT)
- D/D function for supported SFP fiber transceiver
- Auto Laser Shutdown (ALS)
- Online local / remote f/w upgrade
- Fiber Redundant mode
- Supports DWDM Tunable SFP+

Specifications Interface 1-port 100M/1G/2.5/5G/10Gbps RJ45 + 2-port 10G/5G/2.5G/1Gbps SFP+ with USB console port Filter & Forward Rate 14880pps at 10Mbps, 148800pps at 100Mbps, 1488000pps at 1Gbps, 14880000pps at 10Gbps **Transmission Method** Store and Forward IEEE 802.3 IEEE 802.3u, IEEE 802.3x, IEEE 802.3z, IEEE 802.3ab, IEEE 802.3ae, IEEE 802.1D Standard IEEE 802.1w, IEEE 802.1s Packet Buffer 2M bits MAC Table Size 16K Max. Packet Size 10K Bytes Management Web/Telnet /SNMP, HTTP, IPv6/IPv4 management SNMP Agent SNMP v1/v2c Software Upgrade HTTP, console LED Display Power, System, Link, Speed/Act, Test Power Input 12VDC Power Consumption < 10W**Operating Temperature** $0 \sim 45^{\circ}C$ Storage Temperature -10 ~ 70°C **Humidity** 5% ~ 90% (non-condensing) Dimensions $139 \times 23.2 \times 88$ mm (D×W×H) Regulatory FCC, CE

TEL: (02)2999-0857

FAX: (02)2999-0852


瑞虹科技股份有限公司 www.siprotech.com.tw

EMAIL: siprotech_sales@siprotech.com.tw ADD:新北市三重區光復路一段83巷1號3樓





Application

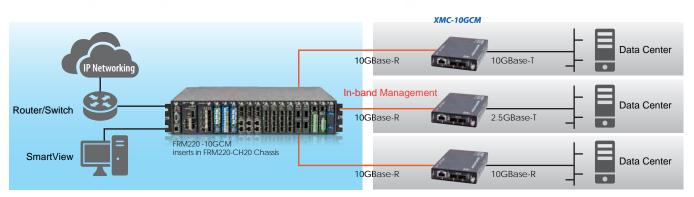

Central Office (CO)

Customer Premise Equipment (CPE)

Ordering Information \	
Model Name	Description
XMC-10GCM	1 × 100M/1G/2.5G/10G Base-T RJ45 + 2 × 10GBase-R SFP+ In-Band Managed Standalone Converter

瑞虹科技股份有限公司 www.siprotech.com.tw TEL: (02)2999-0857 FAX: (02)2999-0852 EMAIL: siprotech_sales@siprotech.com.tw ADD: 新北市三重區光復路一段83巷1號3樓