
P.O. Box 640
1800 Springhead Ch. Rd.
Willacoochee, Ga. 31650

www.landmsupplyco.com

912-534-6071
800-948-7870
912-534-6254(fax)

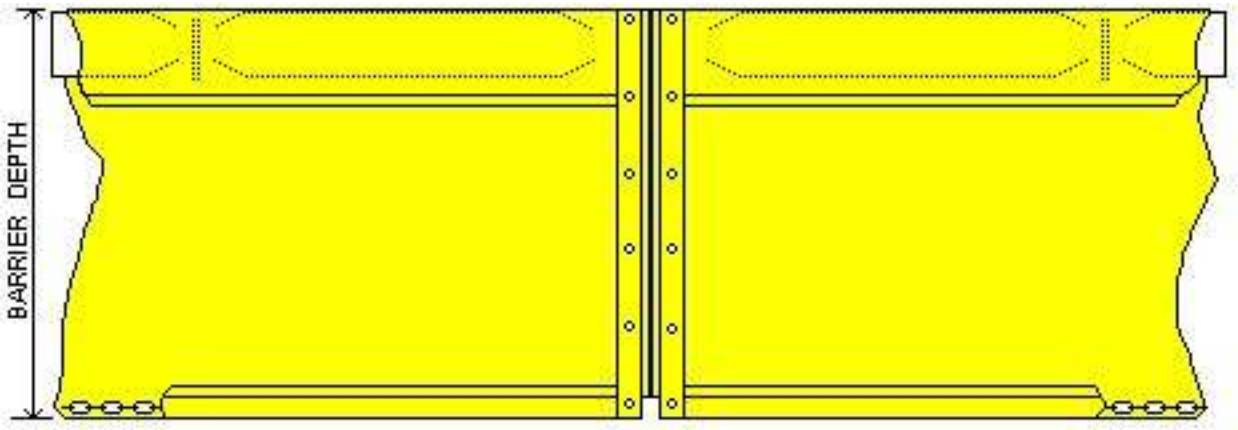

Tough Guy® Floating Turbidity Barrier
Type 1.DOT

Specifications (ST: 10/08)

Fabric - 18 oz. nominal laminated vinyl/polyester having the following characteristics:

Construction - vinyl laminate on 9X9 1000 x 1300 denier polyester scrim
Weight – 18.5 oz. per sq. yd. (434 gr./sq. m.)
Adhesion – 24 x 20 lb./2”
Grab Tensile – 410 x 410 lb./in. (430 x 421 daN/5cm.)
Tongue Tear – 100 x 100 lb. (95 x 95 daN)
Hydrostatic - 600 psi (4167 kPa)
Cold resistance to crack: -40° F/C

All seams heat sealed
5/8 inch diameter poly rope reinforced vertical edges
#4 brass grommets
1/4 in. galvanized chain ballast
EPS flotation, 6 in. x 6 in., 13.5 lb./ft. buoyancy in fresh water and 14.4 lb./ft buoyancy in saltwater.

8-11-14