

# OVX-6400

## 6400VA DC/AC INVERTER

### GENERAL FEATURES:

- Sine wave output voltage
- Suitable for motors control
- Adjustable output frequency
- Adjustable output voltage
- High input-output isolation 5200V<sub>RMS</sub>
- Remote off opto-coupled
- Alarm by isolated relay contacts
- Configurable input: Reverse or Mid power
- Remote control via RS-232 or CAN BUS
- Designed according to EN61287-1
- Input voltage according to:
  - EN50163:2006
  - EN50124-2:2017
- Fire and smoke: EN45545-2 pending
- Parallel operation up to 4 units (coming soon)



	Input voltage	Transient input overvoltage	Output voltage	Output power
<b>OVX-6400-7701</b>	400 ... 1000 V <sub>DC</sub>	None	400V three phase	6kW 6.4kVA 8kW <sub>PK</sub>
<b>OVX-6400-7701Z</b>	400 ... 1000 V <sub>DC</sub>	2800V acc. EN50163	400V three phase	6kW 6.4kVA 8kW <sub>PK</sub>

## INPUT

Nominal DC input voltage	600 / 750V
Minimum DC input voltage	400V continuous
Maximum DC input voltage	1000V continuous
Maximum Input overvoltage	Only for the model OVX-6400-7701Z: <ul style="list-style-type: none"> <li>EN50163:2006 (Supply voltage of traction systems)</li> <li>2800V according to EN50124-2=2017 4.2.2 and Annex A</li> </ul>
Maximum input ripple	±5% V <sub>PP</sub> from 300 to 360Hz
Inrush current	15A

## OUTPUT

Output type	AC 3ph with neutral
Output Voltage	400V line to line
Output Waveform	Sinusoidal
Voltage tolerance	±5%
Output voltage range	20...100% of V <sub>OUT</sub> (adjust via remote control)
Output frequency	50 / 60Hz via DIP-switch, 5...75Hz via RS-232
Maximum continuous current (I <sub>RMS</sub> )	9.24A
Maximum peak current 5s (I <sub>RMS</sub> )	11.5A
Continuous active / apparent power	6000W / 6400VA
Peak active / apparent power 5s	8000W / 8000VA
Load regulation	< 4.5%
Line regulation	< 2%
Output wave distortion THD	< 2% (average of 16 samples)
Output HF ripple	< 2.5%

## ENVIRONMENTAL

Storage temperature	-25 ... 80°C
Operating ambient temperature:	
Full load	-25 ... 55°C, 70°C 10 min (SU3 class, according to EN61287-1)
62.5% load	-25 ... 70°C
Relative humidity without condensation	5 ... 95%
Maximum Altitude	2000m at full load
Cooling	Internal forced air controlled
Shock and Vibrations according to	EN61373:2011 Category 1 class B body mounted
Environmental regulations	RoHS & Reach according to directive 2011/65/EU

## EMC

Immunity according	EN61000-6-2, EN50121-3-2
Emissions according	EN61000-6-4, EN50121-3-2

## SAFETY

Safety according to	EN50124-1 Railway app. (Insulation coordination)
Dielectric strength: Input-Output	5200V <sub>RMS</sub> 50Hz 1min.
Dielectric strength: Input-Earth	3400V <sub>RMS</sub> 50Hz 1min.
Dielectric strength: Output-Earth	2300V <sub>RMS</sub> 50Hz 1min.
Pollution degree	PD2
Overvoltage category	OV3
Fire and smoke	EN45545-2

## RELIABILITY

MTBF	100.000h @40°C according to SN29500
Life cycle	20 years (fan maintenance after 10 years is required)



## MECHANICAL

Dimensions (H x W x D mm)	87 x 430 x 450
Weight	< 12 kg
Protection degree	IP20


## PROTECTIONS

Against reverse input voltage	Series diode at the input
Against input under-voltage	Under-voltage lock-out
Against input over-voltage	Over-voltage lock-out
Against input over-current	Input fuse
Against output overloads and short-circuits	Current and I <sup>2</sup> T limited (see overload protection curve)
Against over-temperature	Shutdown with auto-recovery


## CONTROL

Output OK LED	Green
Input OK LED	Green
Alarm LED	Red
Input alarm	Open when alarm. Maximum rating: 0.16A at 160V <sub>DC</sub>
Output alarm	Open when alarm. Maximum rating: 0.16A at 160V <sub>DC</sub>
Remote OFF input	Off applying 15...143 V <sub>DC</sub> , Impedance >35k $\Omega$
Configurable input (reverse or mid-power)	ON: applying 15...143 V <sub>DC</sub> , Impedance >35k $\Omega$

## BLOCKS DIAGRAM

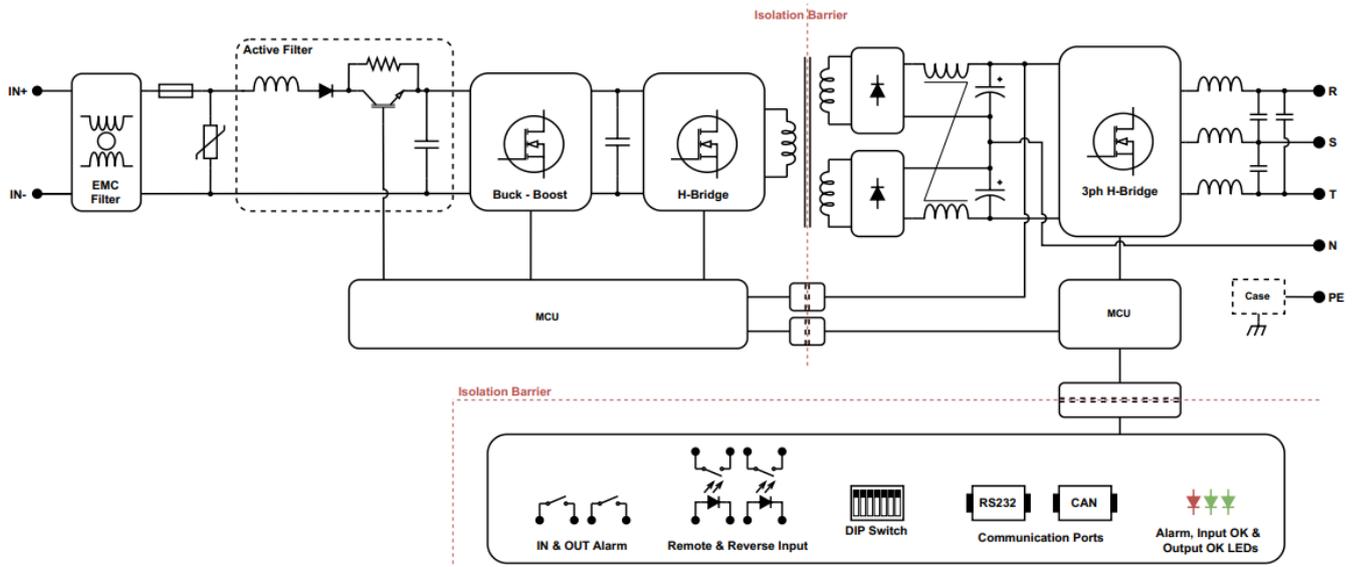

## CONNECTIONS

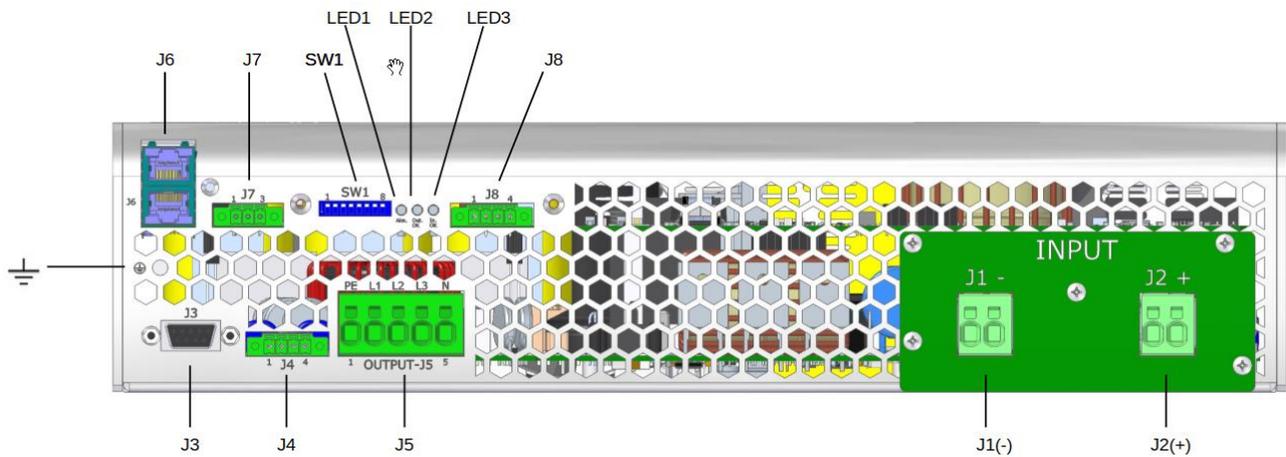

<b>J1</b>	-Vin	Spring clamp terminals cables 2.5 ... 6mm <sup>2</sup>
<b>J2</b>	+Vin	
<b>J5 - 1</b>	Protective Earth	Spring clamp terminals cables 2.5 ... 6mm <sup>2</sup>
<b>J5 - 2</b>	Output R	
<b>J5 - 3</b>	Output S	
<b>J5 - 4</b>	Output T	
<b>J5 - 5</b>	Output Neutral	
<b>J4 - 1</b>	+ Configurable input	Phoenix Contact MC1.5/4-GF-3.81 Recommended female: Phoenix Contact MC1.5/4-STF-3.81
<b>J4 - 2</b>	- Configurable input	
<b>J4 - 3</b>	+ Remote	
<b>J4 - 4</b>	- Remote	
<b>J8 - 1</b>	Status output	Phoenix Contact MC1.5/4-GF-3.81 Recommended female: Phoenix Contact MC1.5/4-STF-3.81
<b>J8 - 2</b>	Status output	
<b>J8 - 3</b>	Status input	
<b>J8 - 4</b>	Status input	
<b>J7 - 1</b>	CAN L (optional Can bus)	Phoenix Contact MC1.5/3-GF-3.81 Recommended female: Phoenix Contact MC1.5/3-STF-3.81
<b>J7 - 2</b>	CAN H (optional Can bus)	
<b>J7 - 3</b>	GND CAN	
<b>J3</b>	RS-232	Female D-Sub DB9
<b>J6A -J6B</b>	Optional Parallel operation	RJ45

## DESCRIPTION

The OVX-6400 is a three-phase sine-wave DC-AC inverter designed not only to work within 400 to 1000V input voltage range but also to withstand surges and over-voltages as described in EN50124-2.

The unit allows:

- Changing the output frequency by means of DIP-switch-7 of SW1. OFF: 50Hz or default programmed, ON: 60Hz.
- Change local/remote (waiting RS-232 commands) by means of DIP-switch-6 of SW1. OFF: local, ON: remote.
- Shutdown applying voltage output 15 to 143V on pins 3 and 4 of J4.
- Start-up motors by means of a soft start. In the start-up, the output voltage rises linearly from 0V to set voltage and the frequency from the initial to the set one. The start-up ramp slope may be changed via RS-232.
- Set the rotation speed of a motor according to the appropriate Voltage/Frequency ratio.
- Configurable input (pin 1 and 2 of J4):
  - Reverse mode: Changing the rotation direction for the next start-up of a motor by applying voltage between 15 and 143V.
  - Mid power mode: Changing the output frequency in V/F mode from nominal to a mid-power frequency by applying voltage between 15 and 143V.
- Monitoring the status of the input and output voltage through the contacts of two separate solid-state relays.
- Set and monitor parameters via RS-232, CAN BUS.
- Parallel operation. It will be possible to connect up to four units with active current sharing. This version is under design and will be available shortly.

The OVX-6400 is equipped with maximum average power protection as well as maximum output peak current protection. This protects the semiconductors even when an output short-circuit occurs. It also features a disabling function for input under-voltage, which allows protecting the batteries from harmful discharges.

## POWER DERATING vs AMBIENT TEMP.



## START-UP

- The unit has 6 threaded holes for the fixation on a mounting surface.
- The unit has internal fans. For an appropriate cooling, the air input and output should be free of elements that cause and an air flow reduction (minimum recommended distance to other objects 90mm).
- Make connections as shown in the figure.
- The default output frequency is 50Hz. For 60Hz simply actuate the dip-switch as indicated in the figure.

### For safety reasons, the following requirements must be met:

- Provide the equipment with some kind of protective enclosure that complies with the electrical safety directives in effect within the country where the equipment is installed.
- Include an input fuse with a rating immediately higher than the maximum input current.



## RS-232 communication port

It is possible to control and monitor the unit via RS-232 by means of a terminal emulator like "Tera Term" or "Putty". Also, it is possible to control and monitor the unit directly using the protocol shown in the table below. Use cable "Crossed over" or "Null Modem"


**Protocol configuration:** ASCII code, 57600 bauds, parity none, 8 bits, 1bit stop.

Header	Function	Parameter	Returns	Explanation	
P	L	V	PTV####.■	Input voltage in Volts	
		v	PTv####.■	Input voltage ripple in Volts	
		Y	PTYRN=#### [13]YSN=#### [13]YTN=####	Output voltage in Volts RMS Phase-Neutral ([13] = char 13 of ASCII code)	
		I	PTIR=####[13]IS=#### [13]IT=####	Output current in Amps RMS ([13] = char 13 of ASCII code)	
		T	PTT####.■	Internal temperature1 in K	
		t	PTt####.■	Internal temperature 2 in K	
		F	PTF####.■	Nominal output frequency in Hz	
		f	PTf####.■	Actual output frequency in Hz	
		y	PTy####.■	Actual output voltage set-point in V	
		S	PTS####.■	Inverter state 999.9 → Enabled 000.0 → Disabled 222.2 → Blocked by overload 111.1 → Blocked by overload or shortcircuit	
		M	PTM####	Model number	
		R	PTR####	Firmware version	
		Other	PTE	Command not supported	
		R	G	1 ■■■.■	OK / ERR
	2 ■■■.■			OK / ERR	Set the minimum alarm input voltage in V
	3 ■■■.■			OK / ERR	Change the status bit (after start up enabled with SW3 =LOCAL and disabled with SW3 =REMOTE) 999.9 → Inverter enabled 000.0 → Inverter disabled
	4 ■■■.■			OK / ERR	Set the output voltage Phase-neutral in Vrms (Vo)(output must be stopped) 040.0 ≤ ■■■.■ ≤ 230.0
	5 ■■■.■			OK / ERR	Set the maximum output current in Arms 20% I <sub>nom</sub> ≤ ■■■.■ ≤ 100% I <sub>nom</sub>
	6 ■■■.■			OK / ERR	Set the nominal output frequency in Hz (Fo) (output must be stopped) 005.0 ≤ ■■■.■ ≤ 075.0
	7 ■■■.■			OK / ERR	Set the alarm maximum output current 0 < ■■■.■ ≤ 100% I <sub>max_warning</sub>
	8 ■■■.■			OK / ERR	111.1 → Reset the inverter
	L ■■■.■			OK / ERR	Set the minimum input starting voltage in Volts
	O ■■■.■			OK / ERR	Set the initial frequency in the startup (Fi) 005.0 ≤ ■■■.■ ≤ 075.0
	P ■■■.■			OK / ERR	Set the ramp-up in increment of "N" cycles per Hz in mode V/F, frequency changes or start-up (Note-1) 001.0 ≤ ■■■.■ ≤ 100.0
	Q ■■■.■			OK / ERR	Set the ramp-down in decrement of "N" cycles per Hz in mode V/F (Note-1) 002.0 ≤ ■■■.■ ≤ 100.0
	Y ■■■.■			OK / ERR	Change the working mode of the input J4-1,J4-2 111.1 → Input as reverse phase control (default) 222.2 → Input as mid-power control (Note-2)
	X ■■■.■			OK / ERR	Set the mid-power frequency for V/F mode by the use of input J4-1,J4-2 005.0 ≤ ■■■.■ ≤ 75.0
	M	1 ■■■.■	OK / ERR	Set a new output frequency in Hz (output must be run and not stored in memory) 005.0 ≤ ■■■.■ ≤ 075.0	
		2 ■■■.■	OK / ERR	Set a new output voltage in Volts (output must be run and not stored in memory) 040.0 ≤ ■■■.■ ≤ 230.0	
		3 ■■■.■	OK / ERR	Set a new output frequency in Hz in mode V/F (output must be run and not stored in memory) 005.0 ≤ ■■■.■ ≤ 075.0	
		4 ■■■.■	OK / ERR	Changes the output phase order (output must be run and not stored in memory) 111.1 → Phase RST (direct phase) 222.2 → Phase SRT (reverse phase)	


OTHER PORTS PENDING



**Note 1:**

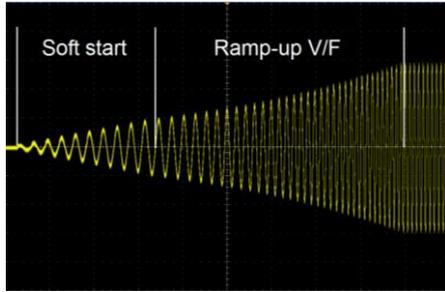


Example for N=1: start-up time = N x 1.7s for changes from 16Hz to 50Hz

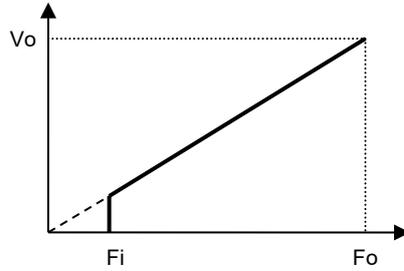

Mode V/F curve

**Note 2 :**

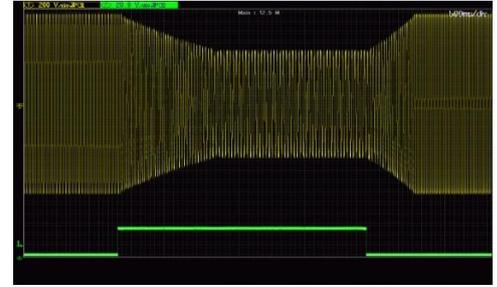


Example for change from 50Hz / 400V to 30Hz and 240V with ramp-down of 2 cycles /Hz and ramp-up de 1 Cycle/Hz. Yellow: output voltage and Green: Mid-Power input signal

**WORKING PARAMETERS** (Configurable parameters underlined)

<b>Thermal protection</b>		
Internal warning temperature (output alarm)	88	°C
Internal shutdown temperature	92	°C
Internal restart temperature	75	°C
Internal temperature of fan start-up	45	°C
<b>Input voltage parameters</b>		
	<b>750V<sub>DC</sub></b>	
High input voltage instantaneous shutdown	1300>	V <sub>DC</sub>
High input voltage timed shutdown (t)	1270 - 1080	V <sub>DC</sub>
Time to shutdown (t)	Controlled via temperature measurement	
Start-up voltage	390	V <sub>DC</sub>
Low input voltage instantaneous shutdown	370	V <sub>DC</sub>
Time to shutdown (t)	500m	s
<b>Output voltage parameters</b>		
<u>Output voltage</u>	400 (line to line)	V <sub>RMS</sub>
Output under-voltage shutdown	< 85% of setting 1000ms	
Warning voltage (output alarm)	< 90% of setting 200ms	
<u>Initial start-up frequency</u>	5	Hz
Soft start duration	1 cycle	
<u>Ramp-up V/F</u>	1 Hz/cycle	
<b>Output current parameters</b>		
<u>Maximum continuous output current</u>	9.24	A
<u>Warning current (output alarm)</u>	8.8	A
Maximum overload I <sup>2</sup> t	See figure below	
Time between restart attempts	4000	ms
Number of attempts of consecutive overload	5	
<b>Working failures and reset</b>		
Lock for continuous overload or internal failure	Unlimited time	
Reset time by input disconnection	> 2	min.


**OVERLOAD PROTECTION**

Protection against overloads and short-circuits	By <b>current</b> limiting at I <sub>0,pk</sub> By <b>I<sup>2</sup>t</b> . The unit shutdowns when the current-time is over the continuous operation curve
Overload protection recovery	Every 4 seconds after shutdown, the unit tries to restart up to 5 times. If the overload persists, the unit reminds shutdown until an <b>input reconnection</b> .

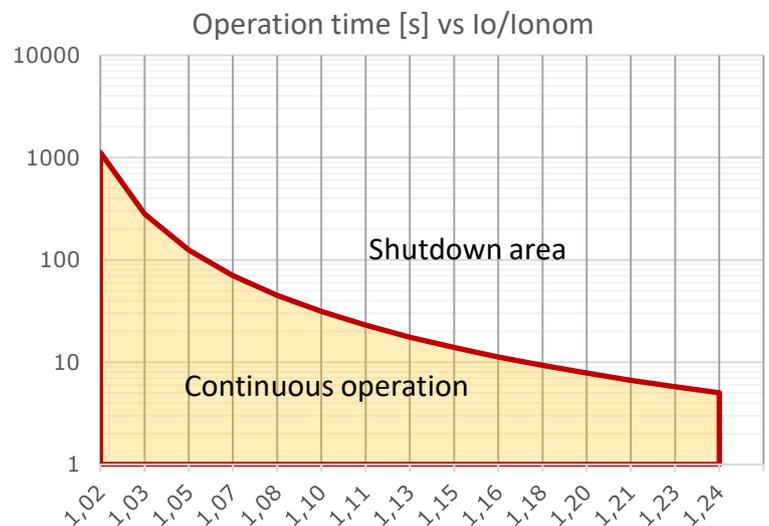




## DIMENSIONS

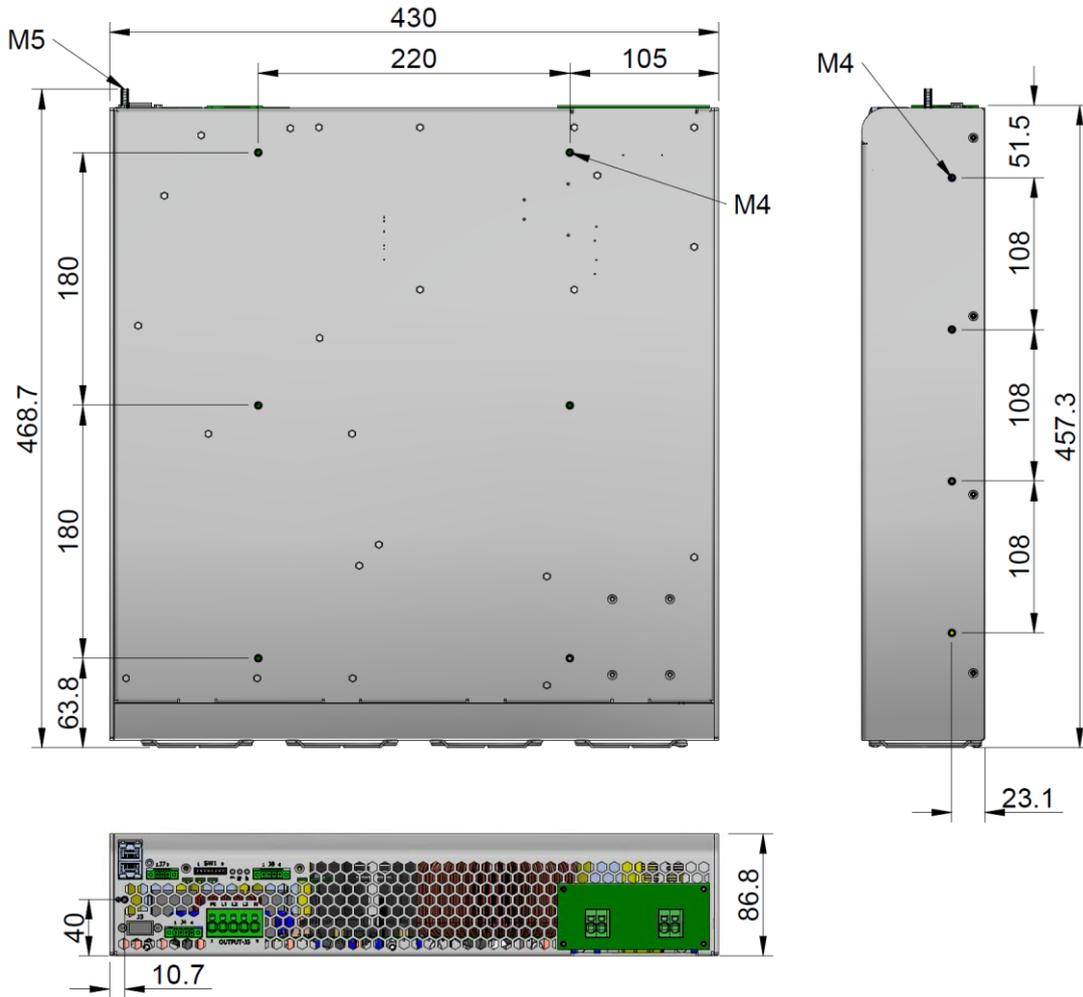

## ACCESSORIES

Description	Notes	CODE
Mounting brackets kit	Contains two brackets and screws	9282

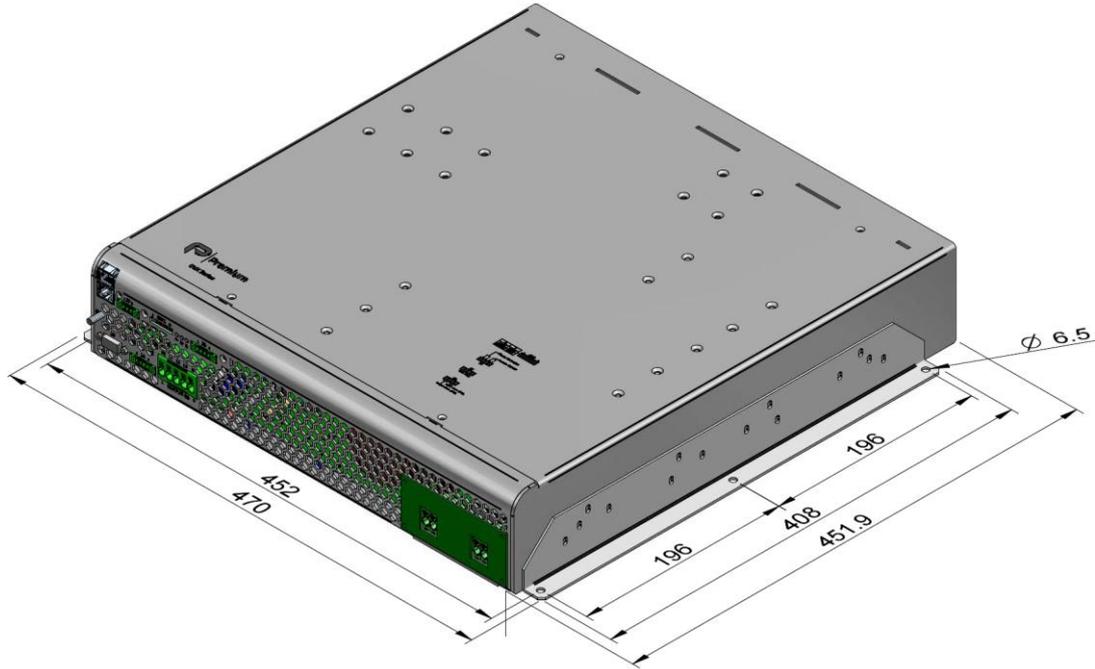

**NP-9282**



## EU, UKCA DECLARATION OF CONFORMITY

The undersigned, representing the following:

Manufacturer: PREMIUM, S. A.,  
Address: C/ Dolors Aleu 19-21, 08908 L'Hospitalet de Llobregat, SPAIN

herewith declares that the product:

Type: DC/AC converter  
Model: **OVX-6400**

is in conformity with the provisions of the following directives or regulations:

2014/35/EU SI 2016 No 1101	Low voltage / The electrical equipment (safety) regulations
2014/30/EU SI 2016 No 1091	EMC / Electromagnetic compatibility regulations
2011/65/EU Annex II and its amendment 2015/863/EU SI 2012 No. 3032	RoHS / Restriction of the use of certain hazardous substances in electrical and electronic equipment

and that standards and/or technical specifications referenced below have been applied:

EN50124-1:2017	Railway app. (Insulation coordination)
EN 62368-1: 2014	Safety. Audio/video information and communication technology equipment
EN 61000-6-3: 2007	Generic emission standard
EN 61000-6-2: 2005	Generic immunity standard
IEC 61287-1: 2015	Railway applications. Power converters installed on board rolling stock
EN 50121-3-2: 2016	Railway applications. EMC Rolling stock equipment

\* Optional, See annexe

CE marking year: **2024**; UKCA marking year: **2024**

### Notes:

For the fulfilment of this declaration the product must be used only for the aim that has been conceived, considering the limitations established in the instructions manual or datasheet.

L'Hospitalet de Llobregat, 10-02-2024

Albert Sole  
Technical Director

**PREMIUM S.A.** is an ISO9001 and ISO14001 certified  
company by **Bureau Veritas**



ANNEXE

Applicable values for the different sections of the norm 61287-1: 2015

4.2.2	Working altitude	Up to 2000m																																																																
4.2.3	Ambient temperature	Class T3 inside vehicle compartment (-25 to 55°C full load) Class T3 Inside cubicle (55 to 70°C load <62.5%)																																																																
4.2.5	Shocks and vibrations	According EN61373:2010 Category 1 class B																																																																
4.5.3.19	EMC Electromagnetic Compatibility EN50121-3-2:2016 IEC62236-3-2:2018	<table border="1"> <thead> <tr> <th>Test</th> <th>Norm</th> <th>Port</th> <th>Frequency</th> <th>Limits</th> </tr> </thead> <tbody> <tr> <td rowspan="4">Radiated emissions</td> <td rowspan="4">IEC55016</td> <td rowspan="4">Case</td> <td>30MHz...230MHz</td> <td>40dB(µV/m) Qpk at 10m</td> </tr> <tr> <td>230MHz...1GHz</td> <td>47dB(µV/m) Qpk at 10m</td> </tr> <tr> <td>1...3GHz</td> <td>Do not apply</td> </tr> <tr> <td>3...6GHz</td> <td>Internal freq. &lt; 108MHz</td> </tr> <tr> <td rowspan="2">Conducted emissions</td> <td rowspan="2">IEC55016</td> <td rowspan="2">Input</td> <td>150kHz...500kHz</td> <td>99dB(µV) Qpk</td> </tr> <tr> <td>500kHz...30MHz</td> <td>93dB(µV) Qpk</td> </tr> </tbody> </table>	Test	Norm	Port	Frequency	Limits	Radiated emissions	IEC55016	Case	30MHz...230MHz	40dB(µV/m) Qpk at 10m	230MHz...1GHz	47dB(µV/m) Qpk at 10m	1...3GHz	Do not apply	3...6GHz	Internal freq. < 108MHz	Conducted emissions	IEC55016	Input	150kHz...500kHz	99dB(µV) Qpk	500kHz...30MHz	93dB(µV) Qpk																																									
		Test	Norm	Port	Frequency	Limits																																																												
		Radiated emissions	IEC55016	Case	30MHz...230MHz	40dB(µV/m) Qpk at 10m																																																												
					230MHz...1GHz	47dB(µV/m) Qpk at 10m																																																												
					1...3GHz	Do not apply																																																												
					3...6GHz	Internal freq. < 108MHz																																																												
		Conducted emissions	IEC55016	Input	150kHz...500kHz	99dB(µV) Qpk																																																												
					500kHz...30MHz	93dB(µV) Qpk																																																												
		<table border="1"> <thead> <tr> <th>Test</th> <th>Norm</th> <th>Port</th> <th>Severity</th> <th>Conditions</th> <th>P</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Electrostatic discharge</td> <td rowspan="2">IEC61000-4-2</td> <td rowspan="2">Case</td> <td>±8kV</td> <td>Air (isolated parts)</td> <td rowspan="2">B</td> </tr> <tr> <td>±8kV</td> <td>Contact (conductive parts)</td> </tr> <tr> <td rowspan="4">Radiated high frequency</td> <td rowspan="4">IEC61000-4-3</td> <td rowspan="4">X/Y/Z Axis</td> <td>20V/m</td> <td>0.08...1.0GHz M. 80% 1kHz</td> <td rowspan="4">A</td> </tr> <tr> <td>10V/m</td> <td>1.4...2.1GHz M. 80% 1kHz</td> </tr> <tr> <td>5V/m</td> <td>2.1...2.5GHz M. 80% 1kHz</td> </tr> <tr> <td>3V/m</td> <td>5.1...6GHz M. 80% 1kHz</td> </tr> <tr> <td rowspan="4">Fast transients</td> <td rowspan="4">IEC61000-4-4</td> <td>Input</td> <td>±2kV</td> <td rowspan="4">Tr/Th: 5/50 ns</td> <td rowspan="4">A</td> </tr> <tr> <td>Output</td> <td>±2kV</td> </tr> <tr> <td>Signal</td> <td>±2kV</td> </tr> <tr> <td>PE</td> <td>±1kV</td> </tr> <tr> <td rowspan="2">Surge</td> <td rowspan="2">IEC61000-4-5</td> <td>Input L to L</td> <td>±1kV</td> <td rowspan="2">Tr/Th: 1.2/50µs</td> <td rowspan="2">B</td> </tr> <tr> <td>Input L to PE</td> <td>±2kV</td> </tr> <tr> <td rowspan="4">Conducted RF</td> <td rowspan="4">IEC61000-4-6</td> <td>Input</td> <td>10V</td> <td rowspan="4">0.15...80MHz M. 80% 1kHz</td> <td rowspan="4">A</td> </tr> <tr> <td>Output</td> <td>10V</td> </tr> <tr> <td>Signal</td> <td>10V</td> </tr> <tr> <td>PE</td> <td>10V</td> </tr> <tr> <td>Magnetic field</td> <td>IEC61000-4-8</td> <td>X/Y/Z Axis</td> <td>300A/m</td> <td>0Hz, 16.7Hz, 50/60Hz</td> <td>A</td> </tr> </tbody> </table>	Test	Norm	Port	Severity	Conditions	P	Electrostatic discharge	IEC61000-4-2	Case	±8kV	Air (isolated parts)	B	±8kV	Contact (conductive parts)	Radiated high frequency	IEC61000-4-3	X/Y/Z Axis	20V/m	0.08...1.0GHz M. 80% 1kHz	A	10V/m	1.4...2.1GHz M. 80% 1kHz	5V/m	2.1...2.5GHz M. 80% 1kHz	3V/m	5.1...6GHz M. 80% 1kHz	Fast transients	IEC61000-4-4	Input	±2kV	Tr/Th: 5/50 ns	A	Output	±2kV	Signal	±2kV	PE	±1kV	Surge	IEC61000-4-5	Input L to L	±1kV	Tr/Th: 1.2/50µs	B	Input L to PE	±2kV	Conducted RF	IEC61000-4-6	Input	10V	0.15...80MHz M. 80% 1kHz	A	Output	10V	Signal	10V	PE	10V	Magnetic field	IEC61000-4-8	X/Y/Z Axis	300A/m	0Hz, 16.7Hz, 50/60Hz	A
		Test	Norm	Port	Severity	Conditions	P																																																											
		Electrostatic discharge	IEC61000-4-2	Case	±8kV	Air (isolated parts)	B																																																											
					±8kV	Contact (conductive parts)																																																												
		Radiated high frequency	IEC61000-4-3	X/Y/Z Axis	20V/m	0.08...1.0GHz M. 80% 1kHz	A																																																											
					10V/m	1.4...2.1GHz M. 80% 1kHz																																																												
					5V/m	2.1...2.5GHz M. 80% 1kHz																																																												
3V/m	5.1...6GHz M. 80% 1kHz																																																																	
Fast transients	IEC61000-4-4	Input	±2kV	Tr/Th: 5/50 ns	A																																																													
		Output	±2kV																																																															
		Signal	±2kV																																																															
		PE	±1kV																																																															
Surge	IEC61000-4-5	Input L to L	±1kV	Tr/Th: 1.2/50µs	B																																																													
		Input L to PE	±2kV																																																															
Conducted RF	IEC61000-4-6	Input	10V	0.15...80MHz M. 80% 1kHz	A																																																													
		Output	10V																																																															
		Signal	10V																																																															
		PE	10V																																																															
Magnetic field	IEC61000-4-8	X/Y/Z Axis	300A/m	0Hz, 16.7Hz, 50/60Hz	A																																																													
<p>P= Performance criteria, L= Line, PE= Protective Earth</p>																																																																		
4.5.2.3	Tests list	1 Visual Inspection	Routine																																																															
		2 Verification of size and tolerance	Type																																																															
		3 Weight	Type																																																															
		4 Marking inspection	Routine																																																															
		5 Functional test on refrigeration system	Type																																																															
		6 Sealing test	N/A																																																															
		7 Grade protection test	N/A																																																															
		8 Dielectric strength test	Routine																																																															
		9 Resistance to isolation test	Type																																																															
		10 Test for mechanical and electrical protection and for the measurement equipment	N/A																																																															
		11 Low load test	Type																																																															
		12 Switching test	Routine																																																															
		13 Measurement of acoustic noise	Routine																																																															
		14 Heating test	Type																																																															
		15 Power loss test	Type																																																															
		16 Power overvoltage test and energy transients	Type																																																															
		17 Fast changes in load test	Type																																																															
		18 Inspection of safety requirements	Type																																																															
		19 Shock and vibration test	Type																																																															
		20 EMC test	Type																																																															
		21 Step in power line test	Type																																																															
		22 Interruption of voltage supply test	Type																																																															
		23 Current Sharing	Type																																																															