


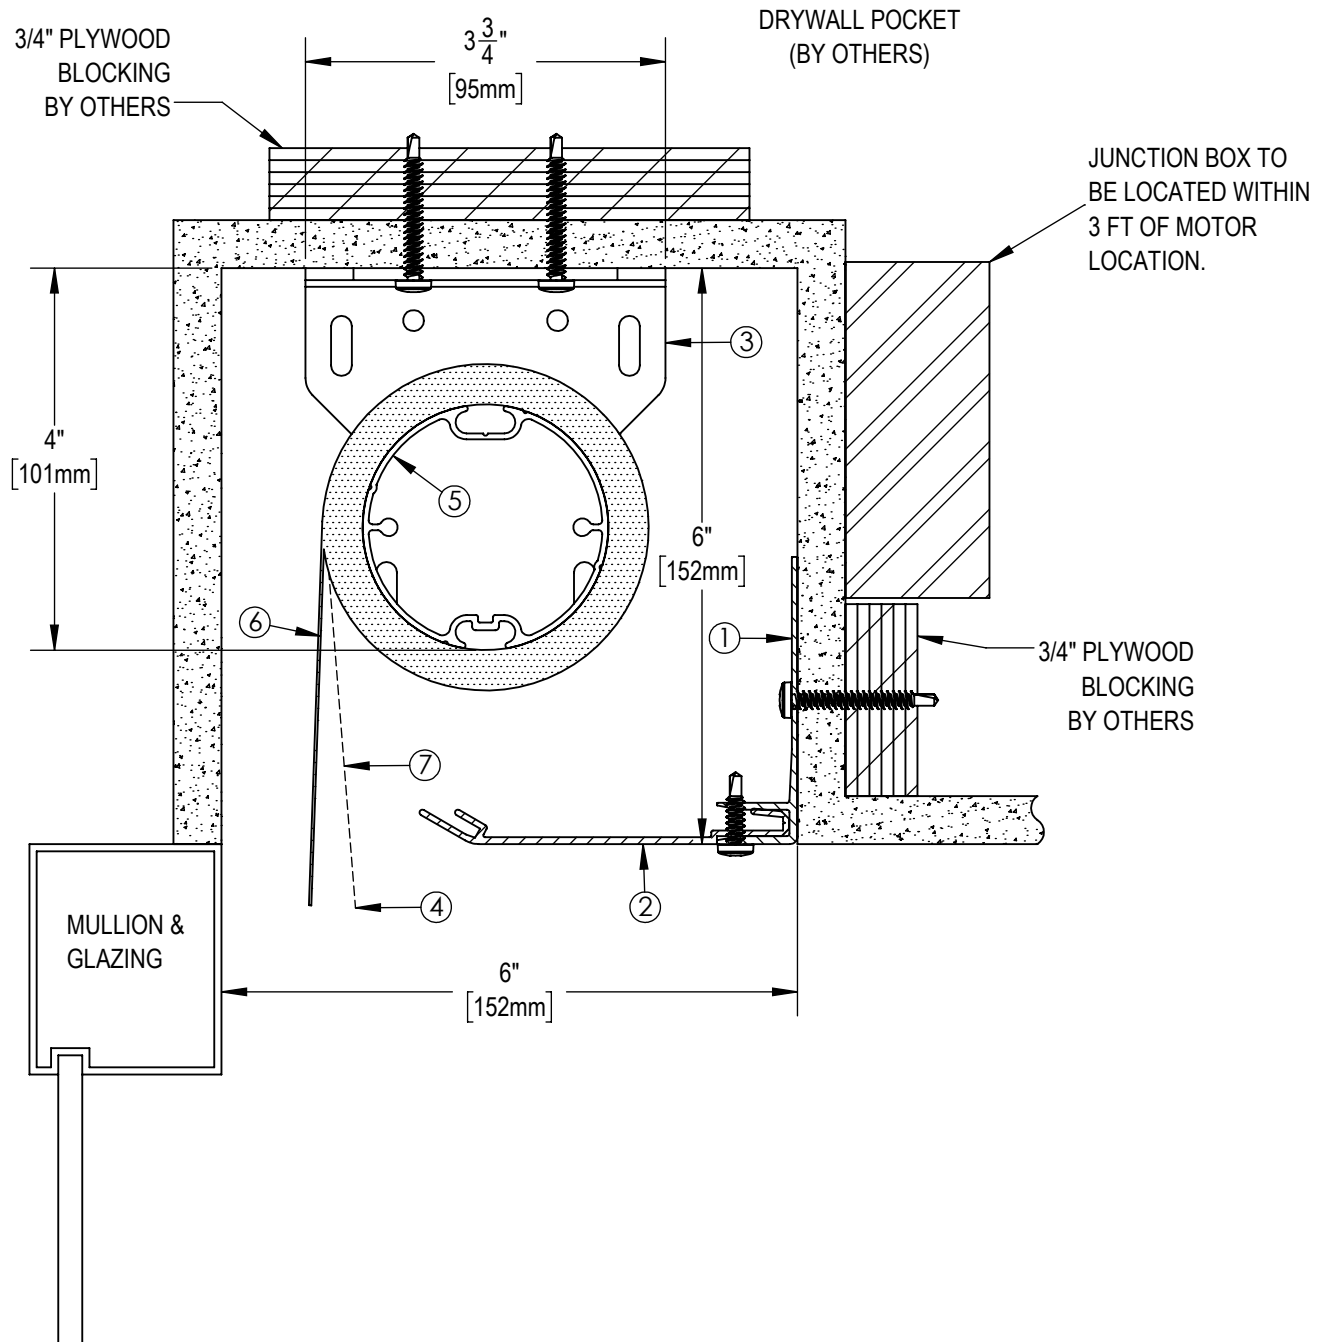

NOTES:

1. EXTRUDED ALUMINUM HANGER
2. 4" EXTRUDED ALUMINUM CLOSURE
3. END BRACKET
4. 1/2" EXTRUDED ALUMINUM HEMTUBE
5. 2 1/2" OR 3 1/2" ϕ EXTRUDED ALUMINUM TUBE
6. FABRIC: 1%, 3%, 5%, 10% OPENNESS OR BLACKOUT
7. FABRIC: 1%, 3%, 5%, 10% OPENNESS OR BLACKOUT

**** NOTE ****

JUNCTION BOX TO BE LOCATED WITHIN 3 FT OF MOTOR LOCATION. MOTOR LOCATION TO BE DETERMINED WITH SOLARFECTIVE REPRESENTATIVE.



Solarfective

EXCLUSIVELY BY ELITE PRO

eliteproshading.com | solarfective@eliteproshading.com

ES SHADE 6 DUPLEX IN POCKET

DATE:

APR 1, 2019

SCALE:

1:2

DOCUMENT NUMBER:

SF-ES4

REVISION:

-