


# SPARTA

Blackout



White/White

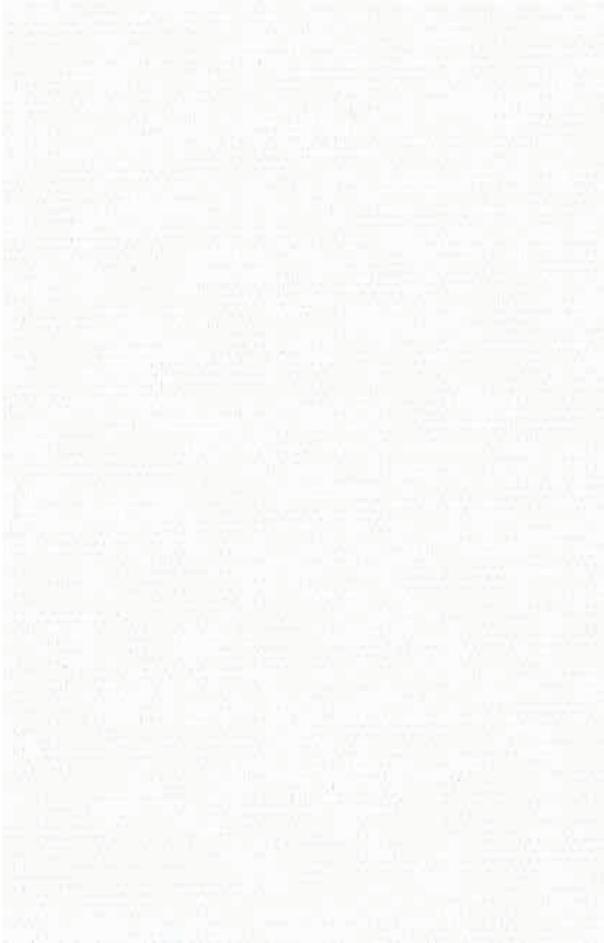


Chalk/White




Gypsum/White




Pewter/White

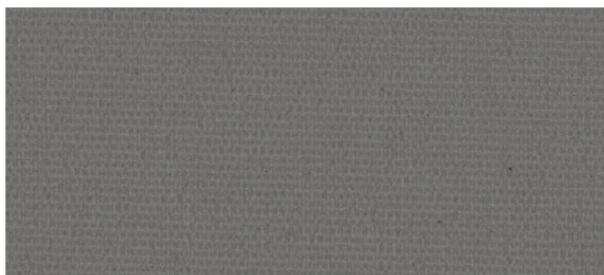


Pewter/Pewter

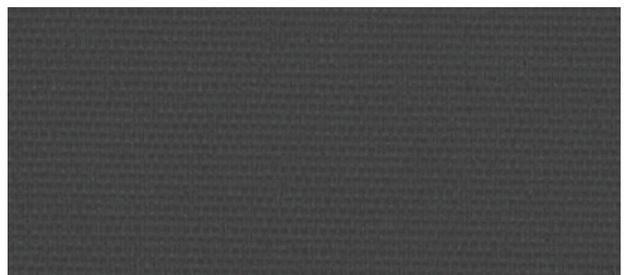

Emery/White

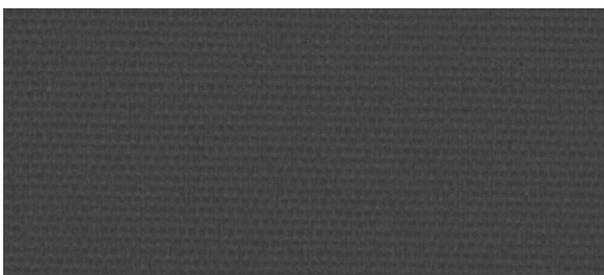

Emery/Emery

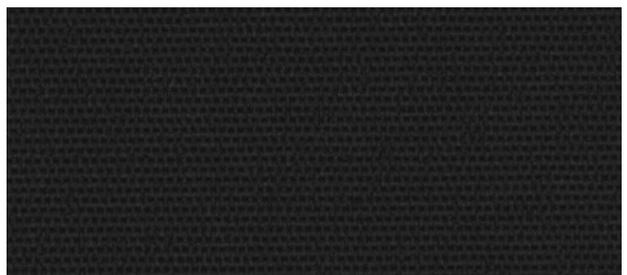

Black/White

# SPARTA

## Specifications



### COMPOSITION

33% Polyester, 67% Acrylic



### WEAVE STYLE

Plain Weave with Blackout Lining



### WIDTH

124" (315 cm)



### FABRIC WEIGHT

336 g/m<sup>2</sup> (9.9 oz/sqyd)



### FABRIC THICKNESS

0.35 mm (0.014") ± 5%



### UV BLOCKAGE

100%



### GREEN STANDARDS

GreenGuard Gold  
Fungal Resistance -  
ASTM E2180  
RoHS - Lead Free



### FIRE CLASSIFICATION

NFPA 701-19 TM#1,  
California U.S. Title 19  
CAN/ULC-S109-14 Small &  
Large Flame Test



### CERTIFICATIONS



## SPARTA | Blackout

Colour	Rs	As	Ts	Tv	SHGC
White/White	71%	29%	0%	0%	0.23
Pewter/Pewter	18%	82%	0%	0%	0.51
Emery/Emery	9%	91%	0%	0%	0.55
Chalk/White	73%	27%	0%	0%	0.22
Gypsum/White	72%	28%	0%	0%	0.22
Pewter/White	72%	28%	0%	0%	0.23
Emery/White	73%	27%	0%	0%	0.22
Black/White	72%	28%	0%	0%	0.22

As (Solar absorption) + Rs (Solar Reflection) + Ts (Solar Transmission) = 100% of solar energy. Tv = Visible Light Transmission. SHGC = Solar Heat Gain Coefficient is measured using 1/4" heat absorbing glass + fabric All performance values are measured within tolerances of ±5%.

Contact ELITE PRO for larger fabric swatches.

© 2023, ELITE PRO, A division of Elite Vertical Blinds Mfg. Co. Ltd.