



THE TELESHADE CAN BE MOUNTED
TO THE CEILING OR TO THE WALL
ABOVE THE MULLION

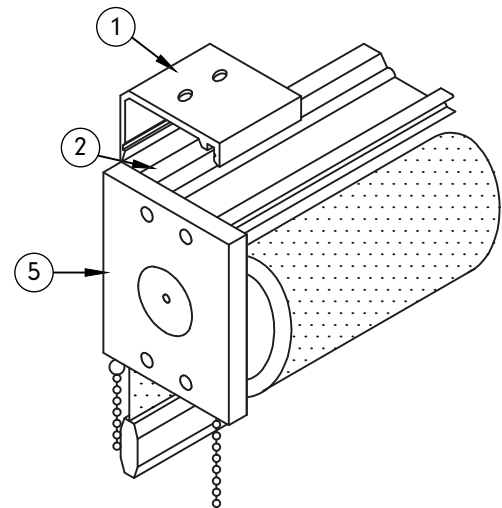

NOTES:

1. MOUNTING ANGLE
2. CONTINUOUS SPRING CLIP
3. EXTRUDED ALUMINUM EXTERIOR HEMBAR
4. STAINLESS STEEL BALL CHAIN
5. ABS END BRACKETS
6. 1 1/2" Ø EXTRUDED ALUMINUM TUBE
7. FABRIC: 1%, 3%, 5%, 10% OPENNESS OR BLACKOUT

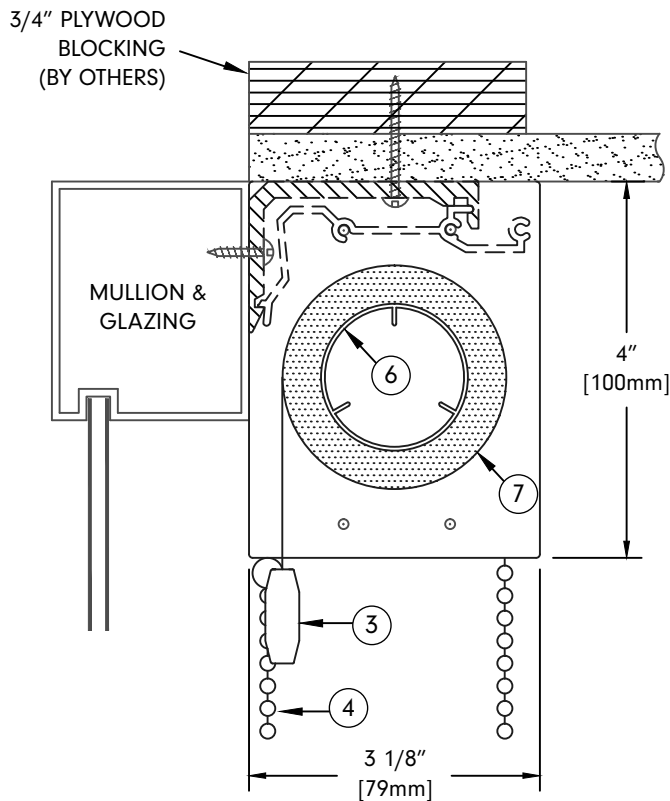

SOLARFECTIVE PRODUCTS

Phone: 1-800-387-3566
E-mail: solarfective@eliteproshading.com

TELESHADE (TS) SYSTEM WITH CONTINUOUS SPRING CLIP

PROJECT:

DATE:

Jan 1, 2017

SCALE:

1:2

FILE No.

DWG. No.

SF-T1B