


Multi-Rib (AG)

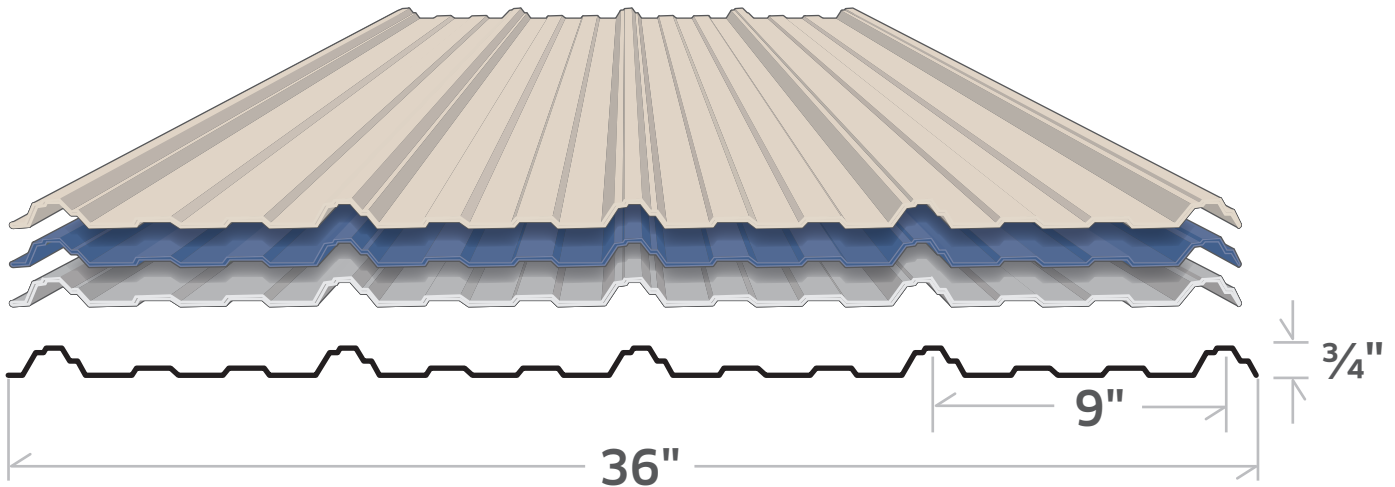

Min Roof Slope: 1/2:12 - 2:12 with Lap Sealant 3:12 and above without sealant

Screw spacing: 24" O.C.

Approved Fastener: minimum #10x1-1/2" Woodscrew

Colors 29ga: Galvalume, Ash Gray, Burnished Slate, Charcoal Grey, Desert Sand, Evergreen, Koko Brown, Light Stone, Polar White, Rustic Red, Saddle Tan

Colors 26ga: Galvalume, Ash Grey, Black, Burnished Slate, Charcoal Grey, Copper Metallic, Colony Green, Desert Sand, Evergreen, Hawaiian Blue, Koko Brown, Light Stone, Polar White, Rustic Red, Saddle Tan

Finish Warranty: Sherwin Williams - Weather XL
Siliconized Polyester coating 40yr limited

Florida Building Code Product approvals:
All engineering complies with 2020 FBC 7th Edition

- | | |
|----------------------|--|
| Roof - FL23490.1 R3: | • over 2x4 open framing |
| Roof - FL24096.1 R3: | • over 1x4, over shingles (optional), over plywood |
| Roof - FL24096.2 R3: | • over shingles (optional), over plywood |
| Wall - FL31397.1 R1: | • over 2x4 open framing |

Job specific engineering is available for alternate substrates.