



Engineer of Record for the Structure
Structural Systems of N. Fl, Inc.
Raul Reyes, PE 88925
1634 SE 47th Street #3
Cape Coral, FL 33904

This document has been reviewed for
conformance with the design intent of the
structure and specified design criteria.


☒ Accepted As-Is ☐ Accepted As Noted ☐ Revise and Resubmit

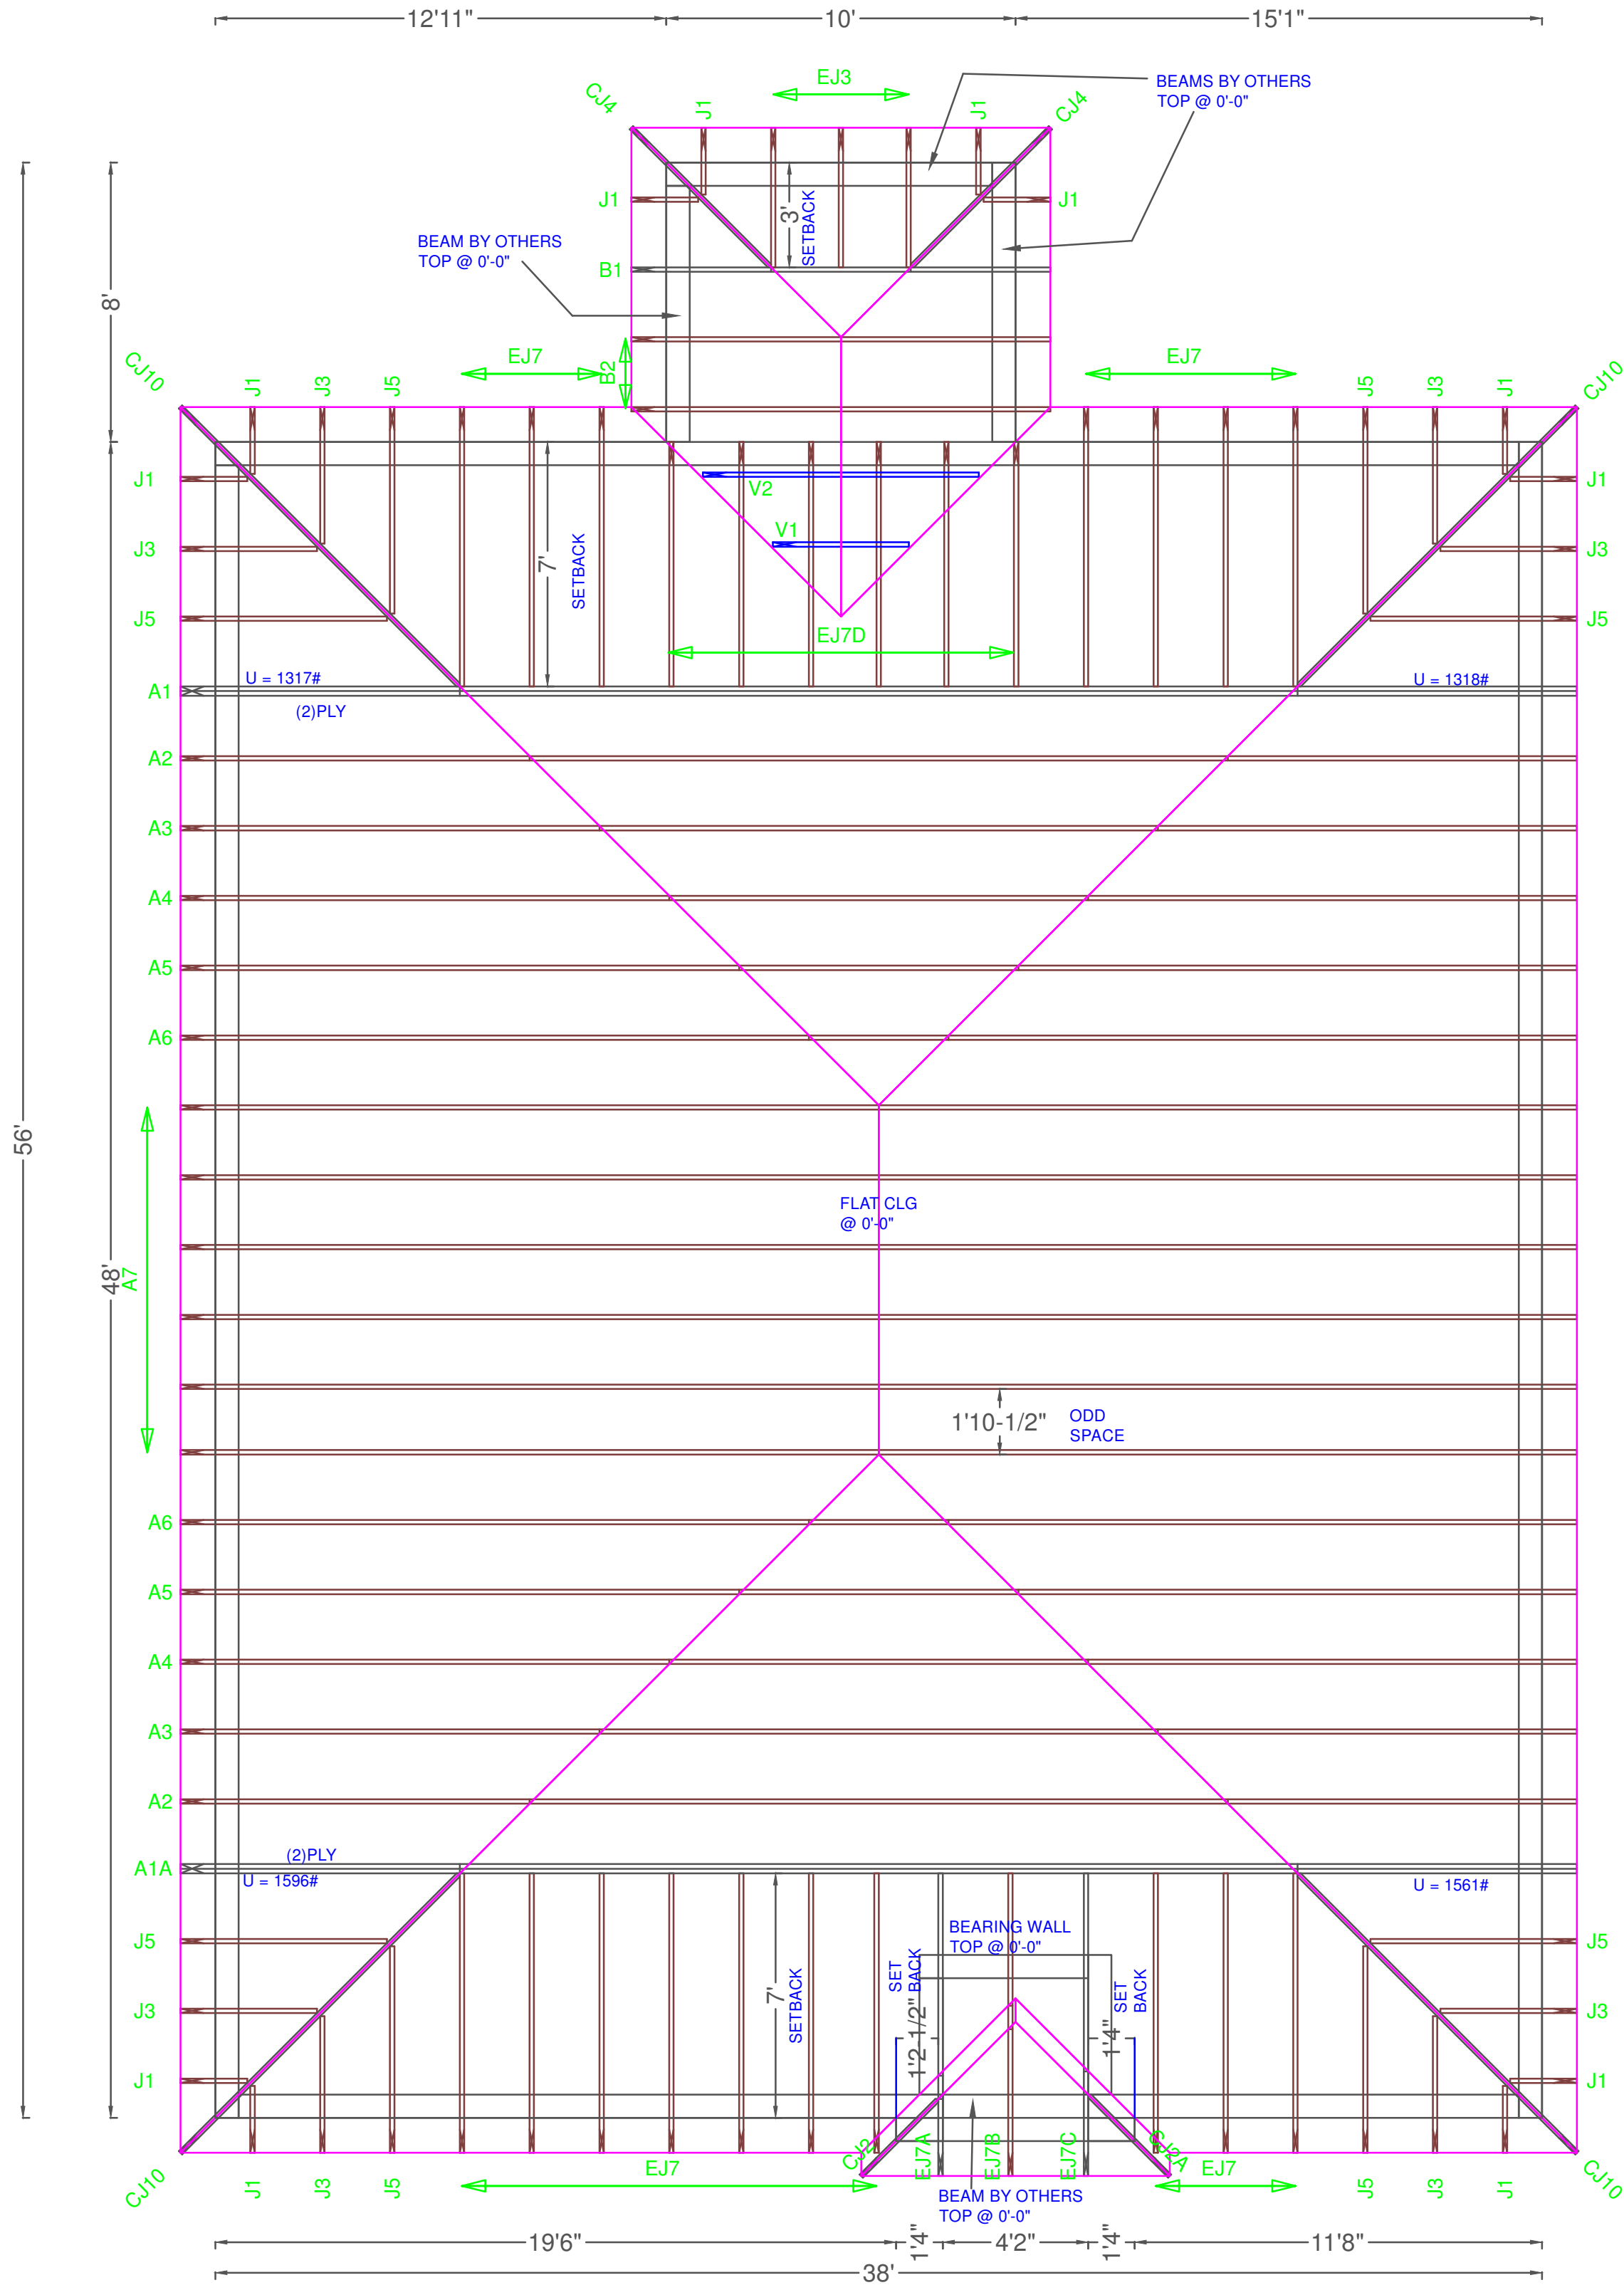


L:\O-New Data\1 - MASTER 2019\2019-BUILDERS\DK HORTON 2019\5SUBDIVISIONS\LEHIGH SPOT LOTS\13154 LOT 9 BLK 263 1369 BLUREVIT\13154 1369 BL.rvt

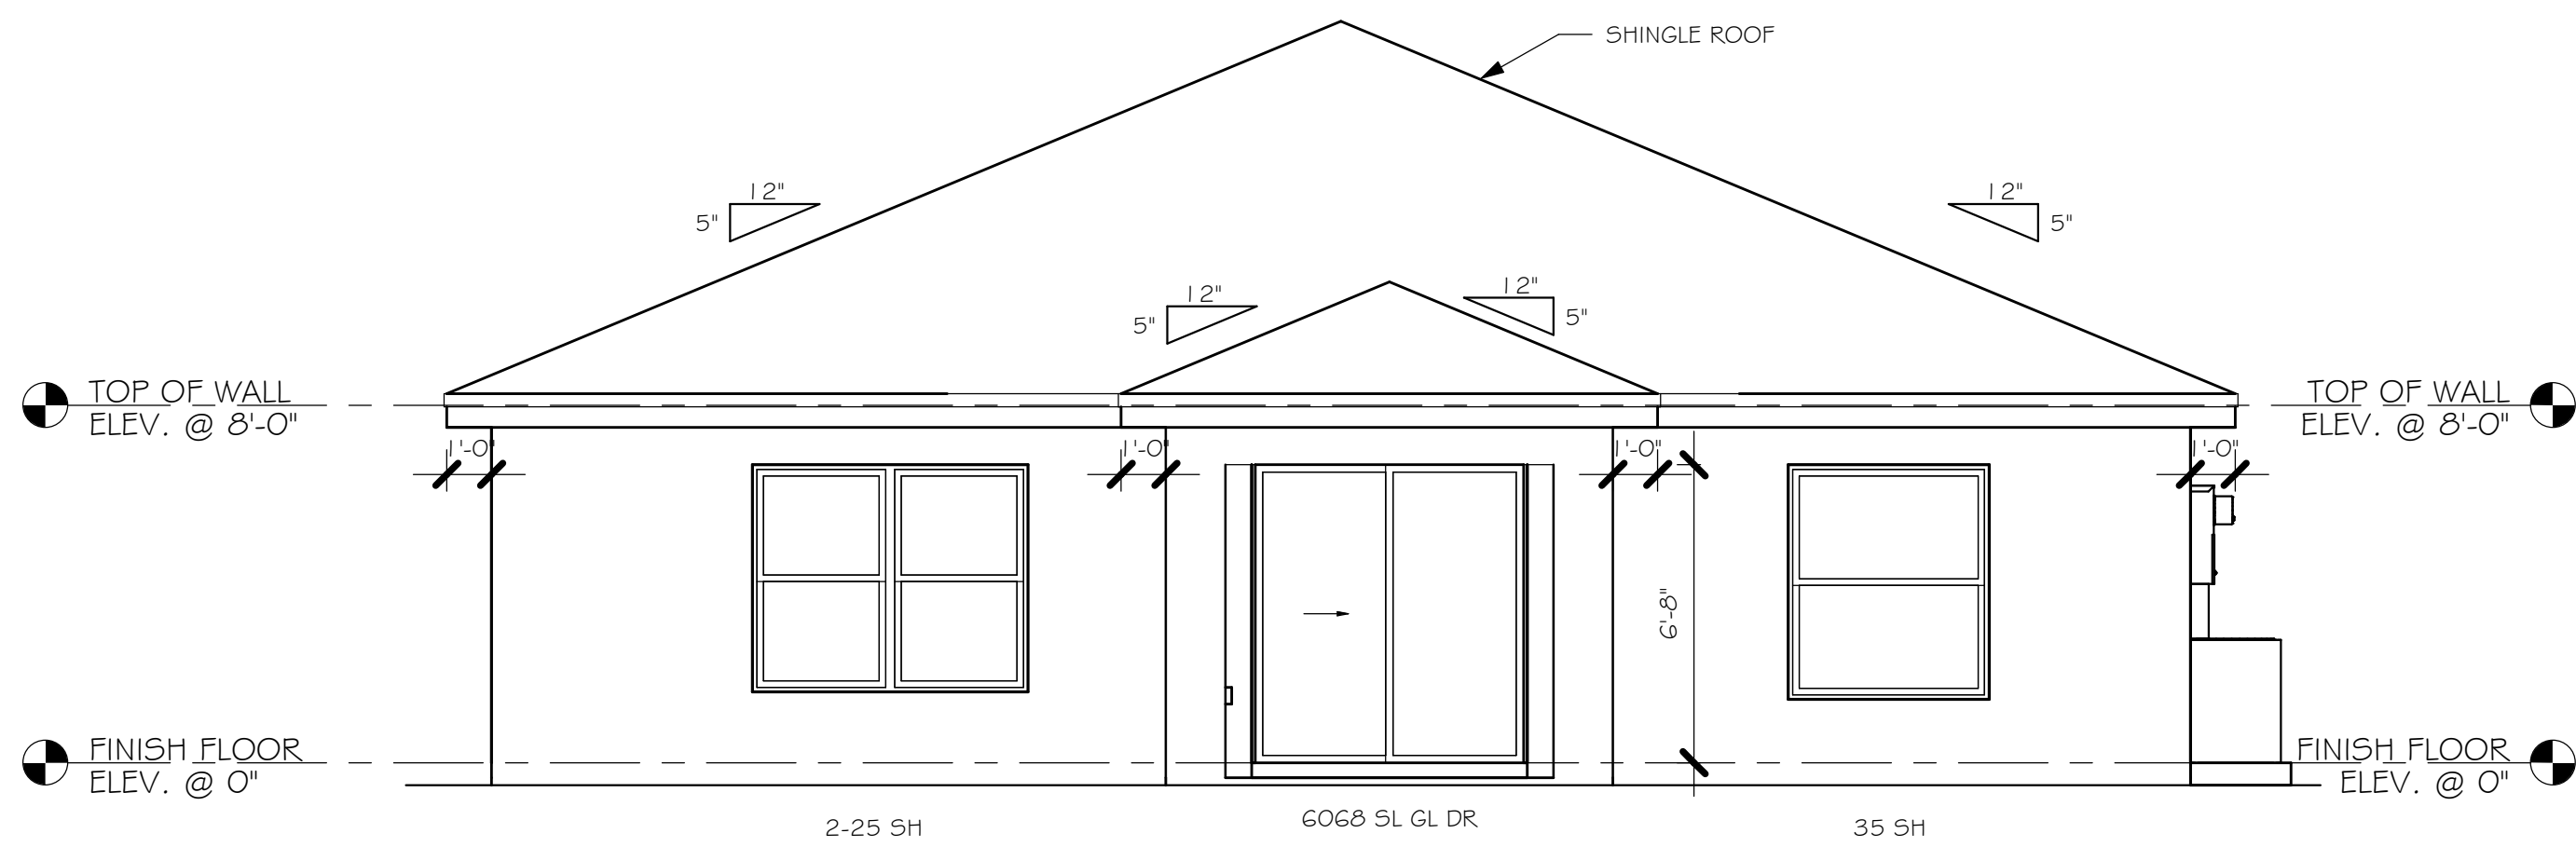


REAR ELEVATION
1/4" = 1'-0"

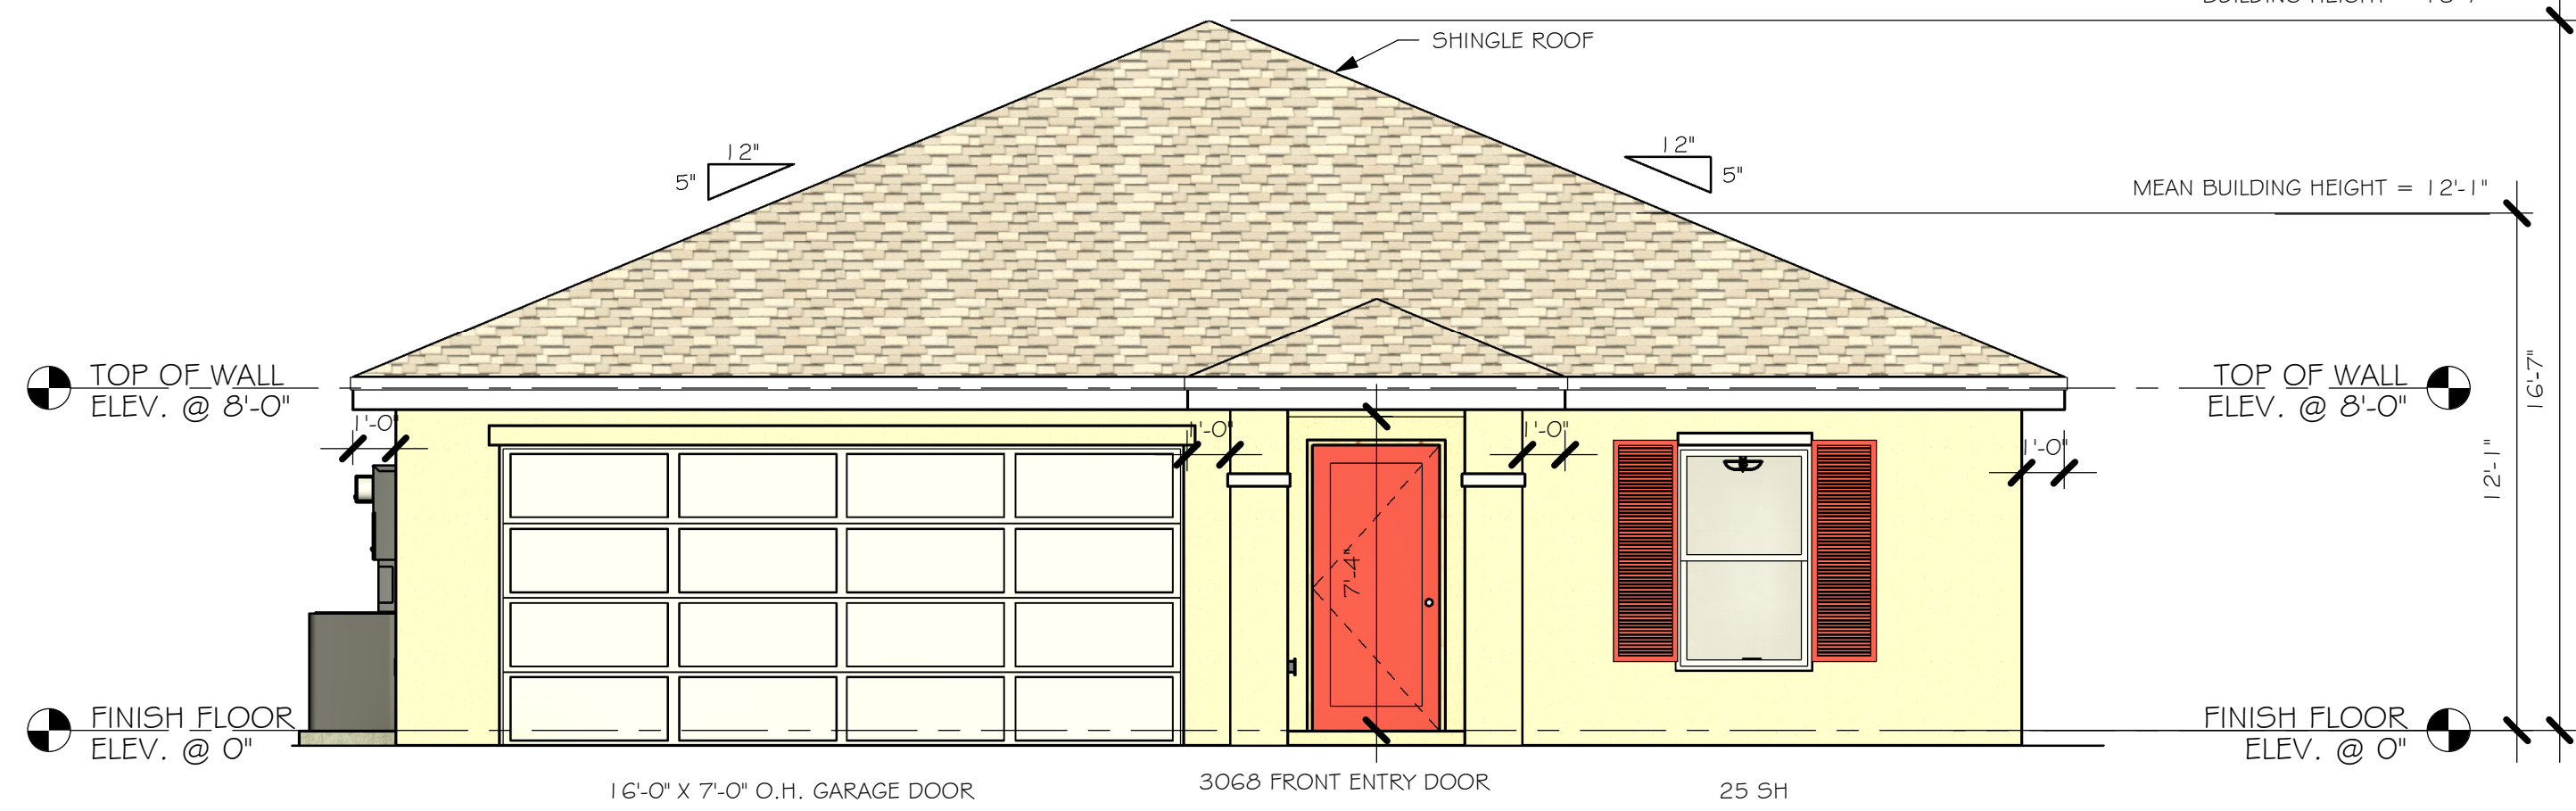

FRONT ELEVATION
1/4" = 1'-0"

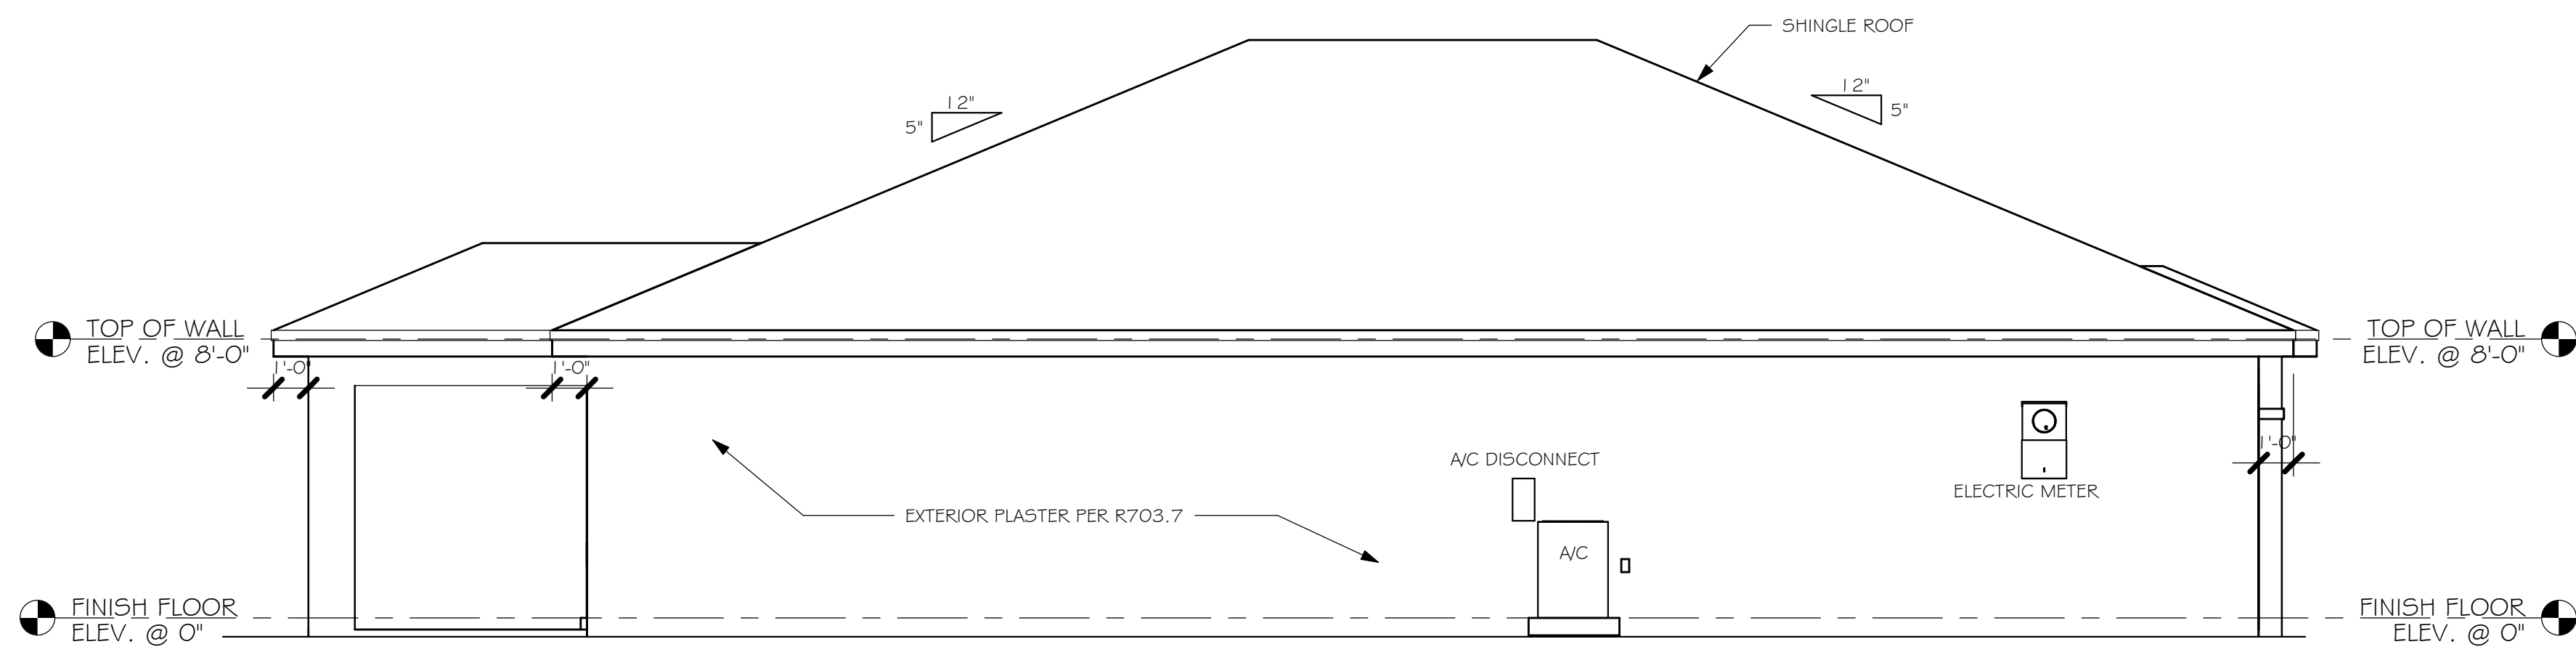

LEFT ELEVATION
1/4" = 1'-0"

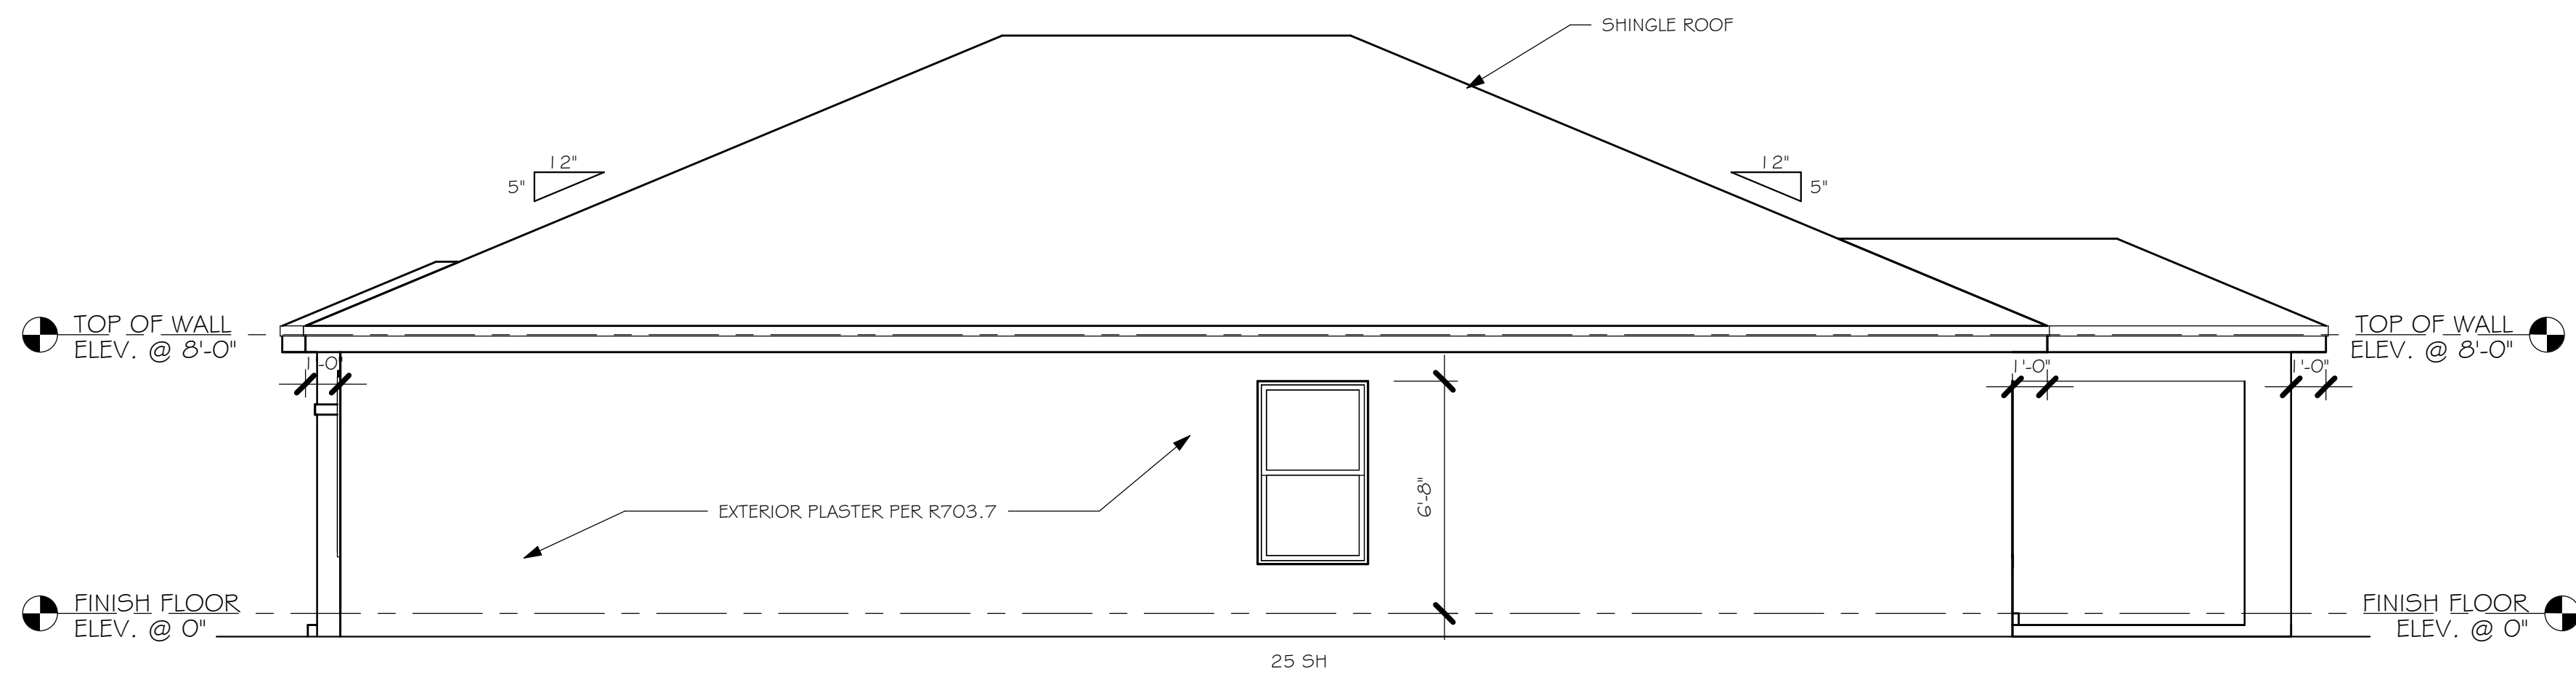

RIGHT ELEVATION
1/4" = 1'-0"

FLORIDA BUILDING CODE 7TH EDITION

OCCUPANCY: FBC 310.5 RESIDENTIAL GROUP R-3
CONSTRUCTION TYPE: V-B (FIRE RESISTANCE RATING 0 HOURS, NOT SPRINKLED)

CODES TO BE USED BY OTHER DESIGN PROFESSIONALS AND LICENSED CONTRACTORS:
2020 FLORIDA BUILDING CODE, 7TH EDITION: RESIDENTIAL; ACCESSIBILITY; ENERGY CONSERVATION;
PLUMBING; MECHANICAL; AND FUEL GAS.
ELECTRICAL IS CONTAINED BY REFERENCE WITHIN FBC RESIDENTIAL CHAPTER 34: NFPA 70-17
NATIONAL ELECTRICAL CODE.

DESIGN IN ACCORDANCE WITH THE RESIDENTIAL
FLORIDA BUILDING CODE 2020 - 7TH EDITION




Gulf Coast
Drafting & Design, Inc.
EMAIL: PLANS@GULFCOASTDRAFTING.COM
PHONE: 239-540-8223
1515 SE 47th ST. CAPE CORAL, FL 33904

LOT: 9	BLOCK: 283
SUBDIVISION: LEHIGH SPOT LOTS	
ADDRES: 661 LOMOND ST	
D.R.H. #: 579070233	

MODEL # 1389 B	GCD JOB # 13154
-------------------	-----------------

DATE:	07/30/21
DRAWN BY:	JSL
CHECKED BY:	JWC
REVISED:	
PLAN:	ELEVATION
SCALE:	As indicated

A-1



A-2

L:\O-New Data\1 -MASTER 2019\2019-BUILDERS\DK HORTON 2019\SUBDIVISIONS\LEHIGH SPOT LOTS\13154 LOT 9 BLK 263 1369 BLUREVIT\13154 1369 BL.rvt

DOOR SCHEDULE					
TYPE MARK	DESCRIPTION	MANUFACTURER	HEIGHT	WIDTH	COUNT
1	3068 ENTRY	DISTINCTION	6'-8"	3'-0"	1
2	2-3068 SL. GL. DR.	DISTINCTION	6'-8"	6'-0"	1
3	16070 OHGD	GARAGE DOOR	7'-0"	16'-0"	1

WINDOW SCHEDULE					
MARK	DESCRIPTION	MANUFACTURER	HEIGHT	WIDTH	COUNT
A	2-25 SH		5'-3"	6'-4"	1
B	25 SH		5'-5"	3'-4"	2
C	35 SH		5'-5"	4'-8"	1

DOOR HEADERS		
6'-8" BI-FOLD	HEADER HEIGHT	82" A.F.F.
6'-8" SWING	HEADER HEIGHT	82 1/2" A.F.F.
8'-0" SWING	HEADER HEIGHT	98 1/2" A.F.F.




PLAN NOTES	
1)	VERIFY ALL ROUGH OPENING DIMENSIONS FOR ALL WINDOWS AND DOORS
2)	PROVIDE SAFETY GLAZING WITHIN 24" FROM EXIT PER FLORIDA BUILDING CODE R 308.4.2.
3)	PROVIDE SAFETY GLAZING AT BATH/ SHOWER PER FLORIDA BUILDING CODE R 308.4.5.
4)	NON BEARING INTERIOR FRAME WALLS SHALL BE FRAMED W/ WOOD OR METAL STUDS. SPACING SHALL NOT EXCEED 24" O.C. (NON BEARING WALLS ONLY)
5)	PROVIDE DEAD WOOD IN ATTIC FOR OVERHEAD GARAGE DOOR HARDWARE
6)	KITCHEN KNEE WALL TO BE FRAMED W/ TOP @ 34 1/2" A.F.F.
7)	INSTALL SMOOTH WALLS IN KITCHEN AND ALL BATHROOM AREAS
8)	WHERE DRYWALL CEILING IS APPLIED TO TRUSSES @ 24" O.C. USE 5/8" DRYWALL OR 1/2" SAG RESISTANT PER SEC. R702.3.5
9)	THE GARAGE SHALL BE SEPARATED FROM THE RESIDENCE & ATTIC BY NOT LESS THEN 1/2" GYPSUM BOARD APPLIED TO THE GARAGE SIDE. GARAGES BENEATH HABITABLE ROOMS SHALL BE SEPARATED WITH NOT LESS THAN 5/8" TYPE "X" GYPSUM BOARD OR EQUIVALENT. WHERE THE SEPARATION IS A FLOOR - CEILING ASSEMBLY, THE STRUCTURE SUPPORTING THE SEPARATION SHALL ALSO BE PROTECTED BY NOT LESS THAN 1/2" GYPSUM BOARD OR EQUIVALENT
10)	INSTALL 1 - 3/8" THICK SOLID WOOD DOOR BETWEEN LIVING AND GARAGE PER FLORIDA BUILDING CODE R302.5.1.
11)	ALL WINDOWS INSTALLED 72" ABOVE GRADE MUST COMPLY WITH R312.2 MIN 24" SILL HEIGHT OR PROVIDED WITH AN APPROVED WINDOW FALL PREVENTION DEVICE
12)	ALL CLOSET SHELVES TO BE 12". ALL PANTRY & LINEN TO BE (4)-16" SHELVES 18" O.F.F. W/ 15" INCREMENT.
13)	ALL MECHANICAL AND ELECTRICAL EQUIPMENT TO BE INSTALLED AT OR ABOVE FLOOD PLUS 1'-0" FREEBOARD.

CABINET BACKING		
KITCHEN	UPPER TOP @ 84"	BASE TOP @ 35"
MASTER BATH	UPPER	BASE TOP @ 35"
GUEST BATH	UPPER	BASE TOP @ 31"
LAUNDRY ROOM	UPPER TOP @ 84"	BASE

INTERIOR DOOR SCHEDULE		
MARK	DOOR WIDTH	NOTES
1	3'-0"	P.K. = POCKET DOOR
2	2'-8"	
3	2'-6"	B.F. = BI-FOLD DOOR
4	2'-4"	B.P. = BI-PASS DOOR
5	2'-0"	
6	1'-8"	L.V. = LOUVERED DOOR
7	1'-6"	
8	2'-11"	

SQUARE FOOTAGE	
LIVING AREA	1,389
GARAGE AREA	419
LANAI AREA	80
FRONT PORCH/ ENTRY AREA	16
TOTAL SQUARE FOOTAGE	1,904

BATHROOM NOTES	
TB TOWEL BAR	ALL TUB DECKS @ 21" A.F.F
TP TOILET PAPER	ALL BLOCKING TO BE PT IN SHOWERS

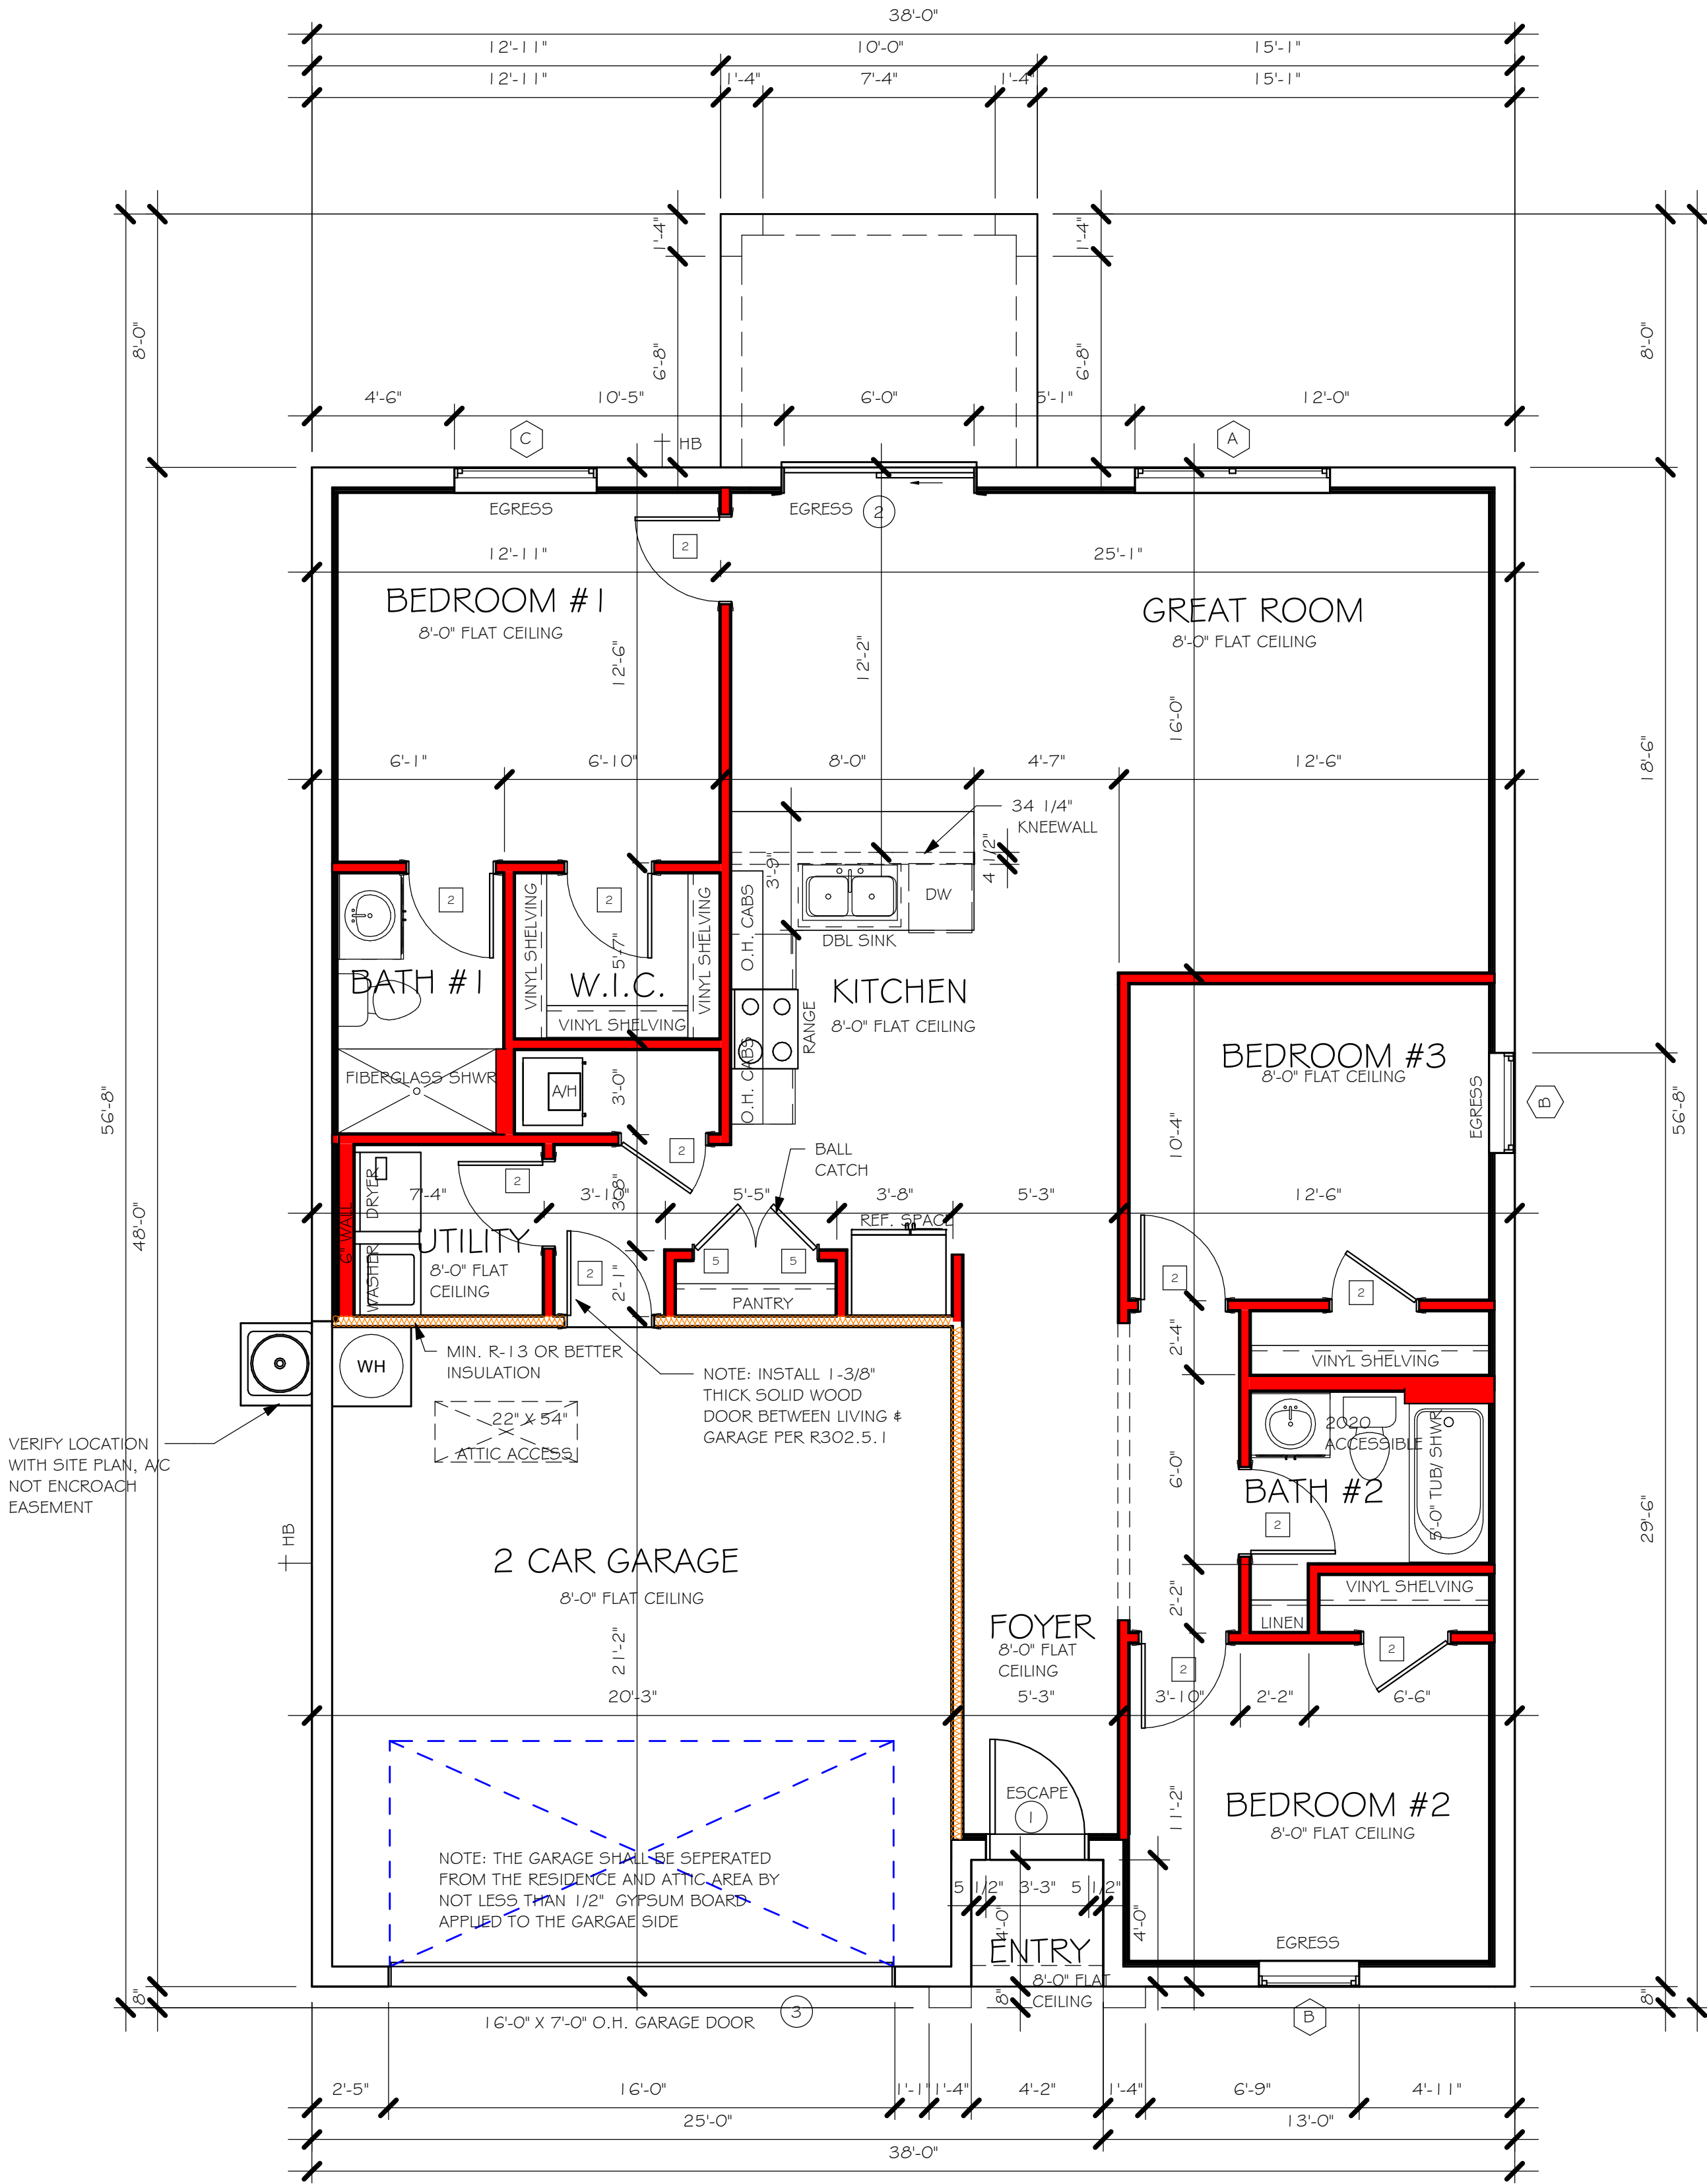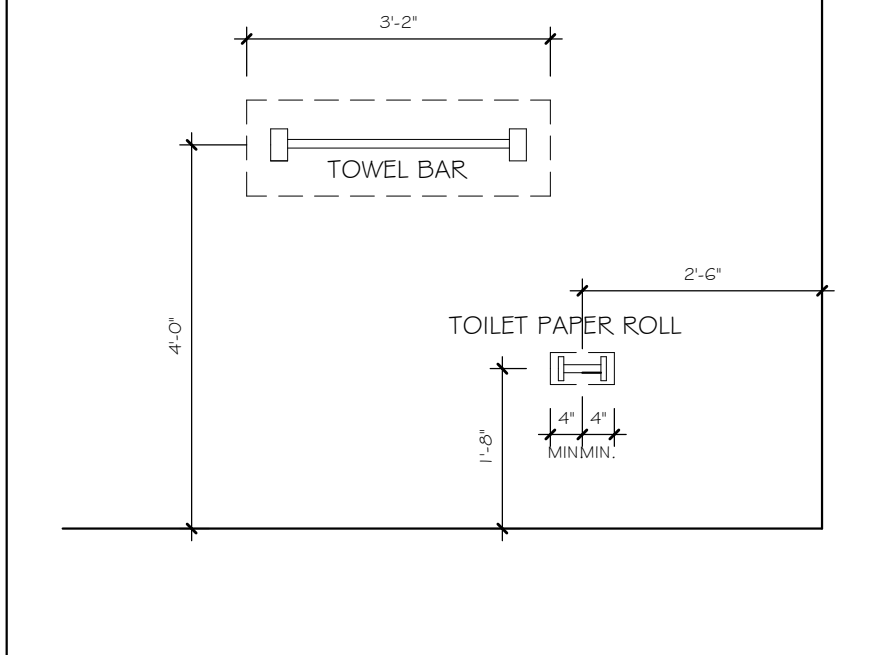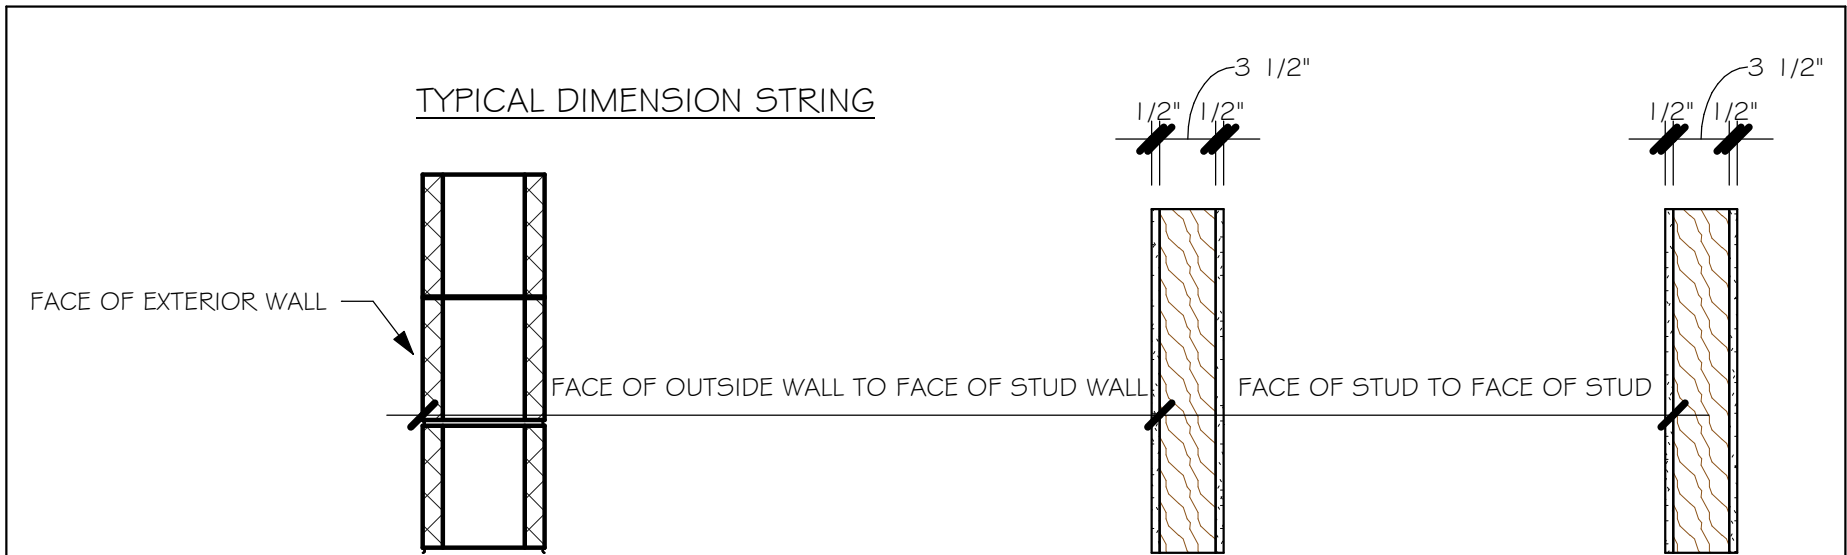

FLOOR PLAN
1/4" = 1'-0"

DESIGN IN ACCORDANCE WITH THE RESIDENTIAL
FLORIDA BUILDING CODE 2020 - 7TH EDITION



Gulf Coast
Drafting & Design, Inc.
EMAIL: PLANS@GULFCOASTDRAFTING.COM
PHONE: 239-540-8822
1515 SE 47th ST. CAPE CORAL, FL 33904

LOT: 9	BLOCK: 283
SUBDIVISION: LEHIGH SPOT LOTS	
ADDRS: 661 LOMOND ST	
D.R.H. #: 579070233	


MODEL	# 1389 B
GCD JOB #	13154

DATE:	07/30/21
DRAWN BY:	JSL
CHECKED BY:	JWC
REVISED:	
PLAN:	FLOOR
SCALE:	As indicated

L:\O-New Data\1 - MASTER 2019\2019-BUILDERS\DK HORTON\2019\5\SUBDIVISIONS\LEHIGH SPOT LOTS\13154 LOT 9 BLK 263 1369 BLUREVIT\13154 1369 BL.rvt

MODEL 1389 B: ATTIC VENTILATION FBCR R806									
COORDINATE VENTING REQUIREMENTS WITH ENERGY CALCULATIONS									
AREAS (SQ. FT.)			SOFFIT ONLY (1/150) (NO ROOF VENTS)			WITH ROOF VENTS (1/300) (R.V.)			
ATTIC VENTILATION REQUIRED			ATTIC VENTILATION REQUIRED			ATTIC VENTILATION REQUIRED			
MARK	ATTIC	SOFFIT	ATTIC AREA/150	REQD AIR FLOW OF SOFFIT	QUAD 4 SOFFIT HAS	ATTIC AREA/300	QUANTITY OF ROOF VENTS	MIN AIR FLOW OF SOFFIT	
1st STORY	2000.0 SQ. FT.	176.0 SQ. FT.	13.33 SQ. FT.	7.57%	8.15%	--- SQ. FT.	-	---%	
			"SOFFIT ONLY" QUALIFIES			ROOF VENTS ARE NOT REQUIRED			
			SOFFIT MODEL			ROOF VENT MODEL			
			ACM QUAD 4, FULL VENT, NARROW PATTERN, 8.15% FREE AIR FLOW			32" BASE 22-3/8" BASE LOMANCO 770-D 0.97 SQ. FT. FREE AIR			

WALL HEIGHT	
<div></div>	= WALL @ 8'-0"

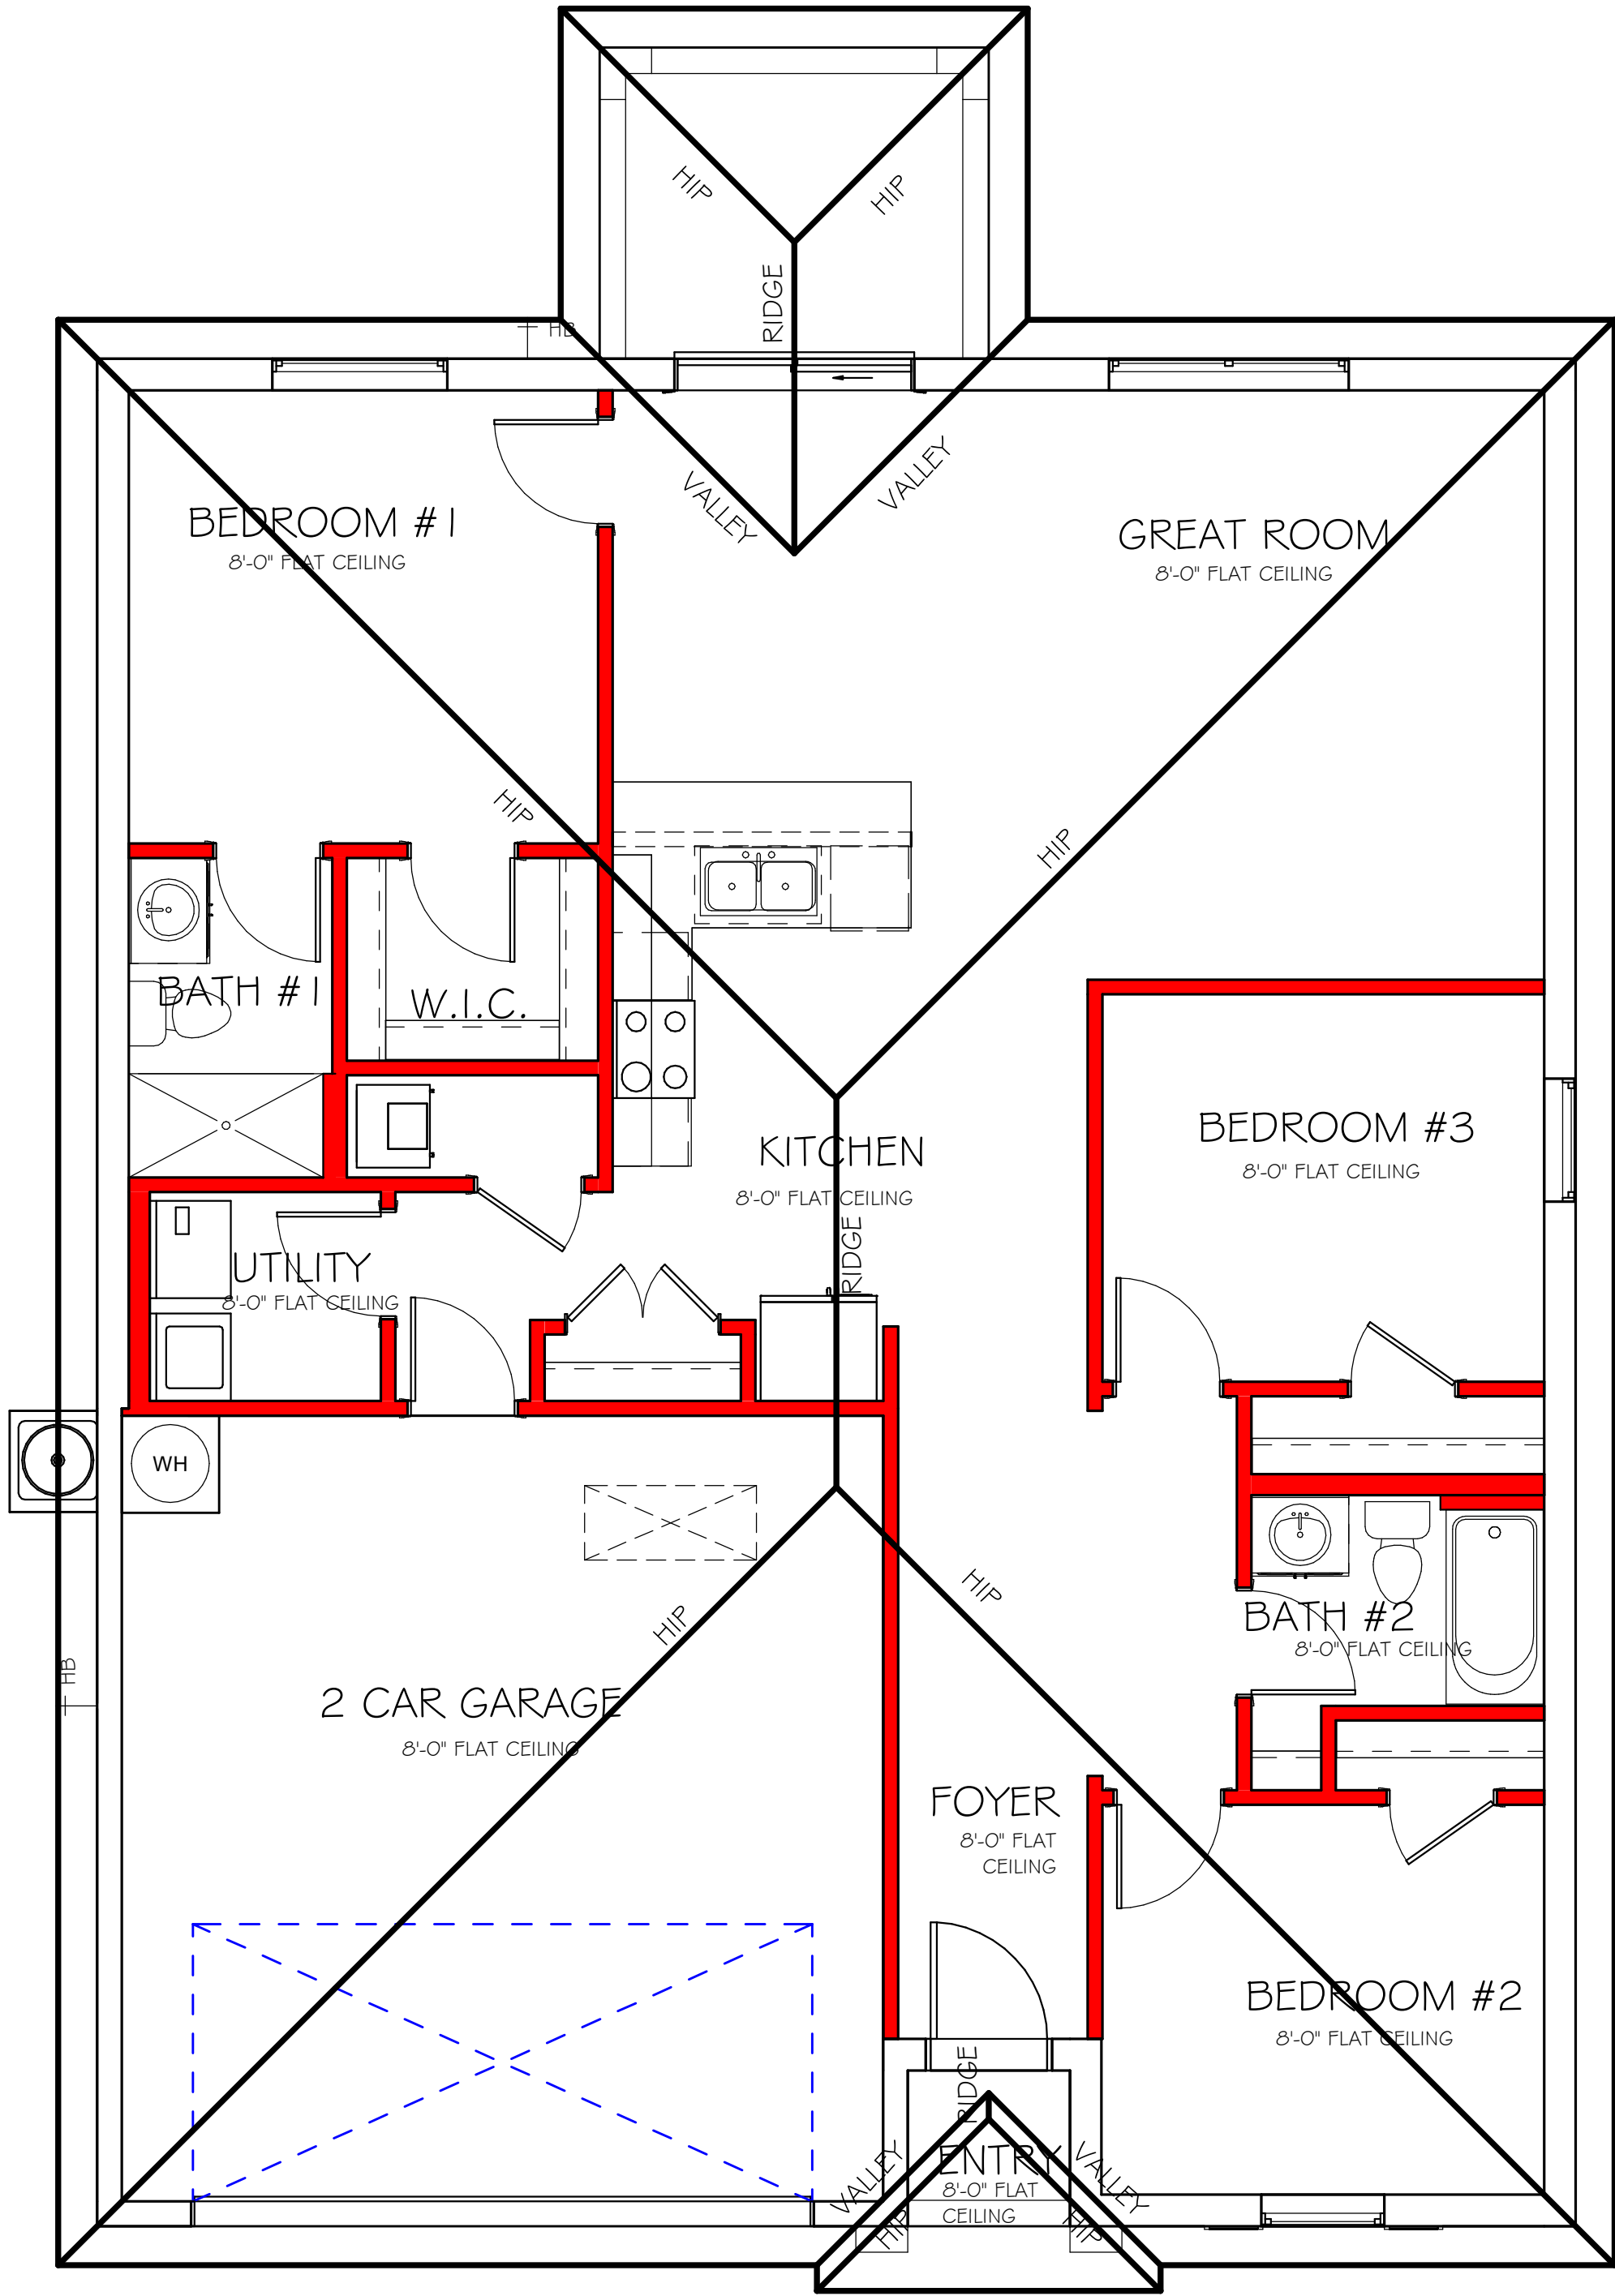

ROOF PLAN
1/4" = 1'-0"

DESIGN IN ACCORDANCE WITH THE RESIDENTIAL
FLORIDA BUILDING CODE 2020 - 7TH EDITION



Gulf Coast
Drafting & Design, Inc.
EMAIL: PLANS@GULFCOASTDRAFTING.COM
PHONE: 239-540-1822
1515 SE 47th ST. CAPE CORAL, FL 33904

LOT: 9	BLOCK: 263
SUBDIVISION: LEHIGH SPOT LOTS	
ADDRS: 661 LOMOND ST	
D.R.H. #: 579070233	

MODEL # 1389 B	GCD JOB # 13154
-------------------	-----------------

DATE:	07/30/21
DRAWN BY:	JSL
CHECKED BY:	JWC
REVISED:	
PLAN:	ROOF
SCALE:	As indicated

L:\O-New Data\1 -MASTER 2019\2019-BUILDERS\DK HORTON 2019\5 SUBDIVISIONS\LEHIGH SPOT LOTS\13154 LOT 9 BLK 263 1389 BLR.v1

ELECTRICAL METER

ELECTRICAL PANEL

120 V JUNCTION BOX

SINGLE RECEPTACLE OUTLET

220 V RECEPTACLE OUTLET

4-PLEX RECEPTACLE OUTLET

DUPLEX RECEPTACLE OUTLET

1/2 SWITCHED DUPLEX OUTLET

DUPLEX RECEPTACLE AT ELEV. A.F.F.

DUPLEX RECEPTACLE - ABOVE COUNTER

SINGLE POLE SWITCH

3 WAY SWITCH

DIMMER SWITCH

MOTION SENSOR SWITCH

AG/DC SMOKE DETECTOR TO BE INTERCONNECTED ANY RESIDENT HAVING A FOSSIL-BURNING HEATER OR APPLIANCE, A FIREPLACE, OR AN ATTACHED GARAGE SHALL HAVE AN OPERATIONAL CARBON MONOXIDE ALARM INSTALLED WITHIN 10 FEET OF EACH ROOM USED FOR SLEEPING PERPOSES. PER RULE 9B-3.04.72 SD (SMOKE DETECTOR) SCD (CARBON MONOXIDE/ SMOKE DETECTOR)

TELEPHONE OUTLET

TELEVISION RECEPTION OUTLET

SURFACE MOUNTED CEILING LIGHT

FLUSH MOUNTED LIGHT

WALL MTD. BRACKET LIGHT

DUPLEX FLOOD LIGHT

EXHAUST FAN

TRACK MTD. LIGHTS

A/C DISCONNECT

PUSH BUTTON (PB) / DOOR BELL (DB)

INTERCOM

KEYPAD



4' FLUORESCENT LIGHT

2' UNDER COUNTER LIGHT

NOTE: NOT ALL SYMBOLS ARE USED FOR THIS PROJECT.

ELECTRICAL NOTES:
ARC-FAULT CIRCUIT-INTERRUPTERS AND TAMPER RESISTANT RECEPTACLES SHALL BE INSTALLED IN DWELLING UNITS PER N.E.C 210.12 AND 406.11
ALL ELECTRIC, ELECTRICAL EQUIPMENT AND APPLIANCES TO BE SET AT OR ABOVE BASE FLOOD ELEVATION PLUS 1'-0" FREEBOARD.
ALL OUTLETS IN WET AREAS AND ALL EXTERIOR OUTLETS TO BE GFI'S.
INSTALL PHONE AND T.V PER CONTRACT.
INSTALL ALL ELECTRICAL PER NEC 2017

ELECTRICAL PLAN 1389		
200 AMP SERVICE		
TAG	QUANTITY	PRODUCT
A	(X)	(FLUSH MOUNTED LT)
B	(X)	(VAPORS)
C	(X)	(PENDANT LIGHT
D	(10)	(10" MUSHROOMS)
E	(2)	(24" 3 LT)
F	(X)	(36" 4 LT)
G	(X)	(NOT USED)
H	(2)	(COACH LIGHTS)
I	(X)	(COACH LIGHTS)
J	(X)	(J BOX)
K	(1)	(4' FLUORESCENT)
L	(X)	(2' FLUORESCENT)
M	(X)	(5LT CHANDELIER)
N	(X)	(3 LT)
O	(X)	(PENDANT/ NOOK)
P	(X)	(X)
Q	(X)	(X)

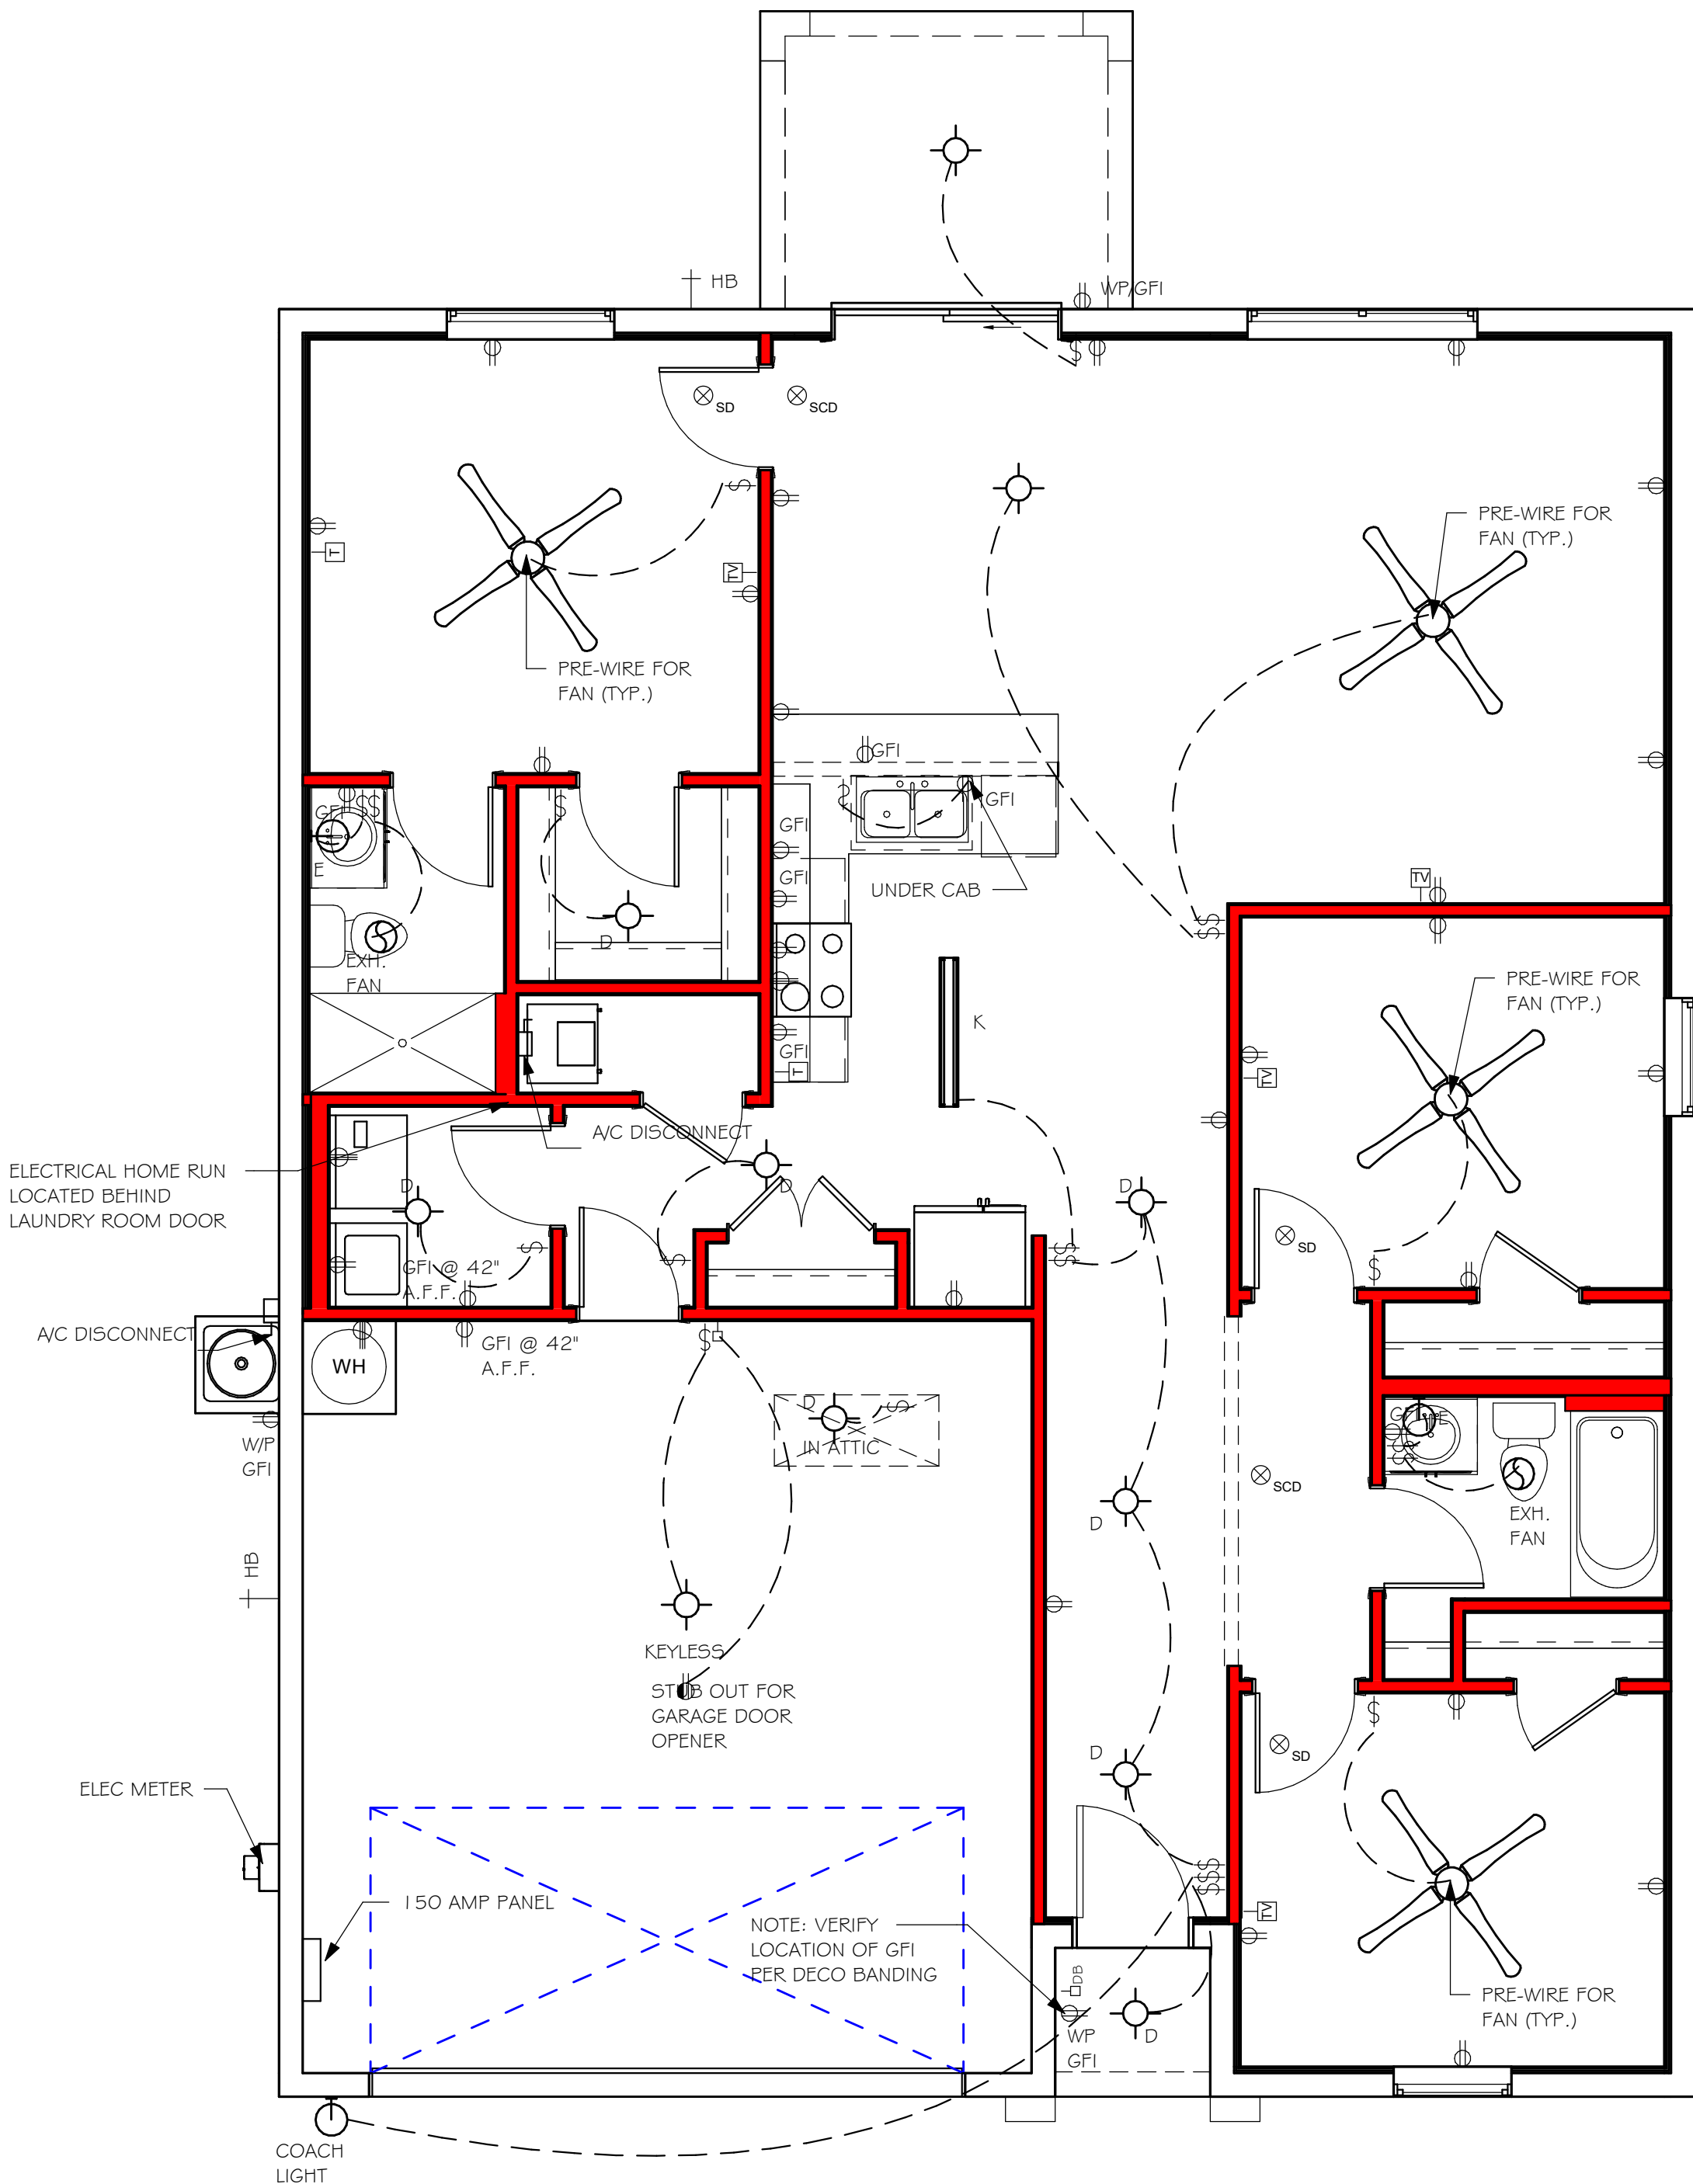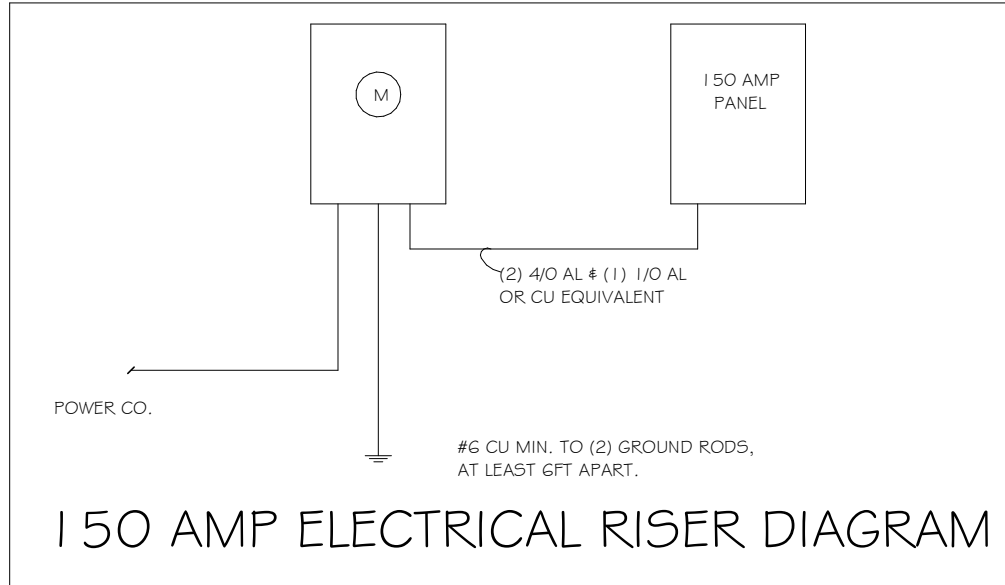

DESIGN IN ACCORDANCE WITH THE RESIDENTIAL FLORIDA BUILDING CODE 2020 - 7TH EDITION

Express

HOMES

Gulf Coast

Drafting & Design, Inc.

EMAIL: PLANS@GULFCOASTDRAFTING.COM

PHONE: 239-540-1822

1515 SE 47th ST. CAPE CORAL, FL 33904

LOT: 9

BLOCK: 283

SUBDIVISION: LEHIGH SPOT LOTS

ADDRES: 661 LOMOND ST

D.R.H. #: 579070233

MODEL

1389 B

GCD JOB # 13154

DATE: 07/30/21

DRAWN BY: JSL

CHECKED BY: JWC


REVISED:

PLAN: ELECTRIC


SCALE: As indicated

A-5


L:\O-New Data\1 - MASTER 2019\2019-BUILDERS\DK HORTON 2019\5SUBDIVISIONS\LEHIGH SPOT LOTS\13154 LOT 9 BLK 263 1369 BLUEVIL\13154 1369 BLK.rvt

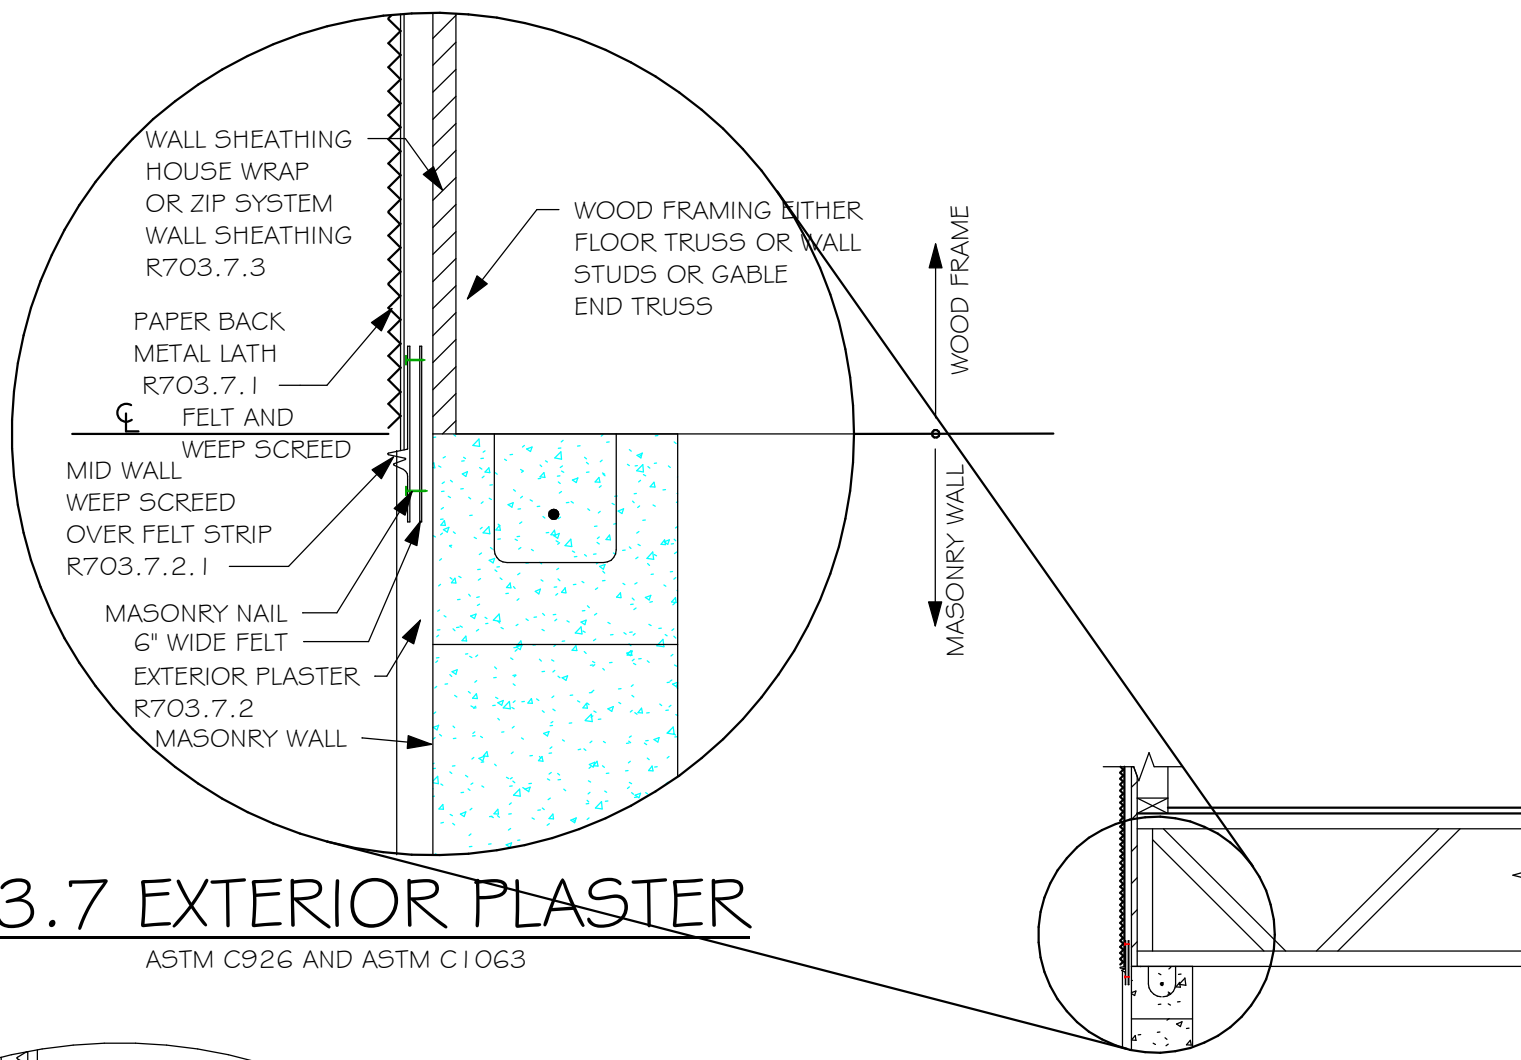

R703.7 EXTERIOR PLASTER
ASTM C926 AND ASTM C1063

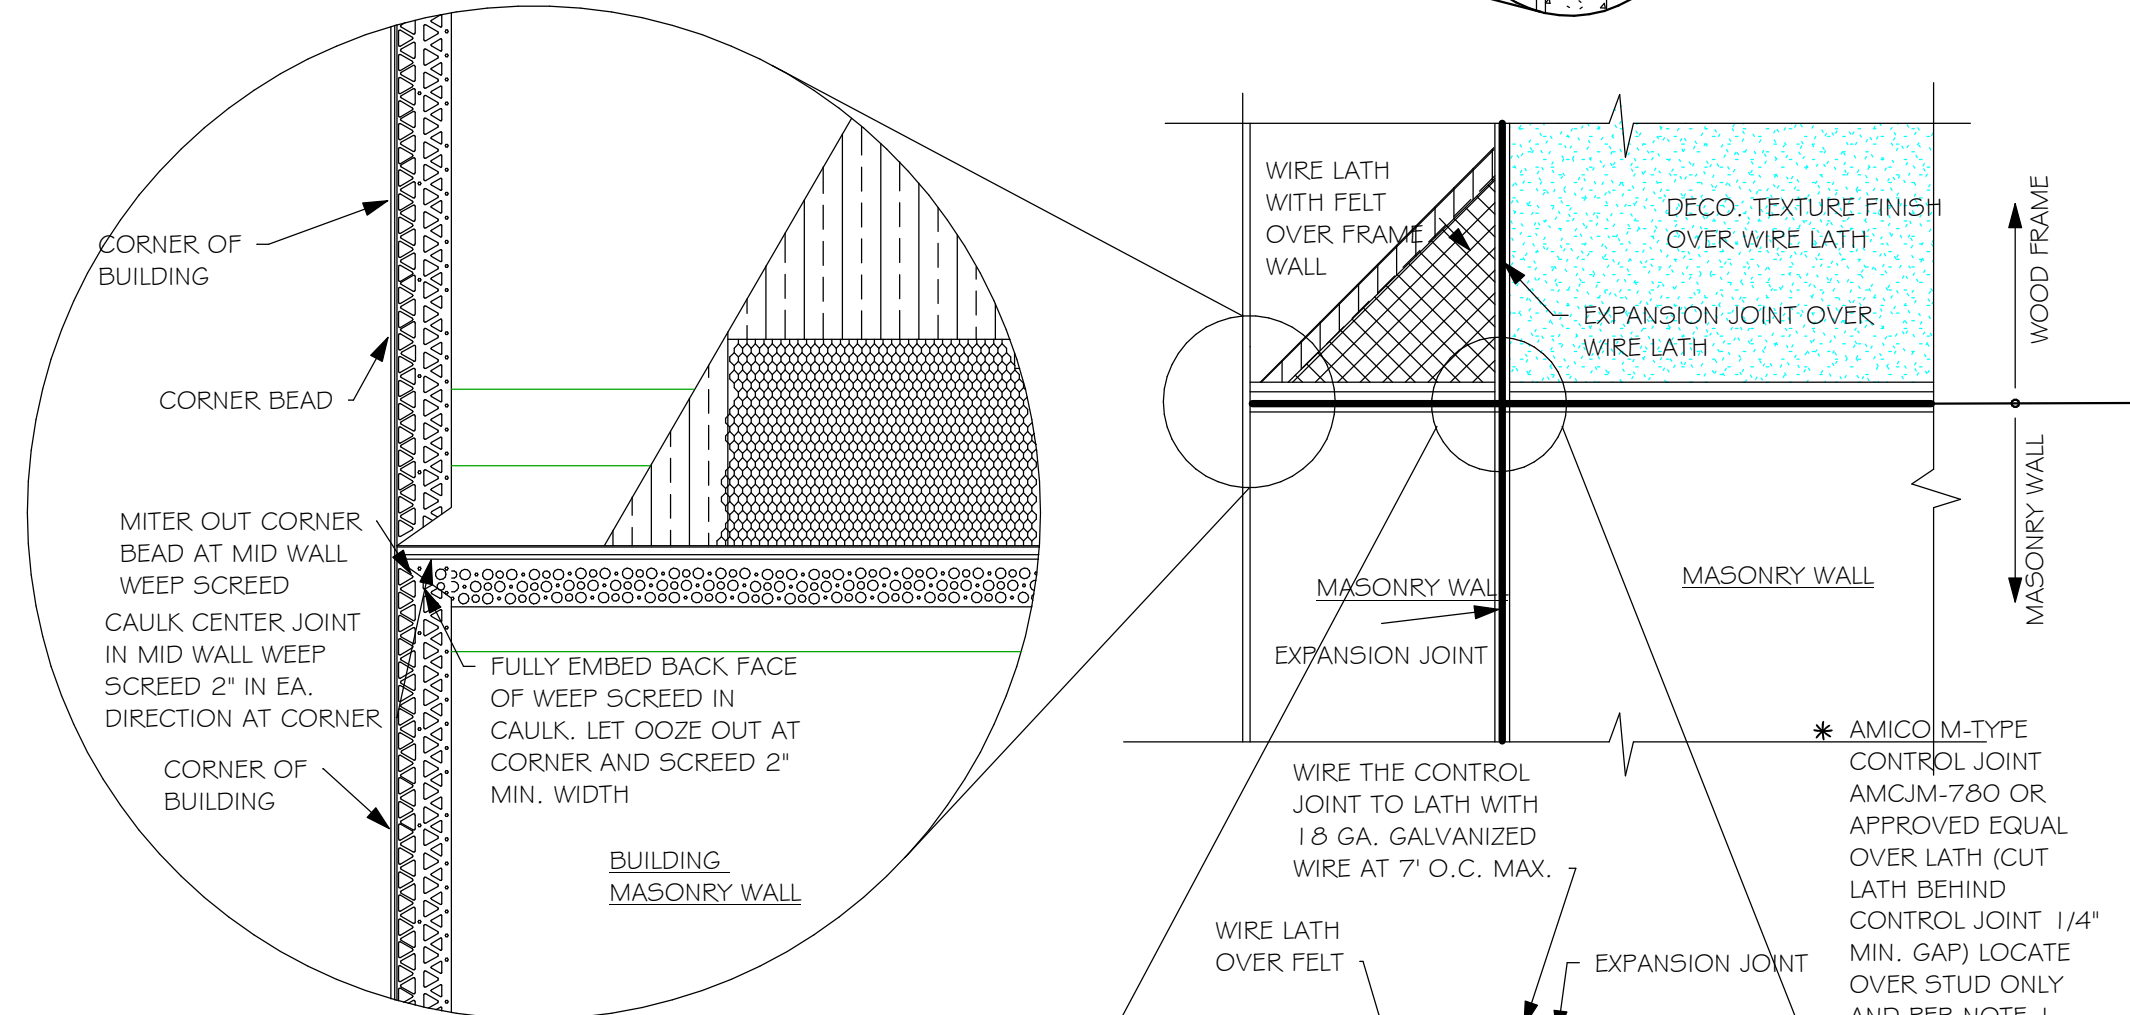

MID WALL WEEP SCREED DETAIL

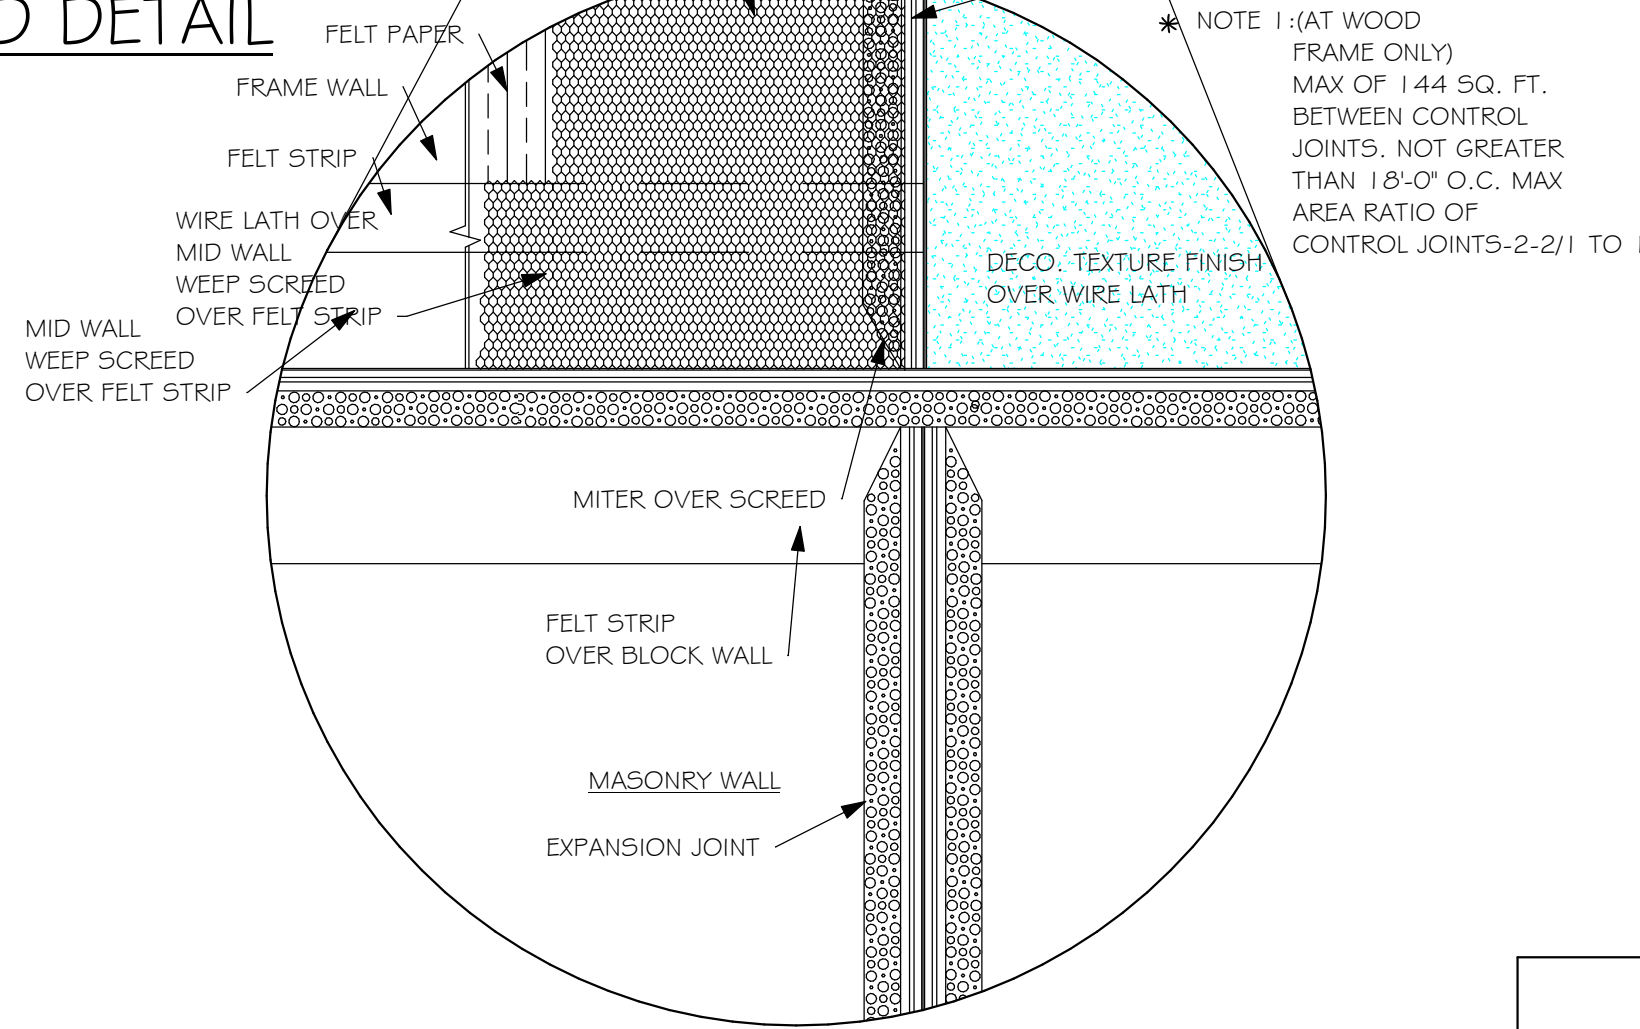

WEEP SCREED DETAIL
INSTALL AT ALL EXTERIOR WALL LOCATIONS WHERE WOOD STUD FRAMING IS ABOVE MASONRY WALLS.

RESIDENTIAL SPECIFICATIONS

GENERAL NOTES

1. THE CONTRACTOR SHALL VERIFY ALL CONDITIONS AND DIMENSIONS AT THE JOB SITE PRIOR TO COMMENCING WORK. THE CONTRACTOR SHALL REPORT ALL DISCREPANCIES BETWEEN THE DRAWINGS AND EXISTING CONDITIONS TO THE DESIGNER PRIOR TO COMMENCING WORK.
2. THE CONTRACTOR SHALL SUPPLY, LOCATE AND BUILD INTO THE WORK ALL INSERTS, ANCHORS, ANGLES, PLATES, OPENINGS, SLEEVES, HANGERS, SLAB DEPRESSIONS AND PITCHES AS MAY BE REQUIRED TO ATTACH AND ACCOMMODATE OTHER WORK.
3. ALL DETAILS AND SECTIONS SHOWN ON THE DRAWINGS ARE INTENDED TO BE TYPICAL AND SHALL BE CONSTRUCTED TO APPLY TO ANY SIMILAR SITUATION ELSEWHERE IN THE WORK EXCEPT WHERE A DIFFERENT DETAIL IS SHOWN.
4. FOR REQUIRED SOIL BEARING, SEE STRUCTURAL. THE CONTRACTOR SHALL REPORT ANY DIFFERING CONDITIONS TO THE DESIGNER PRIOR TO COMMENCING WORK.
5. STRUCTURAL DRAWINGS SHALL BE USED IN CONJUNCTION WITH JOB SPECIFICATION AND HOUSE PLANS, MECHANICAL, ELECTRICAL, PLUMBING, AND SITE DRAWINGS, CONSULT THESE DRAWINGS FOR SLEEVES, DEPRESSIONS AND OTHER DETAILS NOT SHOWN ON STRUCTURAL DRAWINGS.
6. ALL SPECIFIED FASTENERS MAY ONLY BE SUBSTITUTED IF APPROVED BY THE ENGINEER IN WRITING. THE INSTALLATION OF THE FASTENERS SHALL BE IN ACCORDANCE WITH THE MANUFACTURERS SPECIFICATIONS. SIMPSON FASTENERS SPECIFIED MAY BE SUBSTITUTED WITH THE SAME QUANTITY AND EQUIVALENT STRENGTH PRODUCT. ALL BOLTS, NUTS, WASHERS, STRAPS AND FASTENERS INCLUDING NAILS, SHALL BE HOT MOPED DIPPED GALVANIZED OR STAINLESS STEEL CONTINUOUS ANCHORAGE SHALL BE PROVIDED BETWEEN ALL TRUSSES, WALL SECTIONS, BEAMS, POSTS AND FOOTINGS WITH USE OF STRAPS AND CONNECTORS AS SPECIFIED HEREIN.
7. TREATED WOOD REQUIREMENTS:- ALL TREATED WOOD EXPOSED TO WEATHER SHALL BE PROTECTED, PRESSURE TREATED, OR NATURALLY RESISTANT TO DECAY. ALL WOOD TOUCHING MASONRY OR CONCRETE SHALL BE ISOLATED, OR PRESSURE TREATED.
8. THE STRUCTURE IS DESIGNED TO BE SELF SUPPORTING AND STABLE AFTER THE BUILDING IS COMPLETE. IT IS THE CONTRACTORS SOLE RESPONSIBILITY TO DETERMINE ERECTION PROCEDURES AND SEQUENCES TO ENSURE SAFETY OF THE BUILDING AND ITS COMPONENTS DURING ERECTION. THIS INCLUDES THE NECESSARY SHORING, SHEETING, TEMPORARY BRACING, GUYS, OR TIE DOWNS.
9. CEILING DRYWALL INSTALLED WITHIN THE HOUSE TO TRUSSES SPACED 24" O.C. SHALL BE 5/8" DRYWALL OR 1/2" SAG INSTALLED PER SEC. 702.3.5
10. LANAI CEILINGS * COVERED ENTRY CEILINGS 1X4 STRIPPING @ 16" O.C. FASTENED WITH 2-8d NAILS TO EACH TRUSS. 5/8" EXTERIOR GYP. BOARD CEILING FASTENED WITH 8d NAILS OR 1-5/8" DRYWALL SCREWS @ 6" O.C. EDGE AND FIELD.


DOOR AND WINDOW ANCHORAGE

ANCHORAGE REQUIREMENTS- ALL PASS AND SLIDING GLASS DOORS AND ALL WINDOW ASSEMBLIES SHALL BE ANCHORED TO THE MAIN WIND FORCE RESISTING SYSTEM IN A MANNER SPECIFIED BY THE PUBLISHED MANUFACTURERS LITERATURE. THERE SHALL BE NO SUBSTITUTION OF ALTERNATE FASTENINGS UNLESS PROVIDED BY THE MANUFACTURER AND APPROVED BY THE BUILDING DESIGN ENGINEER.

MASONRY OPENING
WHERE WINDOW FRAME IS DESIGN TO FASTEN WITH SCREWS THROUGH THE FRAME AND INTO THE MSAIORY, THE BUCK MATERIAL IS SIMPLY A SPACER, THE BUCK MAY BE FASTENED WITH THE T NAILS OR ANY SUITABLE FASTENER TO TACK IT INTO POSITION PRIOR TO WINDOW INSTALLATION. FASTEN WINDOW FRAME PER MFR INSTRUCTIONS. A WINDOW FASTENER SHALL PENETRATE MASONRY BY 2 1/4" MIN.

WHERE WINDOW FRAME IS DESIGNED TO FASTEN ONLY TO THE WOOD BUCK (IE, FLANGED FRAME WITH WOOD SCREWS) THE BUCKS SHALL BE 2X WOOD WITH STRUCTURAL FASTENING TO THE MASONRY WITH 1/4 X 3 3/4 MASONRY SCREWS @ 24" OC AND 6" FROM EACH END.

WOOD FRAMED OPENING- ALL DOORS AND WINDOWS SHALL BE INSTALLED ACCORDING TO THE PUBLISHED MANUFACTURERS LITERATURE OF THE ASSEMBLY BEING INSTALLED TO THE ROUGH SUBSTRATE OPENING. SHIMS SHALL BE MADE OF MATERIALS CAPABLE OF RESISTING THE APPLIED LOADS AND SHALL BE LOCATED NEAR EACH FRAME FASTENER TO MINIMIZE DISTORTION OF THE FRAME AS THE FASTENERS ARE TIGHTENED .

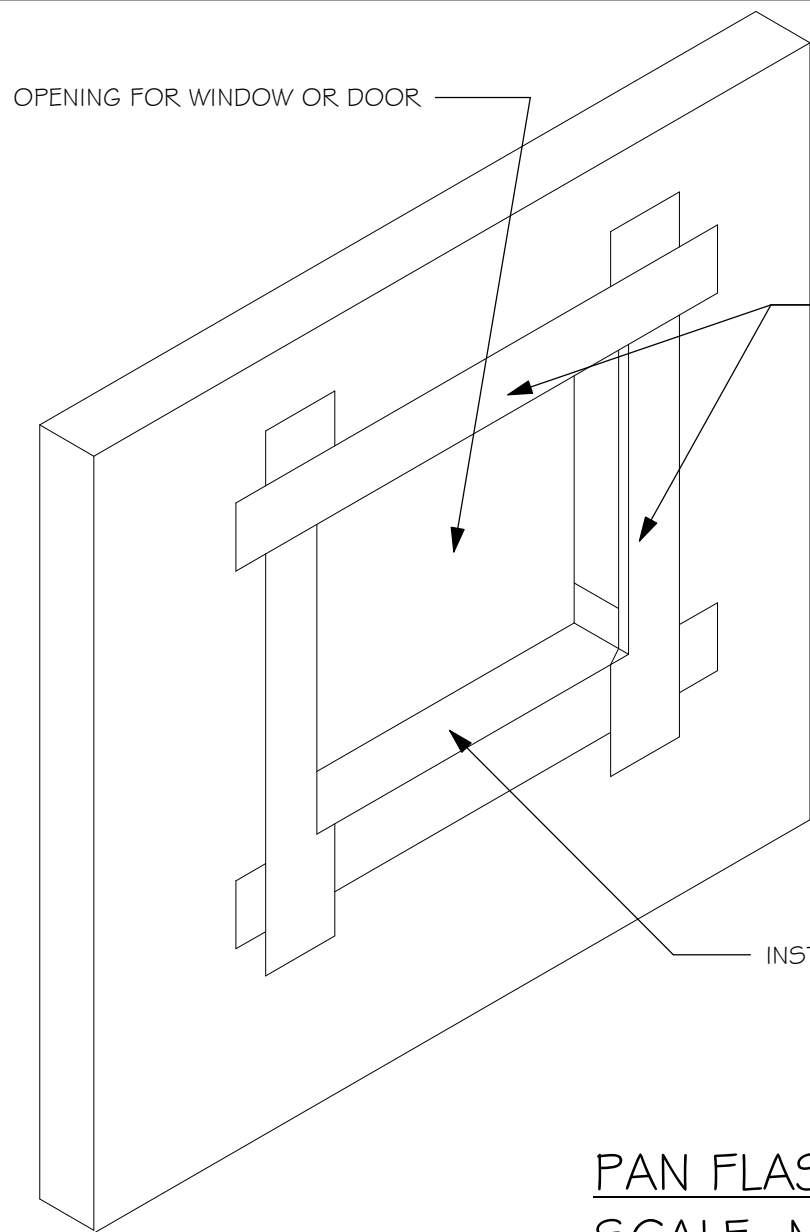

PAN FLASHING PER R703.4
SCALE: N.T.S.

GENERAL ROOF ASSEMBLY

ROOF SHEATHING PER TABLE R803.2.2 SHALL BE 19/32 APA RATED SHEATHING, EXPOSURE 1, SPAN RATING 40/20 OR BETTER. INSTALL PANELS WITH LONG DIMENSION PLACED PERPENDICULAR TO TRUSSES. A 1/8" SPACE BETWEEN ADJACENT SHEETS SHALL BE MAINTAINED . INSTALL "H" CLIPS AT UNSUPPORTED PANEL EDGES. FOR FASTENING, SEE STRUCTURAL.

FLASHING

FLASHING SHALL BE ALUMINUM, ALUMINUM ZINC COATED STEEL 0.0179" THICK, 26 GAUGE A250 ALUM ZINC, OR GALVANIZED STEEL 0.0179" THICK, 26 GAUGE ZINC COATED G90. FLASHING SHALL BE INSTALLED IN ACCORDANCE WITH THE ZIP SYSTEM ROOF SHEATHING MANUFACTURES PUBLISHED REQUIREMENTS. ALL FLASHING AND INSTALLATION SHALL CONFORM TO SECTION R905.2.8 (1 TO 5).

DRIP EDGE

DRIP EDGE SHALL BE PROVIDED AT ALL EAVES AND GABLES OF SHINGLES ROOFS, LAPPED A MINIMUM OF 3" @ JOINTS. THE OUTSIDE EDGE SHALL EXTEND A MINIMUM OF 1/2" BELOW SHEATHING AND THE INSIDE EDGE SHALL EXTEND BACK A MINIMUM OF 2". DRIP EDGE SHALL BE FASTENED AT NO MORE THAN 4" CENTERS. THERE SHALL BE A MINIMUM OF 4" WIDTH OF ROOF CEMENT INSTALLED OVER THE DRIP EDGE FLANGE.

ASPHALT SHINGLE ROOF SPECS

SHINGLES

30# FELT SHALL BE INSTALLED UNDER ASPHALT SHINGLES. ALL ASPHALT SHINGLES SHALL HAVE SELF-SEALING STRIPS OR BE INTERLOCKING AND COMPLY WITH ASTM D 225 OR D 3462, FOR FASTENING, SEE STRUCTURAL. INSTALLATION SHALL COMPLY WITH MANUFACTURES REQUIREMENTS FOR INSTALLATION IN THE GIVEN FLORIDA WIND ZONE, AS DETERMINED BY ASTM D 3161 .

ROOF SHEATHING PER SCHEDULE 2/5-3.
AND PER NOTES IN TABLE 3 ON A-6


SHINGLE ROOF PER NOTE 4 ON A-6

WOOD TRUSSES @ 24" O.C. (TYPICAL.)
DESIGNED BY DELEGATED TRUSS ENGINEER.
EMBEDDED STRAP AT EACH TRUSS SEE STRUCTURAL.
FLASHING AND DRIP EDGE PER NOTES IN TABLE 2 ON A-6
2X6 MIN. SUB FASCIA
PROVIDE VENTILATION PER R806.1
ALUMINIUM VENTED SOFFIT SHALL MEET R704 SEE TABLE 3 ON 5-3
SEE ENERGY CODE FORMS FOR INSULATION R-VALUES
DRYWALL CEILING PER NOTE 9 IN TABLE 1 ON A-6
1X4 P.T. STRIP
PRECAST LINTEL, SEE STRUCTURAL.
WINDOW BUCKS, SEE STRUCTURAL.
WINDOW, SEE SCHEDULE AND PLAN
PROVIDE TERMITE TREATMENT WITH "BORA CARE".
SILL SET IN MORTAR
1/2" DRYWALL W/ TEXTURED WALLS
1X2 P.T. FURRING STRIPS @ 24" O.C. W/ INSULATION (MIN. R4.1)
WOOD BASE
CONC. FOOTING SEE STRUCTURAL PLAN FOR SIZE AND REINFORCING.

BOND BEAM AND LINTEL, SEE STRUCTURAL.
SLOPE TO EXTERIOR
PRECAST CONCRETE SILL
DECO. CEMENT FINISH PER ASTM C-926
8" MASONRY WALL, SEE STRUCTURAL.

CONC. FOOTING SEE STRUCTURAL PLAN FOR SIZE AND REINFORCING.

TYPICAL WALL SECTION

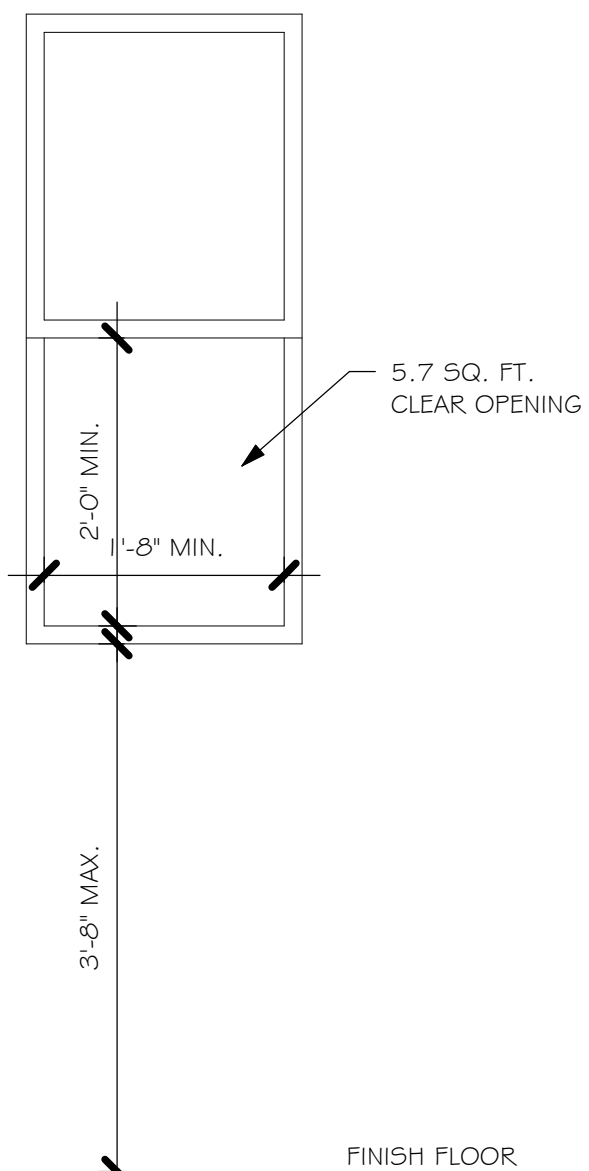

R310.2.1 MINIMUM OPENING AREA- ALL EMERGENCY ESCAPE AND RESCUE OPENINGS SHALL HAVE A MINIMUM NET CLEAR OPENING OF 5.7 SQUARE FEET (0.530 m²).

EXCEPTION- GRADE FLOOR OPENINGS SHALL HAVE A MINIMUM NET CLEAR OPENING OF 5.5 SQUARE FEET (0.465 m²).

R310.2.1 MINIMUM OPENING HEIGHT- THE MINIMUM NET CLEAR OPENING HEIGHT SHALL BE 24 INCHES (610mm).

R310.2.1 MINIMUM OPENING WIDTH- THE MINIMUM NET CLEAR OPENING WIDTH SHALL BE 20 INCHES (508mm).

R310.1.1 OPERATIONAL CONSTRAINTS- EMERGENCY ESCAPE AND RESCUE OPENINGS SHALL BE OPERATIONAL FROM THE INSIDE OF THE ROOM WITHOUT THE USE OF KEYS OR TOOLS.

R310.2.3 WINDOW WELLS- THE MINIMUM HORIZONTAL AREA OF THE WINDOW WELL SHALL BE 9 SQUARE FEET (0.84 m²), WITH A MINIMUM HORIZONTAL PROJECTION AND WIDTH OF 36 INCHES (914mm). THE AREA OF THE WINDOW WELL SHALL ALLOW THE EMERGENCY ESCAPE AND RESCUE OPENING TO BE FULLY OPENED.

MINIMUM EGRESS WINDOW DETAIL

DESIGN IN ACCORDANCE WITH THE RESIDENTIAL
FLORIDA BUILDING CODE 2020 - 7TH EDITION

Express
HOMES

Gulf Coast
Drafting & Design, Inc.

EMAIL: PLANS@GULFCOASTDRAFTING.COM
PHONE: 239-540-8223
1515 SE 47th ST. CAPE CORAL, FL 33904

LOT: 9
SUBDIVISION: LEHIGH SPOT LOTS
ADDRESS: 661 LOWMOON ST
D.R.H. #: 579070233

MODEL
1389 B

GCD JOB # 13154

DATE: 07/30/21

DRAWN BY: JSL

CHECKED BY: JWC


REVISED:

PLAN: SECTIONS


SCALE: As indicated

A-6


L:\O-New Data\1-MASTER 2019\2019-BUILDERS\DK HORTON 2019\5SUBDIVISIONS\LEHIGH SPOT LOTS\13154 LOT 9 BLK 263 1369 BLUREV\13154 1369 BL.rvt

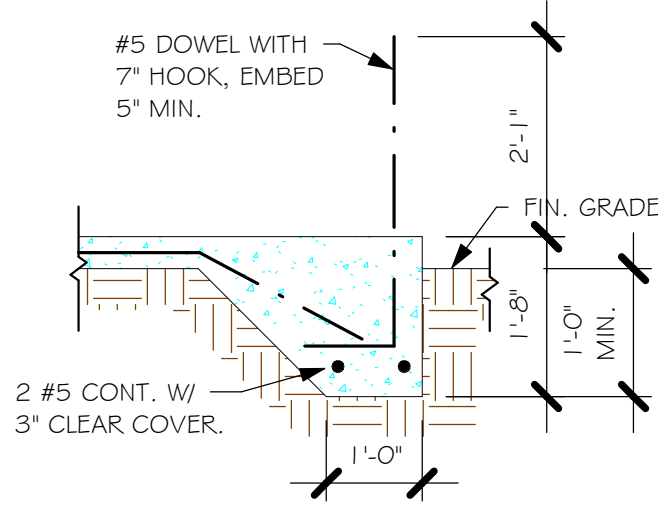


"F3" FOOTING
1/2" = 1'-0"

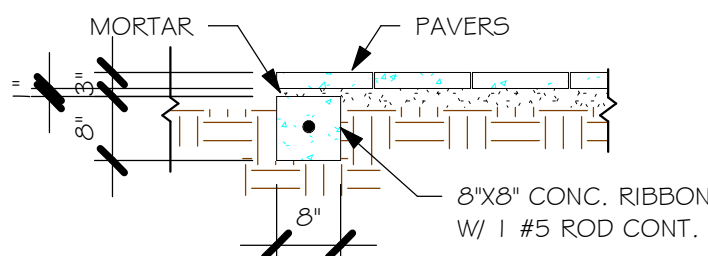


"P" PAVERS DETAIL ENTRY/ LANAI
1/2" = 1'-0"

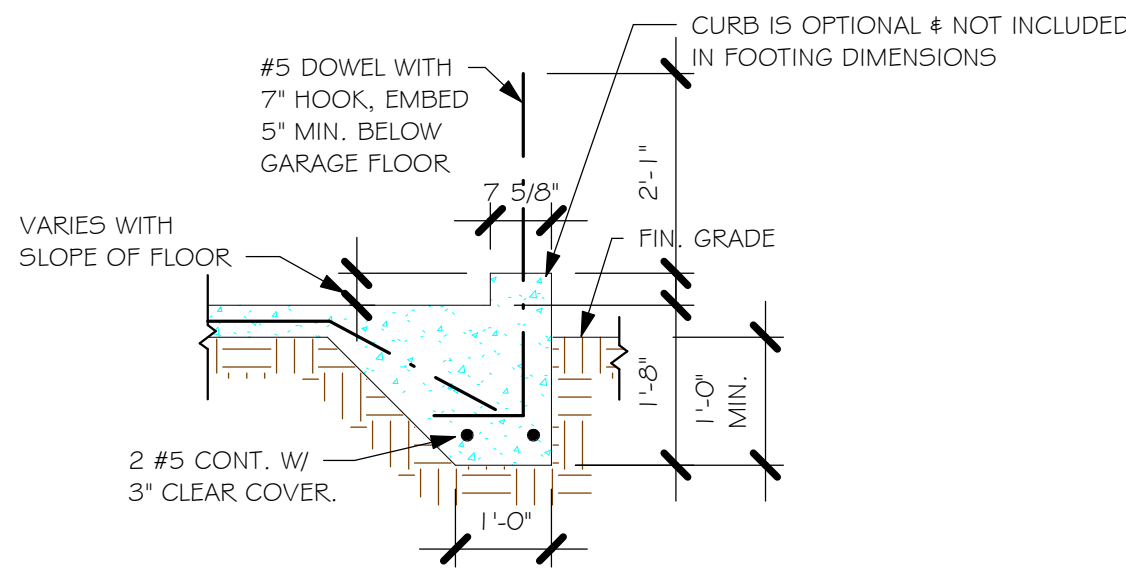

"F3" WITH CURB AT GARAGE
1/2" = 1'-0"

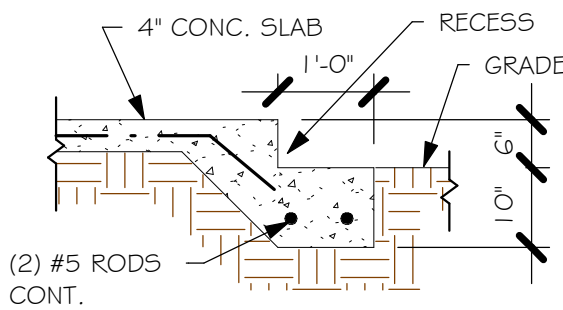

GARAGE DOOR RECESS
1/2" = 1'-0"

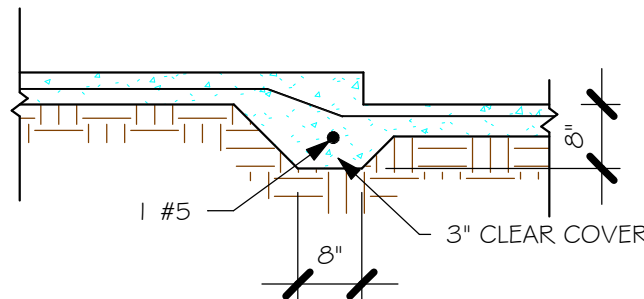

"FGA" STEP DOWN
1/2" = 1'-0"

PAD FOOTING SCHEDULE

USED	TYPE	LENGTH	WIDTH	DEPTH	BOTTOM REINF.		REMARKS
					LONG WAY	SHORT WAY	
X	A	2'-6"	2'-6"	1'-0"	3-#5	3-#5	-
	B	3'-0"	3'-0"	1'-0"	4-#5	4-#5	-
	C	3'-6"	3'-6"	1'-0"	4-#5	4-#5	-
	D	4'-0"	4'-0"	1'-2"	5-#5	5-#5	-
	E	5'-0"	5'-0"	1'-2"	6-#5	6-#5	-

WALL FOOTING SCHEDULE

USED	TYPE	LENGTH	WIDTH	DEPTH	BOTTOM REINFORCING	SHAPE
	F1	CONT.	1'-4"	0'-8"	2-#5	
	F2	CONT.	1'-8"	0'-10"	2-#5	
X	F3	CONT.	1'-0"	1'-8"	2-#5	
	F4	CONT.	1'-4"	1'-8"	2-#5	
	F5	CONT.	1'-4"	1'-0"	2-#5	
	F6	CONT.	1'-4"	1'-0"	2-#5	
X	F6A	CONT.	0'-8"	0'-8"	1-#5	
	TE	CONT.	0'-8"	0'-8"	1-#5	

ADD CURB TO GARAGE, SEE DETAIL


PROVIDE CORNER BARS PER 6/5-3

FOUNDATION PLAN

SCALE: 1/4" = 1'-0"


PLAN NOTES:

1. TOP OF GROUND FLOOR SLAB DATUM ELEVATION 0'-0"
2. "F#" DENOTES CONTINUOUS WALL FOOTING TYPE PER SCHEDULE THIS SHEET.
3. PROVIDE #5 VERTICAL REINFORCING AT DOT LOCATIONS SHOWN ON PLAN FROM FOOTING TO BOND BEAM.
4. ALL DIMENSIONS ARE TO OUTSIDE FACE OF MASONRY WALLS. SOME SLAB EDGES MAY EXTEND BEYOND FACE OF WALL.
5. FOR DIMENSIONS OF ROUGH OPENINGS IN MASONRY WALLS, COORDINATE WITH WINDOW/DOOR SUPPLIER.
6. PROVIDE PRESSURE TREATED BUCKS AT WINDOWS/ DOORS PER DETAIL 7/5-3.

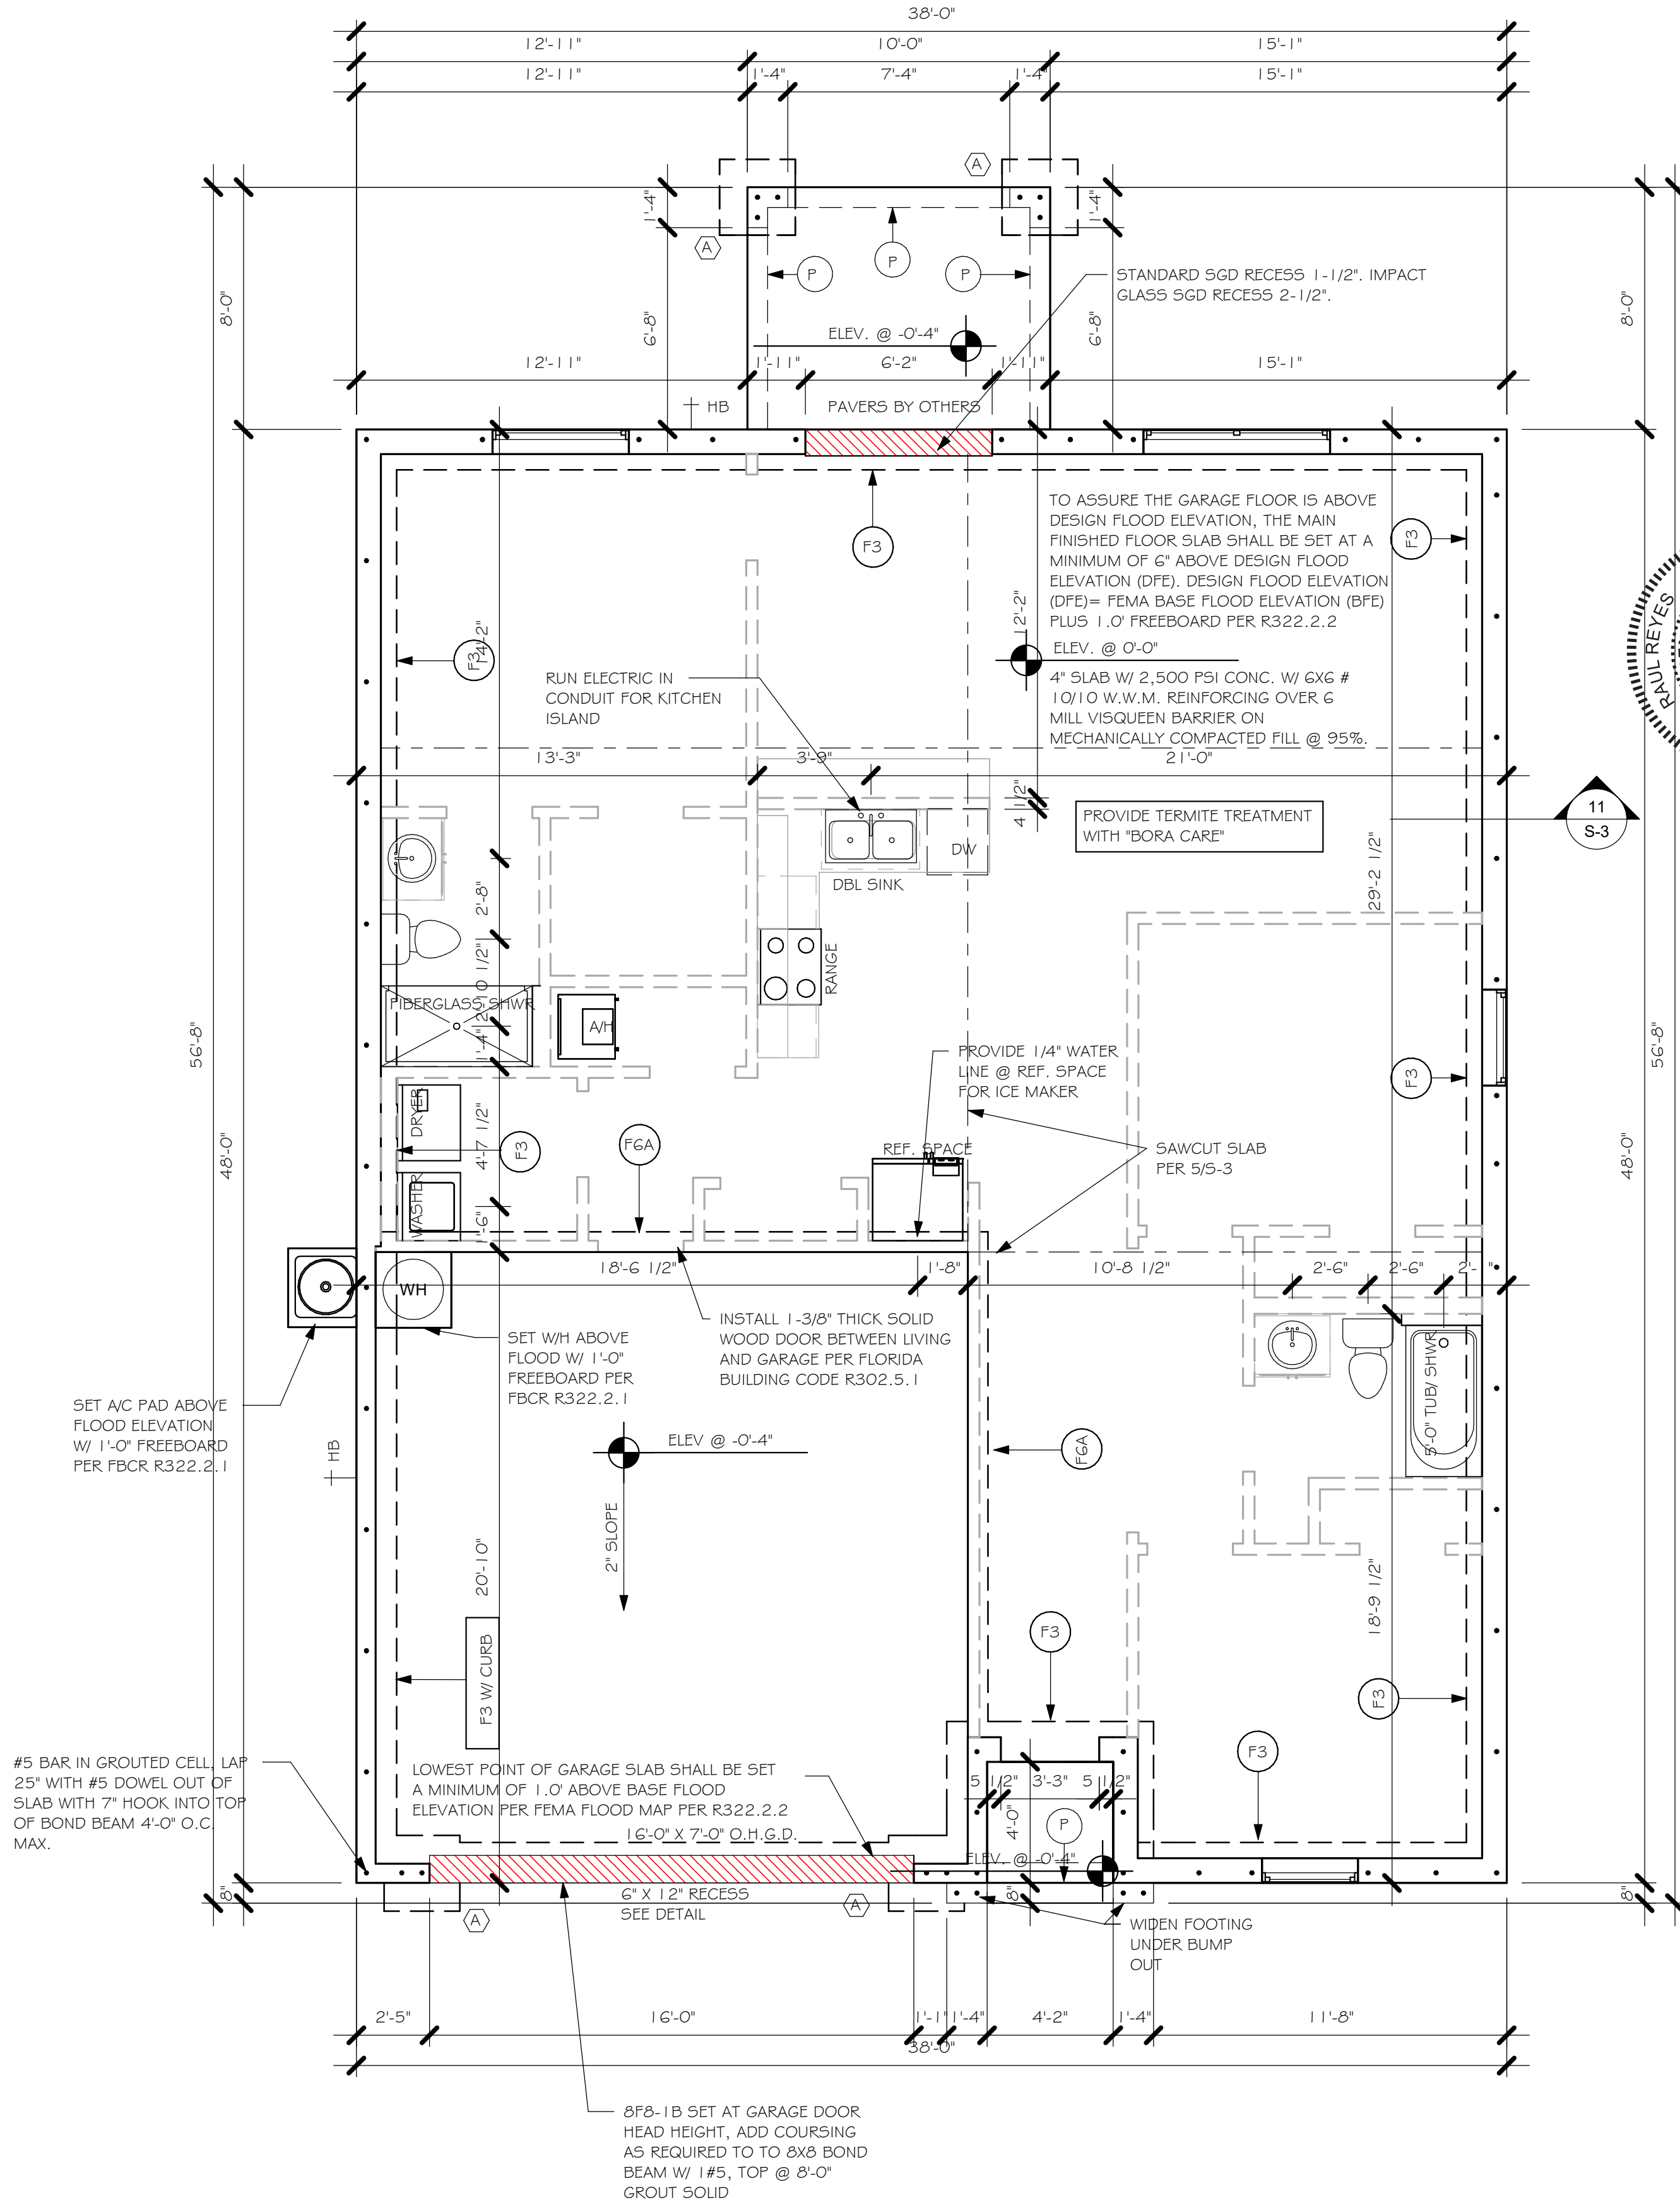

FOUNDATION
1/4" = 1'-0"

DESIGN IN ACCORDANCE WITH THE RESIDENTIAL
FLORIDA BUILDING CODE 2020 - 7TH EDITION

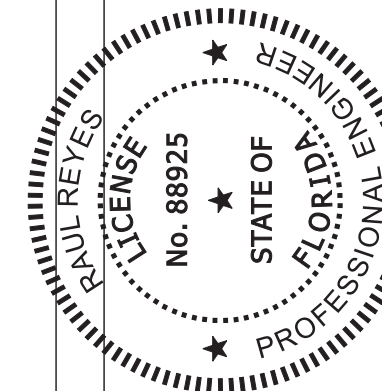

This item has been digitally signed by Raul Reyes on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be validated on any electronic copies.

EMAIL: PLANS@GULFCOASTDRAFTING.COM
PHONE: 239-540-1822
1515 SE 47th ST. CAPE CORAL, FL 33904

STRUCTURAL
SYSTEMS
OF NORTH FLORIDA
CAPE CORAL, FL 33904
(239) 549-4254
CIVIL 889

LOT: 9
SUBDIVISION: LEHIGH SPOT LOTS
ADDRESS: 661 LOMOND ST
D.R.H. #: 579070233

MODEL
1389 B
GCD JOB # 13154

DATE: 07/30/21
DRAWN BY: JSL
CHECKED BY: JWC
REVISED:
PLAN: FOUNDATION PLAN
SCALE: As indicated

S-1

NOTES:

1. PROVIDE A STRAP FROM THE ABOVE LIST AT EACH ROOF TRUSS BEARING POINT, BASED ON THE TRUSS UPLIFT VALUES IN THE SIGNED AND SEALED TRUSS DESIGN PACKAGE AND SUITABLE FOR THE GEOMETRY. EMBED STRAP ON CENTERLINE OF WALL.
2. ANY OF THE VALID LENGTHS SHOWN MAY BE USED IN PLACE OF THE LENGTH SPECIFIED ON PLAN.
3. CONNECTORS ARE SIMPSON STRONG TIE. ALL CONNECTORS SHALL BE INSTALLED IN STRICT ACCORDANCE WITH SIMPSON PRINTED INSTRUCTIONS. SUBSTITUTIONS MUST BE APPROVED IN WRITING BY THE ENGINEER OF RECORD.
4. WHERE EMBEDDED STRAPS ARE MISSING, OR MIS-LOCATED, INSTALL RETROFIT STRAP PER 1/05-3, PER UPLIFT IN TRUSS ENGINEERING.

SIMPSON CATALOG C-C- 2019



AT SWING DOORS, USE 2" RECESS STYLE
LINTEL IF NEEDED FOR ROUGH OPENING.

LINTELS BEAR 4" MIN. EACH END

1. ROOF TRUSS BEARING @ 8'-0".
2. ROOF FRAMING SHALL BE WOOD TRUSSES DESIGNED BY A DELEGATED TRUSS ENGINEER PER DESIGN CRITERIA ON SHEET S-3.
3. PROVIDE STRAPPING AT TRUSSES PER NOTES ON THIS SHEET.
4. FOR NAILING OF ROOF AND FLOOR DECK, SEE I AND ON S-3.
5. 2x8-1w etc., DENOTES PRECAST LINTEL ABOVE **DOOR** WINDOW OPENING PER SCHEDULE THIS SHEET.
6. AT TRUSS BEARING, PROVIDE 2x8 MASONRY BOND BEAM W/ I #5 CONTINUOUS, SEE DETAIL I/5-S.



TRUSS BEARING CONDITIONS AND STRAPPING IS
BASED ON TRUSS LAYOUT PREPARED BY SCOSTA
JOB#: DR1389BL DATED: 11/30/20 REVISED: NONE



$$1/4'' = 1'-0''$$

= BEARING @ 8'-0"

DESIGN IN ACCORDANCE WITH THE RESIDENTIAL
FLORIDA BUILDING CODE 2020 - 7TH EDITION



<p>This signature and seal is for work performed by the Structural Engineer of Record (SER) only. It shall not be used for other disciplines such as architectural, mechanical, plumbing, electrical, fire life safety, accessibility, energy, site work, civil, or geotechnical.</p>	<p>STRUCTURAL ENGINEERING</p> <hr/> <p>STRUCTURAL SYSTEMS OF NORTH FLORIDA</p> <p>1634 SE. 47th ST SUITE #3 CAPE CORRAL, FL 33904 (239) 549-4554</p> <p>C# 8829</p>
---	---



LOT: 9

BLOCK: 283

SUBDIVISION: LEHIGH SPOT LOTS

ADDRESS: 6611 MOND ST.

GCD JOB # 13154	D.R.H. #: 579070233
-----------------	---------------------

DATE:

07/30/21

DRAWN BY:

JSL

CHECKED BY:

JWC

REVISÉ:

PLAN:
ROOF FRAMING PLAN

SCALE: As indicated

S-2

TABLE R803.2.3.1 – NAIL SPACING BASED ON SPECIFIC GRAVITY OF RAFTER/TRUSS: ALL TRUSS TOP CHORDS AND FIELD ROOF FRAMING SHALL BE SOUTHERN PINE, SPECIFIC GRAVITY=0.55 (EXCEEDS SG=0.42 AND 0.49 OF TABLE R803.2.3.1).

ENSURE THAT ALL NAILS PENETRATE THE TOP CHORD OF THE TRUSS WITHOUT SPLITTING.

TYPICAL HOUSE PLAN

EDGE NAIL TO BLOCKING AT RIDGE VALLEY/HIP

STAGGER JOINTS AT SHEATHING PANELS

EDGE NAIL TO FACIA BOARD

NAIL SPACING (TABLE R803.2.3.1) WIND SPEED / EXPOSURE

160/B, 160/C, 170/B	170/C
NAIL SPACING: 6" O.C. EDGE 6" O.C. FIELD	NAIL SPACING: 4" O.C. EDGE 4" O.C. FIELD

NAIL TYPE (SECTION R803.2.3.1) 19/32 SHEATHING

2 1/2" x 0.131" RING SHANK OR 3" x 0.120" RING SHANK (PER ASTM F1667 RSRs-03 & 04)
--

1

NAILING OF ROOF SHEATHING

SCALE: NTS

SHEATHING SCHEDULE

EXTERIOR STUD WALL	FLOOR
7/16" ZIP SYSTEM WALL SHEATHING BY HUBER ENGINEERED WOODS LLC, NAILED W/ 8d COMMON WIRE @ 6" O.C. EDGE AND 6" O.C. FIELD. PROVIDE 2x4 BLOCKING AT ALL JOINTS. INSTALL SHEATHING AND SEAM TAPE IN STRICT ACCORDANCE WITH MFR. WRITTEN INSTRUCTIONS.	N/A
EXTERIOR CEILING	
ROOF – PER FBCR TABLE 803.2.2	
19/32 CLASS A.P.A. RATED SHEATHING, EXPOSURE 1, SPAN RATING 40/20. FASTEN WITH RING SHANK NAILS PER DETAIL 1/S-3	1) 1x4 STRIPPING @ 16"OC w/ 2-8d NAILS TO EACH TRUSS, 3/8" EXTERIOR GYPBOARD CEILING, FASTEN w/8d NAILS OR 1 1/8" DRYWALL SCREWS @ 6"OC EDGE & FIELD. 2) 3/8" BC PLYWOOD NAILED w/ 6d COMMON @ 6" OC EDGE & FIELD.
SOFFIT	ALUMINUM PERFORATED SOFFIT INSTALLED PER MANUFACTURER INSTRUCTIONS TO MEET WIND PRESSURES PER R704.

NOTE: EXTERIOR CEILINGS SPECIFIED ABOVE MEET THE DESIGN WIND PRESSURES PER R703.1.2

2

SHEATHING SCHEDULE

WINDOW/DOOR/SOFFIT DESIGN WIND PRESSURES

WIND PRESSURES PER ASCE7-16, 160 MPH, EXPOSURE C, AND CONVERTED TO ALLOWABLE STRESS DESIGN PRESSURES USING 0.6W LOAD FACTOR. (Vwsd=124 MPH, RISK CAT II, ENCLOSED, Kd=0.85, It=1.15)

TYPE	INTERIOR ZONE 4	END ZONE 5
SOFFIT (10 SQ. FT.)	+33.5 -36.3	+33.5 -44.8
WINDOWS & DOORS (10 SQ. FT.)	+33.5 -36.3	+33.5 -44.8
8' OR 9' GARAGE DOORS	+29.4 -33.3	
16' OR 18' GARAGE DOORS	+28.2 -31.5	

(SEE PLAN FOR OTHER SPECIFIC PRESSURES)

1) TABLE MAY BE USED FOR ANY SIZE WINDOW OR DOOR IN EACH TYPE.

2) USE "INTERIOR ZONE 4" PRESSURES UNLESS WINDOW OR DOOR IS LOCATED WITHIN THE "END ZONE 5" (SEE DIAGRAM BELOW), THEN USE THE HIGHER PRESSURES UNDER THE "END ZONE 5" COLUMN.

3) ALL GLASS / GLAZING SHALL BE IMPACT RATED OR USE IMPACT RATED SHUTTERS.

4) SUBMIT PRODUCT APPROVALS TO THE BUILDING DEPARTMENT AS REQUIRED BY THE LOCAL JURISDICTION.

5) MANUFACTURED SOFFIT PRODUCTS SHALL BE INSTALLED PER MFR ENGINEERING SPEC SHEETS.

* ON IRREGULAR SHAPED BUILDINGS, THERE IS NO GUIDANCE IN THE CODE FOR HOW FAR A CORNER MUST PROTRUDE FROM THE MAIN BUILDING TO BE CONSIDERED "ZONE 5". WE HAVE CHOSEN >15". THIS IS SUBJECT TO JUDGEMENT CALL BY THE AUTHORITY HAVING JURISDICTION.

IN ZONE 5, MANUFACTURED SOFFIT PRODUCTS MAY REQUIRE ADDITIONAL BATTENS OR FASTENING PER MFR ENGINEERING SPEC SHEETS TO MEET THE PRESSURE REQUIREMENTS.

TYPICAL HOUSE PLAN

END ZONE 5 PRESSURES OCCUR AT "PRIMARY" OUTSIDE CORNERS OF BUILDING (BOLD LINES)

INTERIOR ZONE 4 PRESSURES

END ZONE WIDTH = 4'-0" MEASURED FROM FACE OF WALL (FIG R301.2(7))

6

WINDOW/DOOR/SOFFIT DESIGN WIND PRESSURES

DESIGN CRITERIA:

DESIGN IN ACCORDANCE WITH REQUIREMENTS OF THE FLORIDA BUILDING CODE 7th EDITION (2020) RESIDENTIAL

1. FLOOR & ROOF UNIFORM LOADS:
ELEVATED FLOORS: LIVE LOAD 40 PSF, DEAD LOAD 20 PSF
ROOF: LIVE TOP CHORD 20 PSF
LIVE BOTTOM CHORD 10 PSF (NON-CONCURRENT w/ TOLL)
CEMENT ROOF TILE DEAD LOAD 25 PSF TOTAL
SHINGLE/METAL ROOFING DEAD LOAD 15 PSF TOTAL
MINIMUM DEAD LOAD FOR WIND: TC 5 PSF, BC 5 PSF
DEFLECTION CRITERIA:
FLOOR L/480 LIVE, L/360 TOTAL
ROOF L/240 LIVE, L/180 TOTAL

2. WIND LOADS:
WIND DESIGN PER, ASCE7-16
BASIC WIND SPEED (ASCE7-16) 160 MPH
NOMINAL WIND SPEED (Vwsd TABLE R301.2.1.3) 124 MPH
BUILDING CATEGORY II
IMPORTANCE FACTOR 1.00
EXPOSURE C
MEAN ROOF HEIGHT = 15 FT
ROOF PITCH 5/12
ENCLOSURE CLASS C
INTERNAL PRES. COEFF. +/- 0.18
WINDOW/DOOR DESIGN WIND PRESSURE PER TABLE R301.2(2), R301.2(3) AND R301.2(4), SEE DETAIL ON S-3.
SOFFITS – PER R704, ALL SOFFITS & THEIR ATTACHMENTS SHALL BE CAPABLE OF RESISTING THE DESIGN PRESSURES SPECIFIED IN TABLE R301.2(2) FOR WALLS USING 10 SQ. FT.

3. REINFORCED CONCRETE:
DESIGN AS PER ACI 318-14
REQUIRED COMPRESSIVE STRENGTH AT 28 DAYS:
SLAB ON GRADE f'c = 2500 PSI
3 1/2" MINIMUM THICKNESS REINFORCED WITH 6x6 w/1.4xw/1.4 WWF OR FIBERMESH.
CONVENTIONAL SHALLOW FOOTINGS f'c = 2500 PSI
BEAMS AND COLUMNS f'c = 3000 PSI
ALL OTHER CONCRETE (U.N.O.) f'c = 3000 PSI
UNLESS OTHERWISE SHOWN ON DRAWINGS, MINIMUM CONCRETE COVER FOR REINFORCING SHALL BE AS FOLLOWS:
FOOTINGS 3" CENTERED
SLAB ON GRADE 2"
BEAMS 1 1/2"
COLUMNS 1 1/2"
ALL REINFORCING STEEL SHALL BE PLACED IN ACCORDANCE WITH THE TYPICAL BENDING DIAGRAMS AND PLACING DETAILS OF ACI STANDARDS AND SPECIFICATIONS. ALL REINFORCING STEEL SHALL BE HELD SECURELY IN POSITION WITH STANDARD ACCESSORIES DURING PLACING OF CONCRETE.
REINFORCING STEEL – ASTM A615 GRADE 40 FOR #3 GRADE 60 FOR #4 TO #11
WELDED WIRE FABRIC – ASTM A185
SPICES IN REINFORCING SHALL BE 40 BAR DIAMETERS. NON-CONTACT LAP SPICES MAY BE USED PROVIDED REINFORCING IS NOT SPACED MORE THAN 5" APART FOR #5 BARS.
FORMWORK AND SHORING SHALL REMAIN IN PLACE UNTIL CONCRETE HAS REACHED AT LEAST 2/3 OF THE REQUIRED 28 DAY STRENGTH.

4. REINFORCED MASONRY:
DESIGN PER TMS 402/602-16
REQUIRED COMPRESSIVE STRENGTHS:
MASONRY WALLS f'm = 1500 PSI
REINFORCING STEEL – ASTM A615 GRADE 60.
SPICES IN REINFORCING, SHALL BE 48 BAR DIAMETERS.
ALL CONCRETE MASONRY UNITS SHALL BE COMPOSED OF ASTM C90, GRADE N-1 HOLLOW CONCRETE MASONRY UNITS WITH TYPE "S" MORTAR. GROUT ALL CELLS CONTAINING VERTICAL REINFORCEMENT WITH 3000 PSI PEA ROCK CONCRETE GROUT. ALL CELLS BELOW FINISHED GRADE SHALL BE GROUTED SOLID. ALL EXTERIOR WALLS SHALL BE REINFORCED FULL HEIGHT AT DOT LOCATIONS ON PLAN.

5. DELEGATED-ENGINEERED WOOD ROOF TRUSSES:
ALL WOOD ROOF TRUSSES SHALL BE DESIGNED BY A DELEGATED TRUSS ENGINEER PER RULE 61G15-31.003 OF THE FLORIDA ADMINISTRATIVE CODE. ALL TRUSSES SHALL HAVE TEMPORARY BRACING PER "COMMENTARY AND RECOMMENDATIONS FOR HANDLING, INSTALLING AND BRACING METAL PLATE CONNECTED WOOD TRUSSES, HIB-91." FOR OTHER BRACING REQUIREMENTS, NOTIFY ENGINEER. PROVIDE PERMANENT BRACING PER TRUSS MFR. SHOP DRAWINGS. IF PERMANENT BRACING IS NOT SPECIFIED, CONTACT ENGINEER.

6. FOUNDATION:
CONVENTIONAL SHALLOW CONCRETE FOOTINGS
SOIL BEARING CAPACITY
THE CONTRACTOR SHALL BE RESPONSIBLE FOR DETERMINING THE SUITABILITY OF THE SOIL CONDITIONS FOR THE INTENDED STRUCTURE AND ASSUMED SOIL BEARING CAPACITY.
IT IS RECOMMENDED THAT A GEOTECHNICAL FIRM BE HIRED TO PERFORM A SITE EVALUATION.

7. DIMENSIONS: VERIFY ALL DIMENSIONS WITH HOUSE PLANS. SEE HOUSE PLANS, MECHANICAL, ELECTRICAL AND PLUMBING DRAWINGS FOR EMBEDS, OPENINGS, SLEEVES, ETC. WHICH ARE NOT SHOWN ON STRUCTURAL DRAWINGS.

8. MEANS AND METHODS: THE STRUCTURAL ENGINEER SHALL NOT HAVE CONTROL OR BE RESPONSIBLE FOR CONSTRUCTION MEANS, METHODS, TECHNIQUES, PROCEDURES, OR SEQUENCES TEMPORARY BRACING, SHORING, GUYING OR OTHER MEANS TO SUPPORT STRUCTURAL ELEMENTS IN PLACE DURING CONSTRUCTION. FOR THE ACTS OR OMISSIONS OF THE CONTRACTOR, OR ANY OTHER PERSONS PERFORMING THE WORK OR FOR THE FAILURE OF ANY OF THEM TO CONSTRUCT THE WORK IN ACCORDANCE WITH THE CONTRACT DOCUMENTS.

9. SHOP DRAWINGS: SHOP DRAWINGS SHALL BE PREPARED AND SUBMITTED TO THE ENGINEER FOR REVIEW FOR ALL STRUCTURAL ELEMENTS UTILIZING PREFABRICATED COMPONENTS. ONE SET OF SIGNED & SEALED TRUSS ENGINEERING SHALL BE DELIVERED TO THE ENGINEER OF RECORD FOR THE STRUCTURE PER FLORIDA ADMINISTRATIVE CODE 61G15-30.005 AND 61G15-31.003.

FOR SCOSTA TRUSSES, MODEL 1389 ELEVATION B, JOB # DRI389BL, DATED: 11/30/20, REVISED: NONE

MAY BE SLOPED OR VERTICAL

DOWEL TO MATCH WALL REINFORCING, LAP 25"

FINISHED GRADE, SEE SITE PLAN

MONOLITHIC FOOTING, SEE PLAN

12" MIN

W

5" WITH 10" STD HOOK

3" CLEAR COVER TO REINFORCING

A EDGE

VARIES

W

C STEPDOWN

CURB IS OPTIONAL AND NOT INCLUDED IN DEPTH OF FOOTING

#5 PROTRUDE 25"

VARIES

D GARAGE

12" MIN

W

4

MONOLITHIC FOOTINGS

SCALE: 3/4" = 1'-0"

3/4" DEEP SAWCUT w/ ELASTOMERIC SEALANT

SLAB ON GRADE, SEE PLAN

NOTES:
1) PROVIDE SAWCUTS TO CREATE APPROXIMATE 20' X 20' MAXIMUM SQUARES.
2) SAWCUT CONCRETE SLAB WITHIN 4 TO 12 HOURS OF CONCRETE PLACEMENT.

5

SLAB SAWCUT DETAIL

SCALE: NTS

FOOTING REINF., SEE PLAN

LAP CORNER BARS 40 BAR DIAMETERS

CONCRETE FOOTING, SEE PLAN

PLAN VIEW

6

FOOTING CORNER BARS

SCALE: NTS

8" CMU WALLS

2x4 or 2x6 P.T. BUCK @ FLANGED WINDOWS (SEE NOTE)

1/4" x 3 3/4" TAPCON @ 24" OC, 3 SCREWS MIN. (SEE NOTE)

WINDOW/DOOR ROUGH OPENING

DOOR

2x8 OR 2x6 P.T. SYP #2

2x2x1/8" WASHER

1/2" Ø EXPANSION BOLT, 4" MIN. EMBEDMENT, SPACE 24" OC AND 12" FROM TOP & BOT.

7

BUCK FASTENING

NOTE: THIS BUCK FASTENING DETAIL IS INTENDED FOR FLANGED WINDOW/DOOR PRODUCTS THAT FASTEN THRU THE FLANGE WITH WOOD SCREWS TO THE BUCK. FOR WINDOW/DOOR PRODUCTS THAT DO NOT HAVE A FLANGE AND FASTEN INSTEAD OUTWARD THRU THE FRAME, USE MASONRY SCREWS PER MFR. THAT ARE LONG ENOUGH TO PENETRATE 2-1/4" INTO THE MASONRY. IN THIS CASE, THE BUCK MATERIAL IS SIMPLY A SPACER AND MAY BE 1x4 OR 1x6 OR OMITTED ENTIRELY AND THE SPACER MAY BE TACKED IN PLACE WITH MASONRY NAILS OR PINS.

INTERSECTION

CORNER

8

CORNER BAR DETAIL IN BOND BEAMS

SCALE: 3/4" = 1'-0"

"OB" DENOTES NO REBAR IN LINTEL, "IB" DENOTES 1#5 IN LINTEL

7" STANDARD HOOK INTO TOP OF BOND BEAM (MAY USE 7"x25" BENT BAR)

8"x8" BOND BEAM w/ 1-#5

BEARING

PRECAST LINTEL

ROUGH OPENING

4" MINIMUM BEARING

VERTICAL BAR IN GROUTED CELL, SEE PLAN

#5 VERTICAL IN GROUTED CELL AT DOT LOCATIONS ON PLAN

MASONRY WALL

9

BOND BEAM & REINFORCING

SCALE: 3/4" = 1'-0"

RETROFIT STRAPS TO CONCRETE/MASONRY

TRUSS UPLIFT (LBS) @ 24" OC	CONNECTOR
TO 840	1-MTSM16 or 20
TO 1045	1-HTSM16 or 20
TO 2090	2-HTSM16 or 20
TO 4300	2-LGT2
TO 3480	HTT16
TO 10530	HGT-2/3

NOTES:
1) WHERE EMBEDDED STRAP IS MISSING OR MIS-LOCATED, PROVIDE A STRAP FROM THE ABOVE LIST AT EACH ROOF TRUSS BEARING POINT, BASED ON THE TRUSS UPLIFT VALUES IN THE SIGNED AND SEALED TRUSS DESIGN PACKAGE.
2) CONNECTORS ARE SIMPSON STRONG TIE. ALL CONNECTORS SHALL BE INSTALLED IN STRICT ACCORDANCE WITH SIMPSON PRINTED INSTRUCTIONS.

10

RETROFIT UPLIFT CONNECTOR SCHEDULE

ROOF COVERING AS SELECTED BY BUILDER PER:
FBCR 905.2 ASPHALT SHINGLES
FBCR 905.3 CLAY AND CONCRETE TILE
FBCR 905.10 METAL ROOF PANELS

ROOF SHEATHING, SEE SCHEDULE 2/S-3

WOOD TRUSSES @ 24" OC, DESIGNED BY DELEGATED TRUSS ENGINEER

EMBEDDED STRAP AT EACH ROOF TRUSS, SEE ROOF PLAN. BREAK OUT WEB OF BLOCK AS NEEDED TO PROPERLY LOCATE EACH STRAP

APPROVED ISOLATION PLATE

8"x8" CONTINUOUS MASONRY BOND BEAM w/ 1-#5, GROUT SOLID. PROVIDE CORNER BARS PER DETAIL 8/S-3

ALUMINUM SOFFITS SHALL MEET WIND DESIGN PRESSURES PER R704 INSTALLED PER MFR. SPECS.

#5 VERT. IN GROUTED CELL AT DOT LOCATIONS ON PLAN (48" OC MAX EXTERIOR)

#5 STANDARD HOOK INTO TOP OF BOND BEAM

#5 VERTICAL SHALL HAVE 7" STANDARD HOOK INTO TOP OF BOND BEAM

DOWEL TO MATCH WALL REINFORCING, LAP 25"

FINISHED GRADE, SEE SITE PLAN

MONOLITHIC FOOTING, SEE PLAN

MERGE PAD FOOTINGS WITH EDGE FOOTINGS

W

EMBED DOWELS 5" WITH 10" STD HOOK

3" CLEAR COVER TO REINFORCING

11

FULL HEIGHT WALL SECTION

SCALE: 3/4" = 1'-0"

TOP CHORD OF GABLE END TRUSS

2x4 BLOCK AT SHEATHING JOINT

ROOF SHEATHING, SEE SCHEDULE

9" MAX PER R803.2.3

3-12d TOE NAILS

2x4 OUTLOOKER @ 24" O.C.

WALL SHEATHING PER 2/S-3

12

OUTLOOKER DETAIL

SCALE: N.T.S.

At Exterior Stud Walls and Gable Ends with Wall Sheathing, apply plaster over metal lath over water resistive barrier as follows:
Plaster R703.7.2: 3-coat 7/8" thick portland cement based plaster per ASTM C926.
Metal Lath R703.7.1: Self furring paper backed 2.5lb diamond mesh metal lath per ASTM C847, G60 galvanized, fastened per ASTM C1063 with 1-1/2" long, 11 gage nails with 7/16" head (roofing nails) at 7" oc, or 1-1/2" long, 16 gage staples at 6" oc, into the framing members (ie, the nails or staples must align with and penetrate 3/4" into the framing studs).
Water Resistive Barrier (WRB) R703.7.3: Water-resistive vapor-permeable barrier with a performance at least equivalent to 2 layers of Grade D paper. The individual layers shall be installed independently. An approved house wrap may be used for the 1st layer and metal lath with approved paper backing may be the 2nd layer (Note: ZIP wall sheathing with seam tape qualifies as the first layer).

DESIGN/DRAWN DWB/DWB

CHECKED DWB

DATE 08/02/21

SCALE VARIES

JOB NO. DR 13154

SHEET

S - 3

SHEET 3 OF 3

REVISIONS

BY

STRUCTURAL ENGINEERING:

STRUCTURAL SYSTEMS OF NORTH FLORIDA

1634 S.E. 47th STREET, SUITE #3
CAPE CORAL, FL 33904
(239) 549-4554
CA# 8629

DESIGNED IN ACCORDANCE WITH FLORIDA BUILDING CODE 7th EDITION (2020) RESIDENTIAL

BUILDER:

D.R. HOOTON

America's Builder

STRUCTURAL DETAILS

MODEL 1389 EXPRESS B

661 LOMOND STREET
LEHIGH ACRES / ALVA, FLORIDA
LOT: 9 BLOCK: 283 SUBDIVISION: LEHIGH SPOT LOTS

FOR SCOSTA TRUSSES, MODEL 1389 ELEVATION B, JOB # DRI389BL, DATED: 11/30/20, REVISED: NONE

DESIGN/DRAWN DWB/DWB

CHECKED DWB

DATE 08/02/21

SCALE VARIES

JOB NO. DR 13154

SHEET

S - 3

SHEET 3 OF 3