



FITNESS TILE CONNECT

DATASHEET

www.thegymfloorstore.com






TABLE OF CONTENTS

I.	DIMENSIONS & COLOURS	02
----	----------------------	----

II.	FITNESS TILES CONNECT	04
-----	-----------------------	----

II.	CONNECTOR	06
-----	-----------	----

III.	NOISE REDUCTION	08
------	-----------------	----

VI.	BENEFITS	10
-----	----------	----

01.	FIFTEEN	12
-----	---------	----

02.	PURE BLACK	14
-----	------------	----

03.	70% EPDM	16
-----	----------	----

04.	SPECIAL	18
-----	---------	----

05.	RAMPS	20
-----	-------	----



06.	CORNERS	24
-----	---------	----

I. DIMENSIONS & COLOURS

Ensuring our products remain easy to install, we kept the 30 mm and 40 mm thick square tiles at a size of 500 x 1.000 mm. Our tiles of 20 mm thickness are double the size, they have a dimension of 1.000 x 1.000 mm.


The matching ramps and corners add 250 mm to the total width and are available in 20, 30 and 40 mm thicknesses.

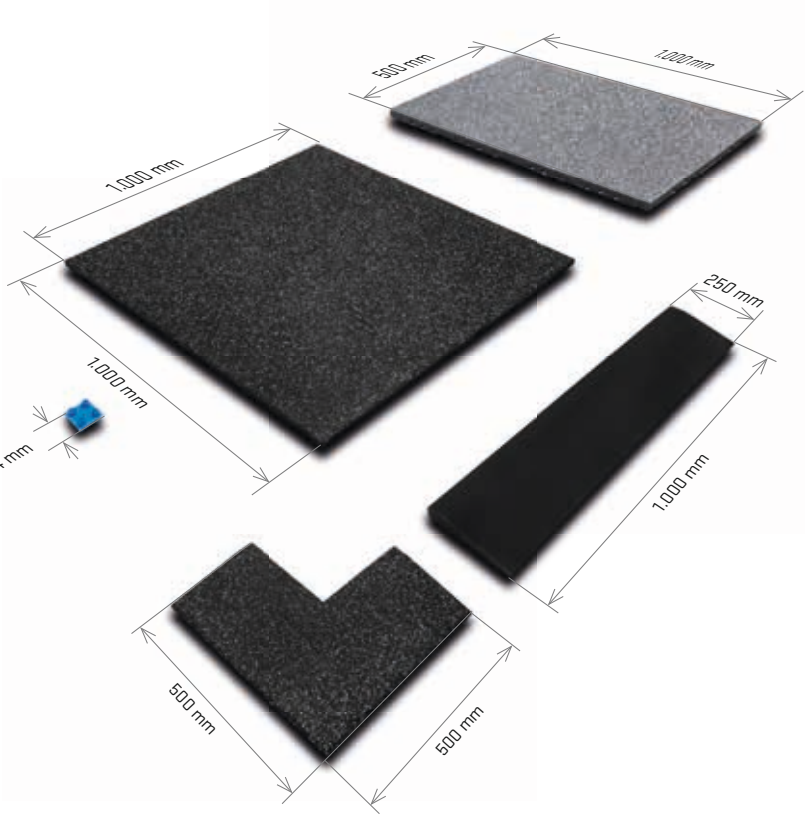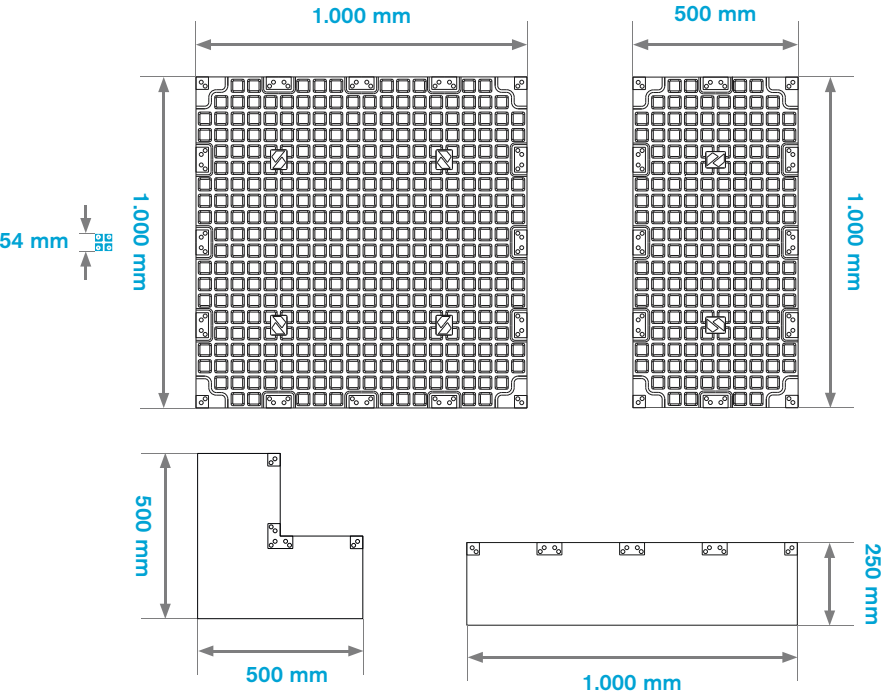DIMENSIONS



WIDE RANGE OF COLOURS

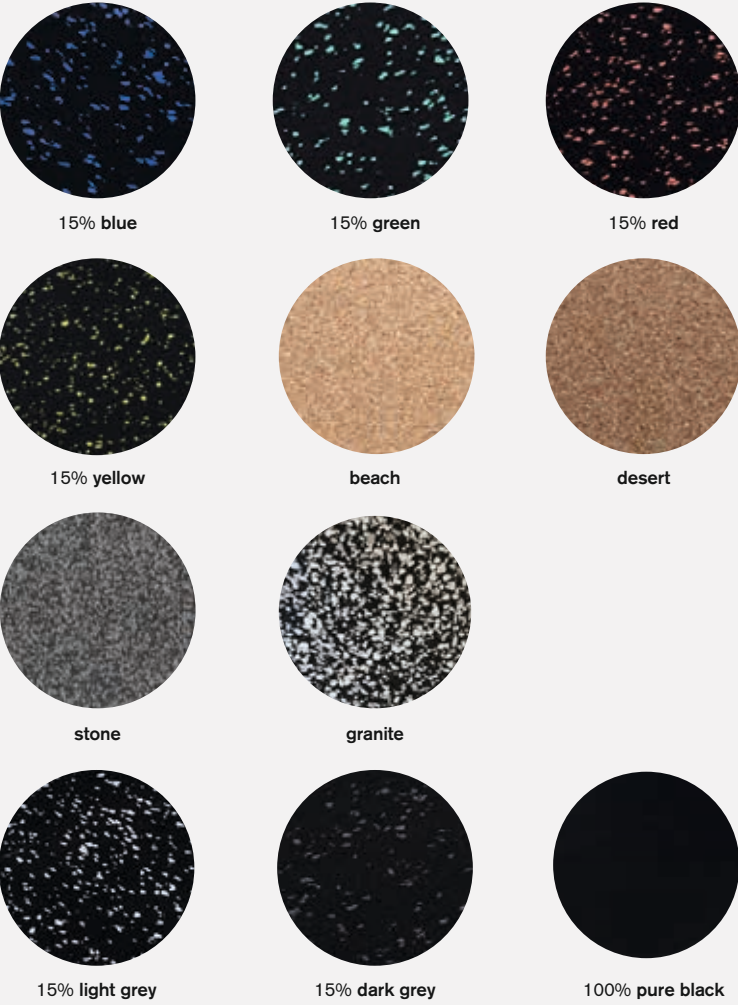
20 MM THICKNESS



30 MM THICKNESS




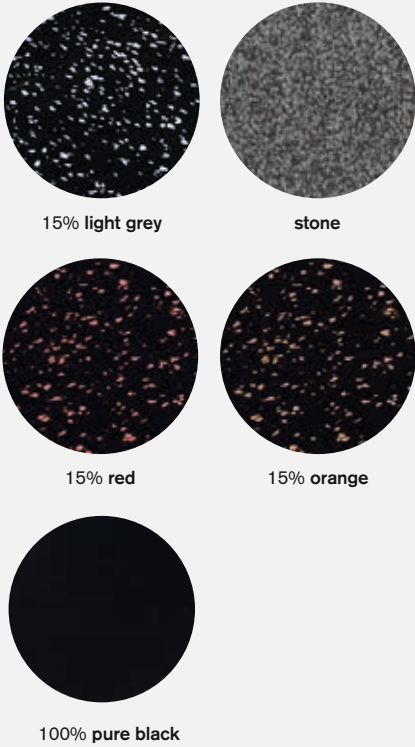40 MM THICKNESS



II. FITNESS TILE CONNECT

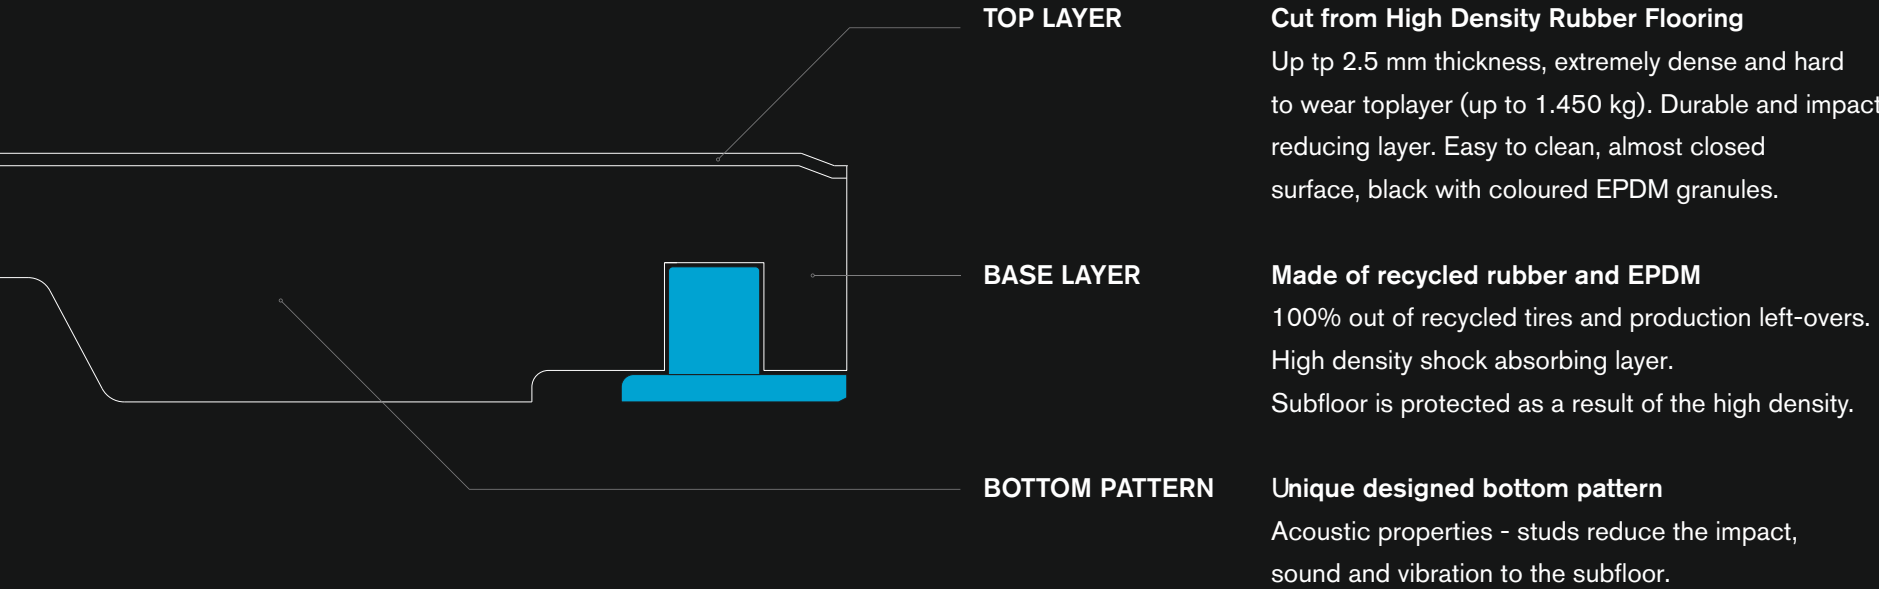The **Fitness Tiles Connect** is highly durable and tough. The extremely dense toplayer provides sufficient impact protection against the continuous dropping of heavy freeweights. The sublayer and purpose designed bottom structure will absorb noise whilst also providing additional protection to the sublayer or screed. These tiles can even be laid on top of existing floor coverings and are very easy to install using the unique connector system. Next to convenience, using connectors also has aesthetic and hygiene advantages as it creates nearly invisible joints.



THE BOTTOM

Our impact bottom, designed for shock absorption and reducing impact sound. The pattern on the bottom holds holes for the connector system. The tiles are manufactured in a single process which vulcanizes the top layer onto the bottom in one step.


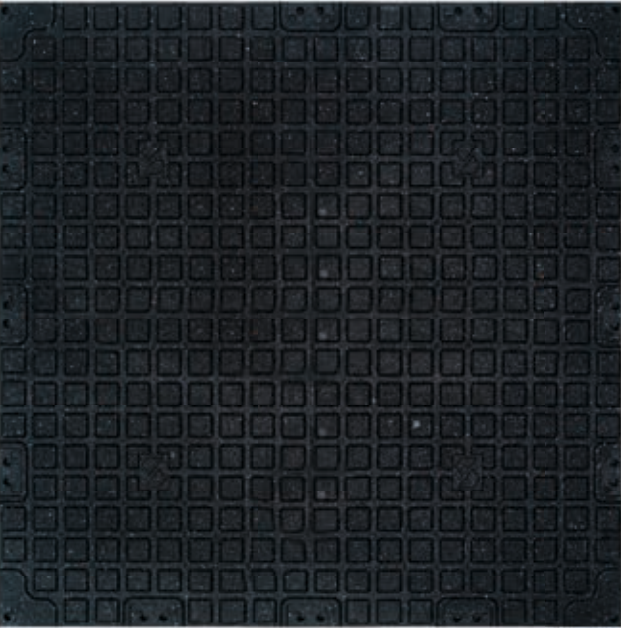


IMAGE Fitness Tile Connect - 1.000 x 1.000 mm

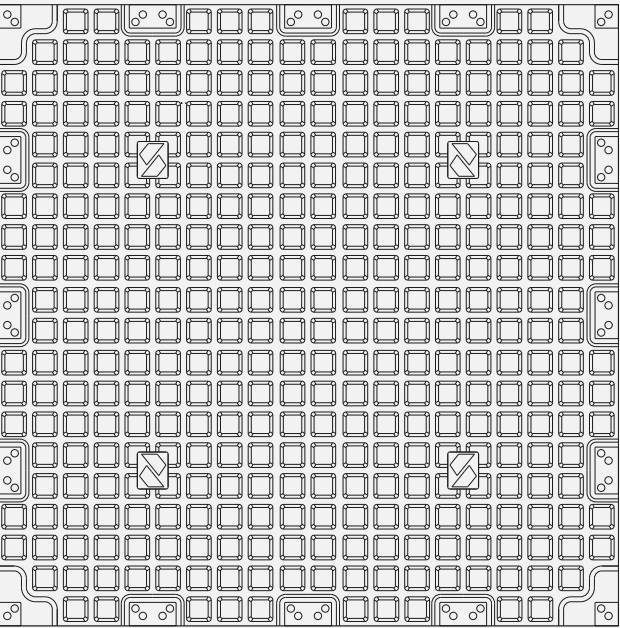SIDE VIEW




BOTTOM VIEW



III. CONNECTORS

The Fitness Tiles can be installed easily by using the connector system, there is no need to glue these. Edges can be covered with a stainless steel or aluminium profile.

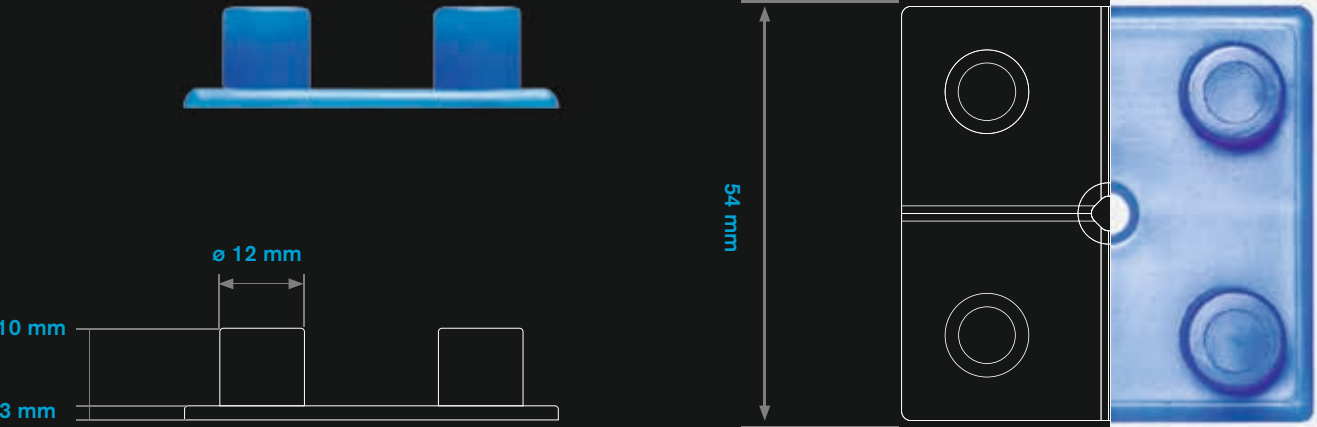The tiles can easily be cut to the right size using a handknife, for which we recommend to use hollow knives. Use a rubber hammer to close the joints .



THE CONNECTOR SYSTEM

A connector is positioned at intervals of 20 centimeters, resulting in an average utilization of 7 connectors per square meter tile and 5 connectors per half-square meter tile. This, coupled with our connectors' construction from PolyPropylene, guarantees secure tile placement once connected.

This yields an outstanding free-floating system, accomplished without the need for adhesive or intricate installation techniques.

SIDE VIEW + CONNECTORS



BOTTOM VIEW + CONNECTORS


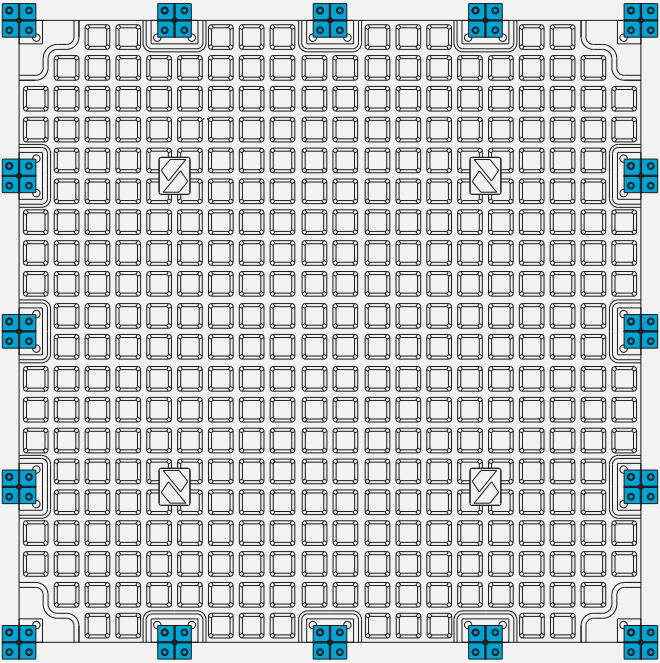


IMAGE Fitness Tile Connect - 1.000 x 1.000 mm + CONNECTORS

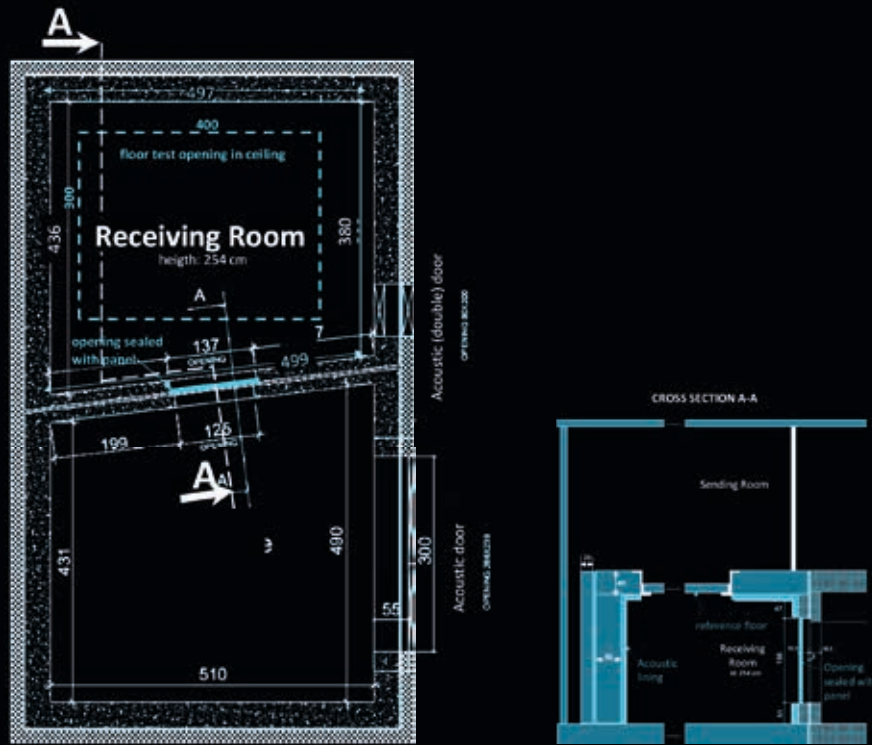IV. NOISE REDUCTION



The test rooms meet the requirements of ISO 10140-5
Both rooms are isolated for vibrations by using a so called room-in-room construction.

One of the most common complaints about fitness facilities, coming from both members as neighbours, is that sound and vibration travels further and more intense than people feel comfortable with. Cautiously made decisions with regards to particularly your performance areas can play a pivotal role in the success of your business.

We have worked hard to create the ideal solution for maximum sound reduction, whilst also making sure not to add unreasonable extra costs to this product.

Our Fitness Connect Tiles were purposely engineered with a unique structured bottom which minimizes contact with the subfloor. Together with the tiles’ composition and construction it intercepts, absorbs and disperses sound and vibration.

CERTIFIED NOISE REDUCING CAPABILITES

In order to solidify our findings, we have partnered up with an acoustics laboratory accredited according NBN EN ISO 17025:2005, to execute a test for measurement of the reduction of impact noise by a floating floor system on a heavyweight standard floor.

The full report can be provided on request.

Summarizing the report, using our **Fitness Connect Tiles**, leads to the following results:

20 MM THICKNESS

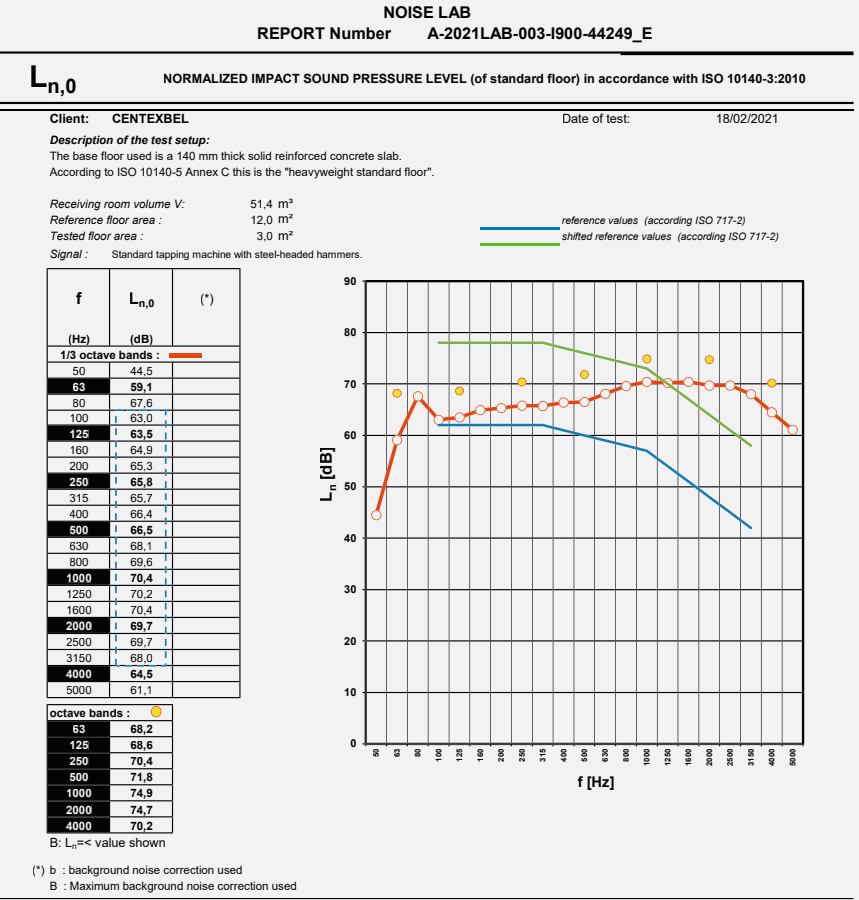
21 DB REDUCTION*

30 MM THICKNESS

24 DB REDUCTION

*20 MM THICKNESS + 20 MM COMPOSITE FOAM

28 DB REDUCTION



DESCRIPTION OF THE TEST SETUP:
The base floor used is a 140 mm thick solid reinforced concrete slab.
According to ISO 10140-5 Annex C this is the „heavyweight standard floor“.

No.of test report: SONI893
Name of test institute: Daidalos Peutz
Date: 18/02/2021

V. BENEFITS



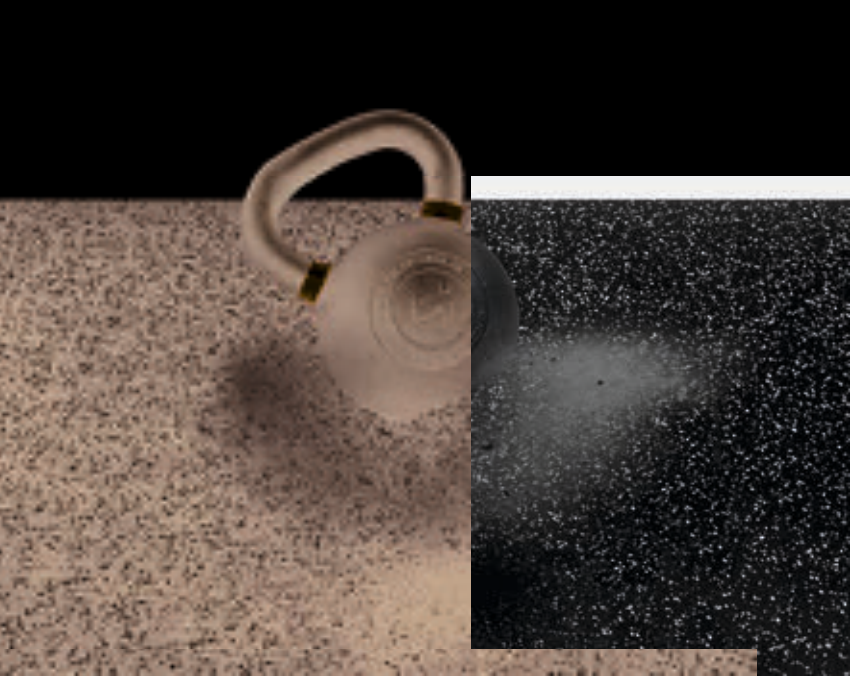
EASY TO CLEAN



EASY TO INSTALL



EXTENSIVE 5 YEAR WARRANTY



ACOUSTIC QUALITIES

01. FIFTEEN









The Fitness Tile Connect FIFTEEN's toplayer consists of **85% SBR** and holds **15% coloured EPDM**.

SPECIFICATIONS

Bulk density toplayer	Approx. 1.050 kg/m³	
Bulk density sublayer	Approx. 1.000 kg/m³	
Tolerances	+/- 1,5 %	
Sound insulation Certified Noise Reducing	20mm	21dB reduction
	30mm	24d dB reduction
	40mm	not specified
Shock Absorption	EN 14808	61%
Vertical deformation	EN 14809	5 mm
Head injury criteria (HIC) test	EN 1177	1,5 m at 50 mm thickness
EU fire classification	EF1	
Dynamic coefficient of friction	Dry slip resistance	
Thermal resistance	0,16 m². K/W	
Additional	Compliance with content of pentachlorophenol Antistatic floor covering	

COLOURS

Dimensions & Thickness

Dimension	1000 x 1000 mm			500 x 1000 mm
20 mm				
	15% blue	15% green	15% red	15% light grey
30 mm				
	15% yellow	15% light grey	15% darkgrey	15% light grey
40 mm				
	15% orange	15% light grey	15% red	15% light grey

REFERENCE






02. PURE BLACK

The Fitness Tile Connect PURE BLACK consists of **100% SBR**

SPECIFICATIONS

Bulk density toplayer	Approx. 1.050 kg/m³	
Bulk density sublayer	Approx. 1.000 kg/m³	
Tolerances	+/- 1,5 %	
Sound insulation Certified Noise Reducing	20mm	21dB reduction
	30mm	24d dB reduction
	40mm	not specified
Shock Absorption	EN 14808	61%
Vertical deformation	EN 14809	5 mm
Head injury criteria (HIC) test	EN 1177	1,5 m at 50 mm thickness
EU fire classification	EF1	
Dynamic coefficient of friction	Dry slip resistance	
Thermal resistance	0,16 m². K/W	
Additional	Compliance with content of pentachlorophenol Antistatic floor covering	



COLOURS

Dimensions & Thickness

Dimension	1000 x 1000 mm	500 x 1000 mm
20 mm		
	100% pure black	100% pure black
30 mm		
		100% pure black
40 mm		
		100% pure black

03. 70% EPDM




The Fitness Tile Connect 70% EPDM consists of **70% coloured EPDM**.

SPECIFICATIONS

Bulk density toplayer	Approx. 1.350 kg/m³	
Bulk density sublayer	Approx. 1.000 kg/m³	
Tolerances	+/- 1,5 %	
Sound insulation Certified Noise Reducing	20mm	21dB reduction
	30mm	24d dB reduction
	40mm	not specified
Shock Absorption	EN 14808	61%
Vertical deformation	EN 14809	5 mm
Head injury criteria (HIC) test	EN 1177	1,5 m at 50 mm thickness
EU fire classification	Dfl	
Dynamic coefficient of friction	Dry slip resistance	
Thermal resistance	0,16 m². K/W	
Additional	Compliance with content of pentachlorophenol Antistatic floor covering	

COLOURS

Dimensions & Thickness

Dimension	1000 x 1000 mm	500 x 1000 mm
20 mm		
	Stone	Granite
30 mm		
	Stone	
40 mm		
	Stone	





04. SPECIALS

The toplayer of the Fitness Tile Connect DESERT and BEACH consists of a *mix between EPDM and shoe production leftovers.*


SPECIFICATIONS

Bulk density toplayer	Approx. 1.450 kg/m³	
Bulk density sublayer	Approx. 1.000 kg/m³	
Tolerances	+/- 1,5 %	
Sound insulation Certified Noise Reducing	20mm	21dB reduction
	30mm	24d dB reduction
	40mm	not specified
Shock Absorption	EN 14808	61%
Vertical deformation	EN 14809	5 mm
Head injury criteria (HIC) test	EN 1177	1,5 m at 50 mm thickness
Dynamic coefficient of friction	Dry slip resistance	
Thermal resistance	0,16 m². K/W	
Additional	Compliance with content of pentachlorophenol Antistatic floor covering	

COLOURS

Dimensions & Thickness

Dimension	1000 x 1000 mm		
20 mm			
	beach	desert	honeycomb




05. RAMPS

The Fitness Tile Connect RAMPS are available in **100% pure black** and with **15% coloured EPDM**.









SPECIFICATIONS


Bulk density toplayer	From approx. 1.050 kg/m³ up to 1.450 kg/m³	
Bulk density sublayer	Approx. 1.000 kg/m³	
Tolerances	+/- 1,5 %	
Sound insulation Certified Noise Reducing	20mm	21dB reduction
	30mm	24d dB reduction
	40mm	not specified
Shock Absorption	EN 14808	61%
Vertical deformation	EN 14809	5 mm
Head injury criteria (HIC) test	EN 1177	1,5 m at 50 mm thickness
EU fire classification	EF1	
Dynamic coefficient of friction	Dry slip resistance	
Thermal resistance	0,16 m². K/W	
Additional	Compliance with content of pentachlorophenol Antistatic floor covering	






COLOURS

Dimensions & Thickness

Dimension		250 x 1.000 mm					
20 mm							
		pure black	15% light grey	15% dark grey	15% blue	15% green	15% red
30 mm							
		15% yellow	stone	granite	beach	desert	
40 mm							
		pure black	15% light grey	15% dark grey	stone		
40 mm							
		pure black	15% light grey	stone	15% orange		

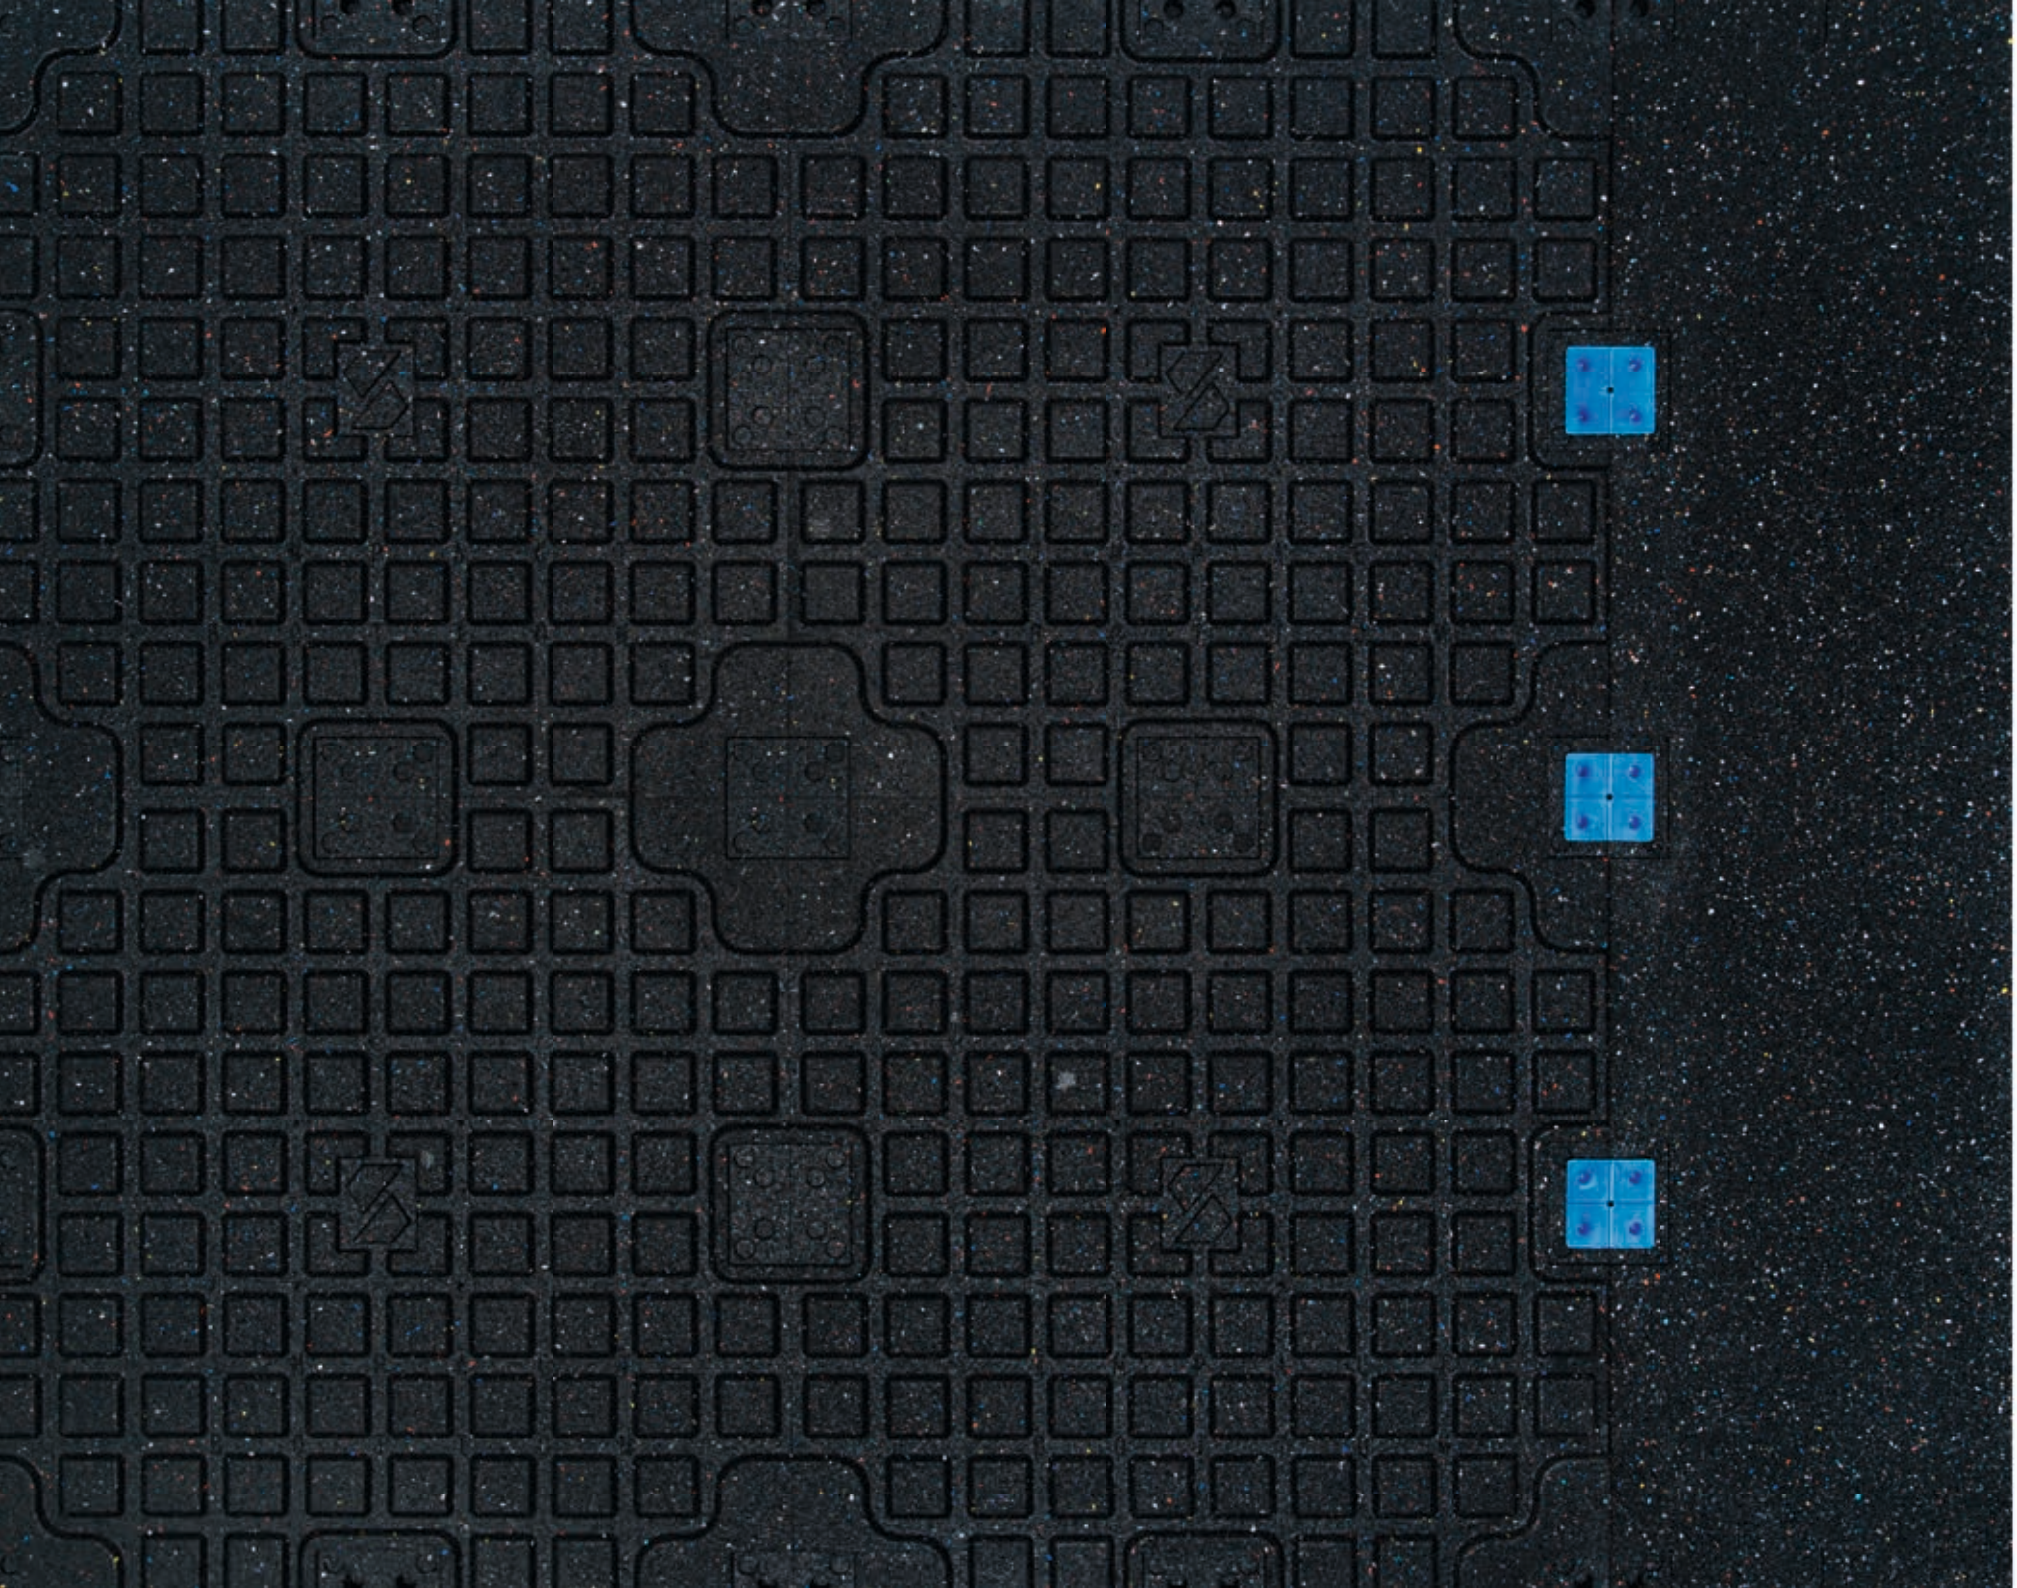

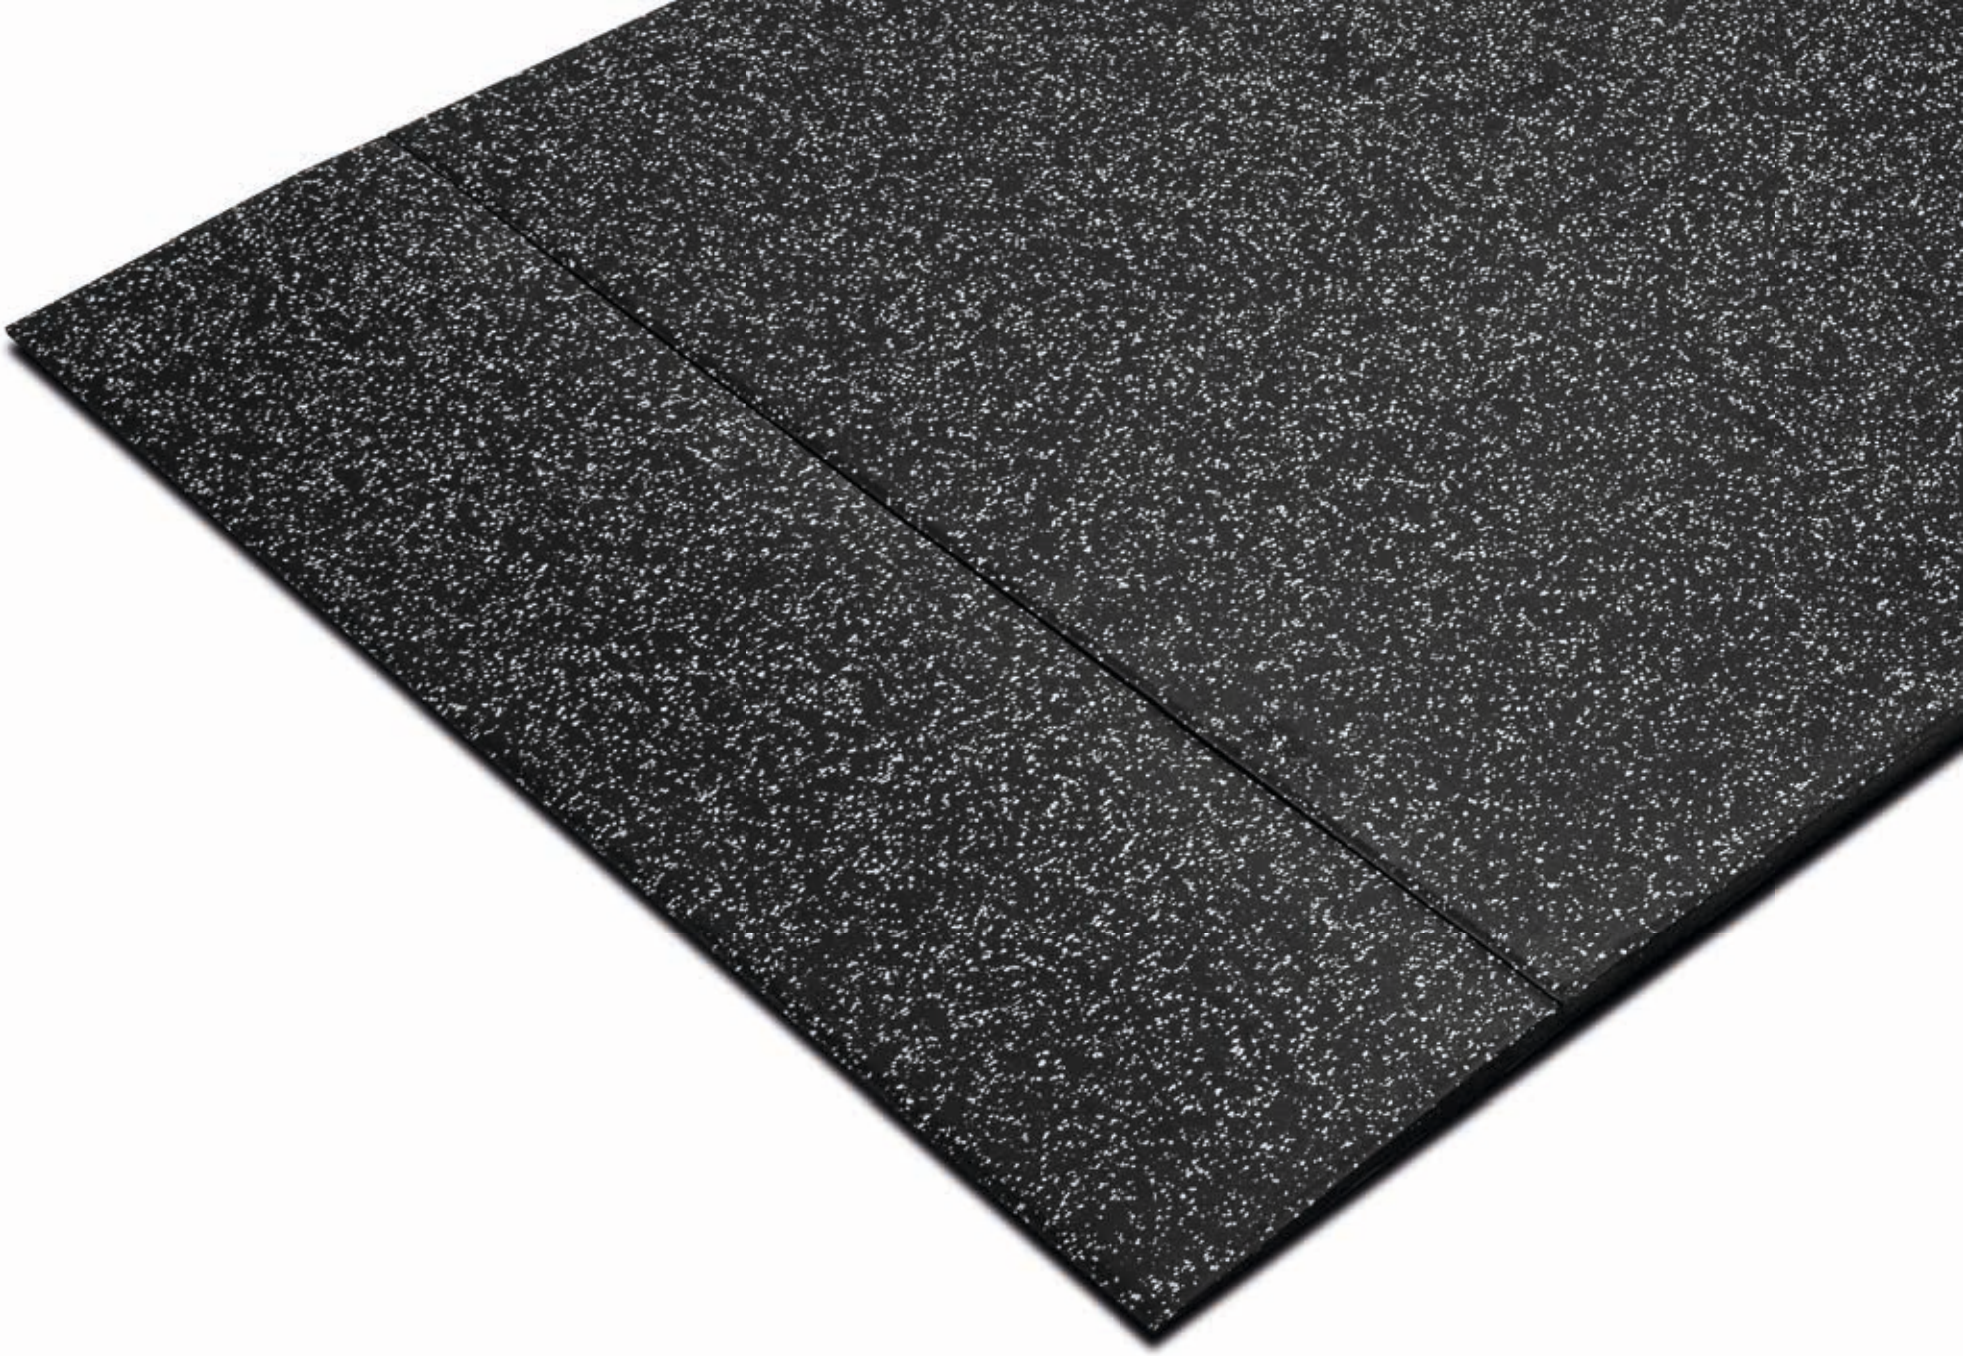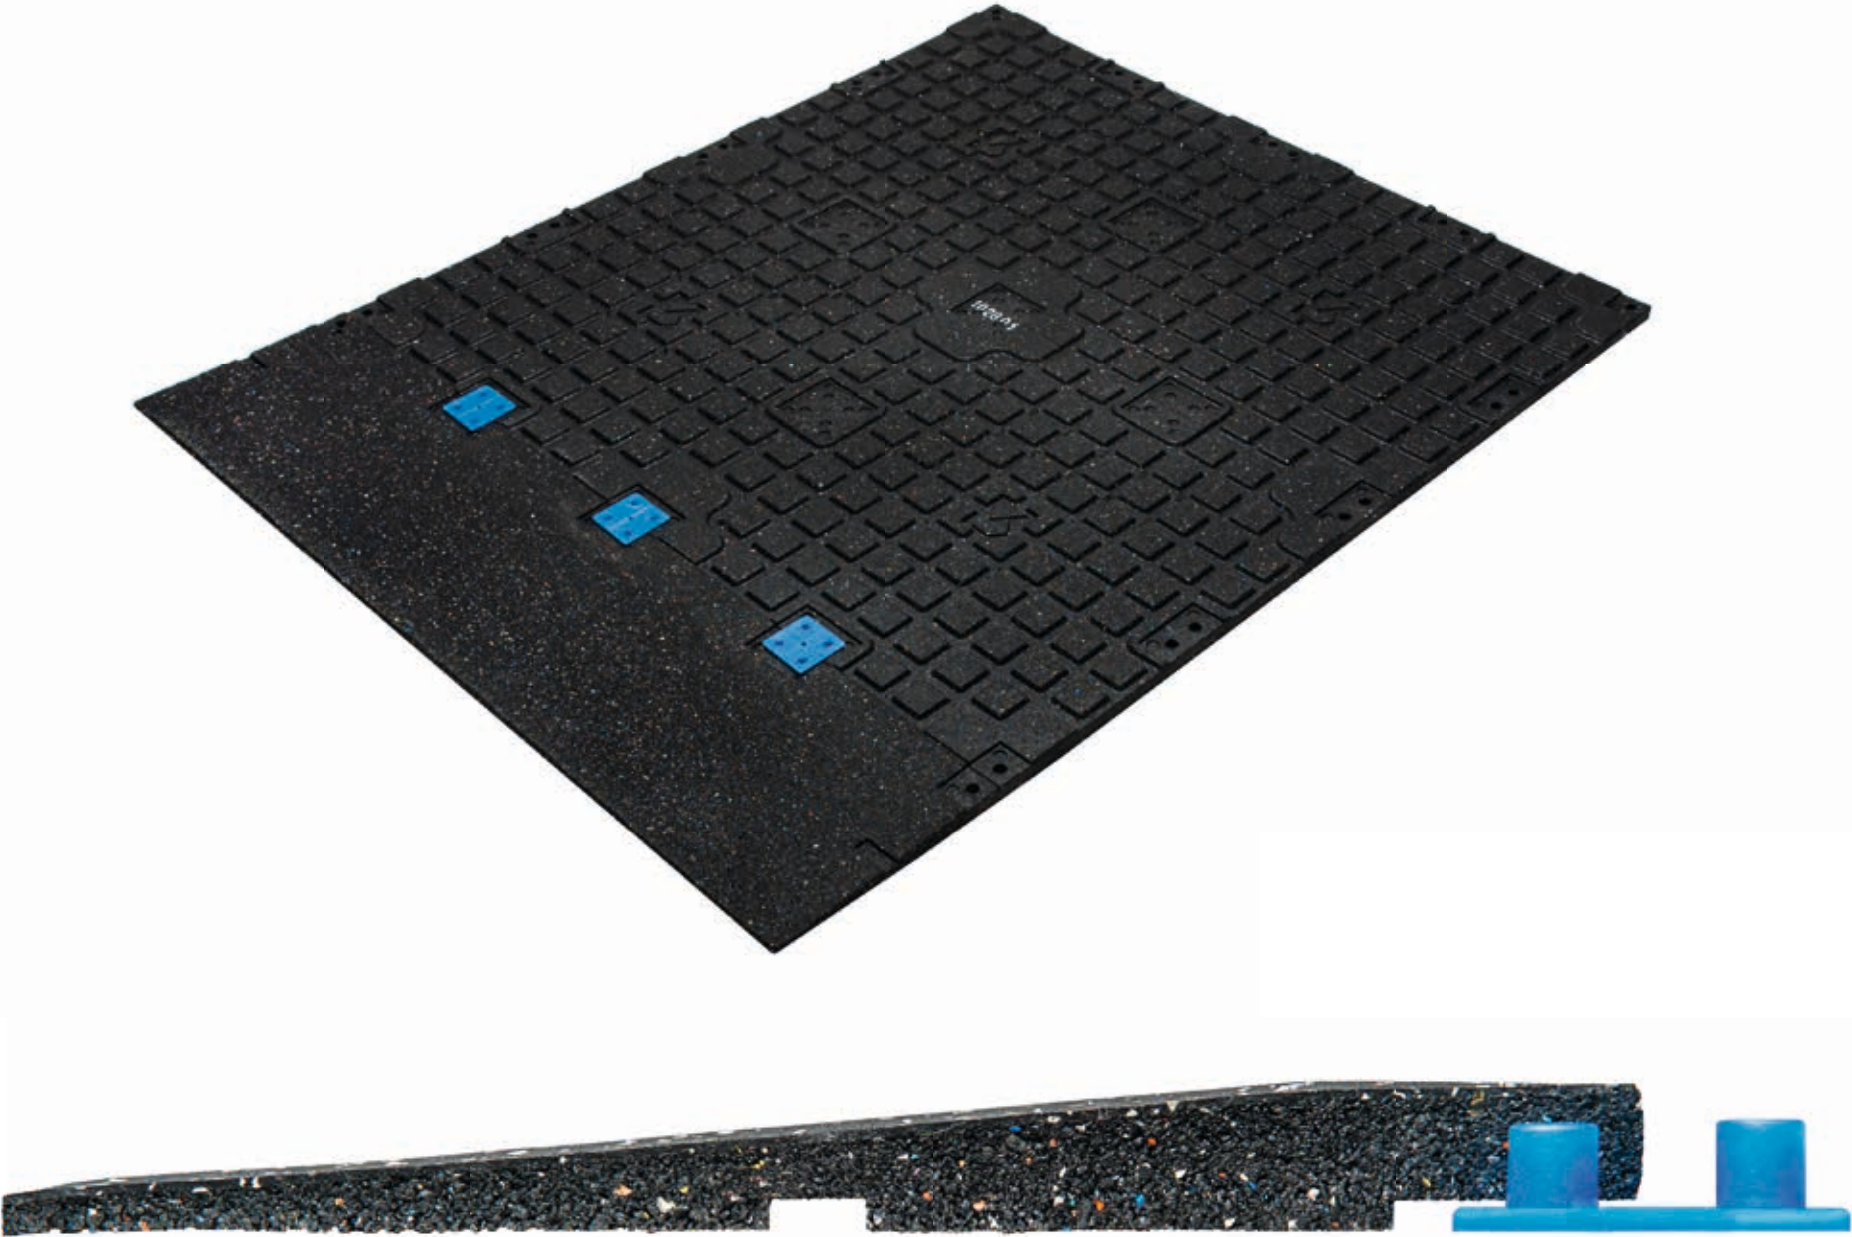

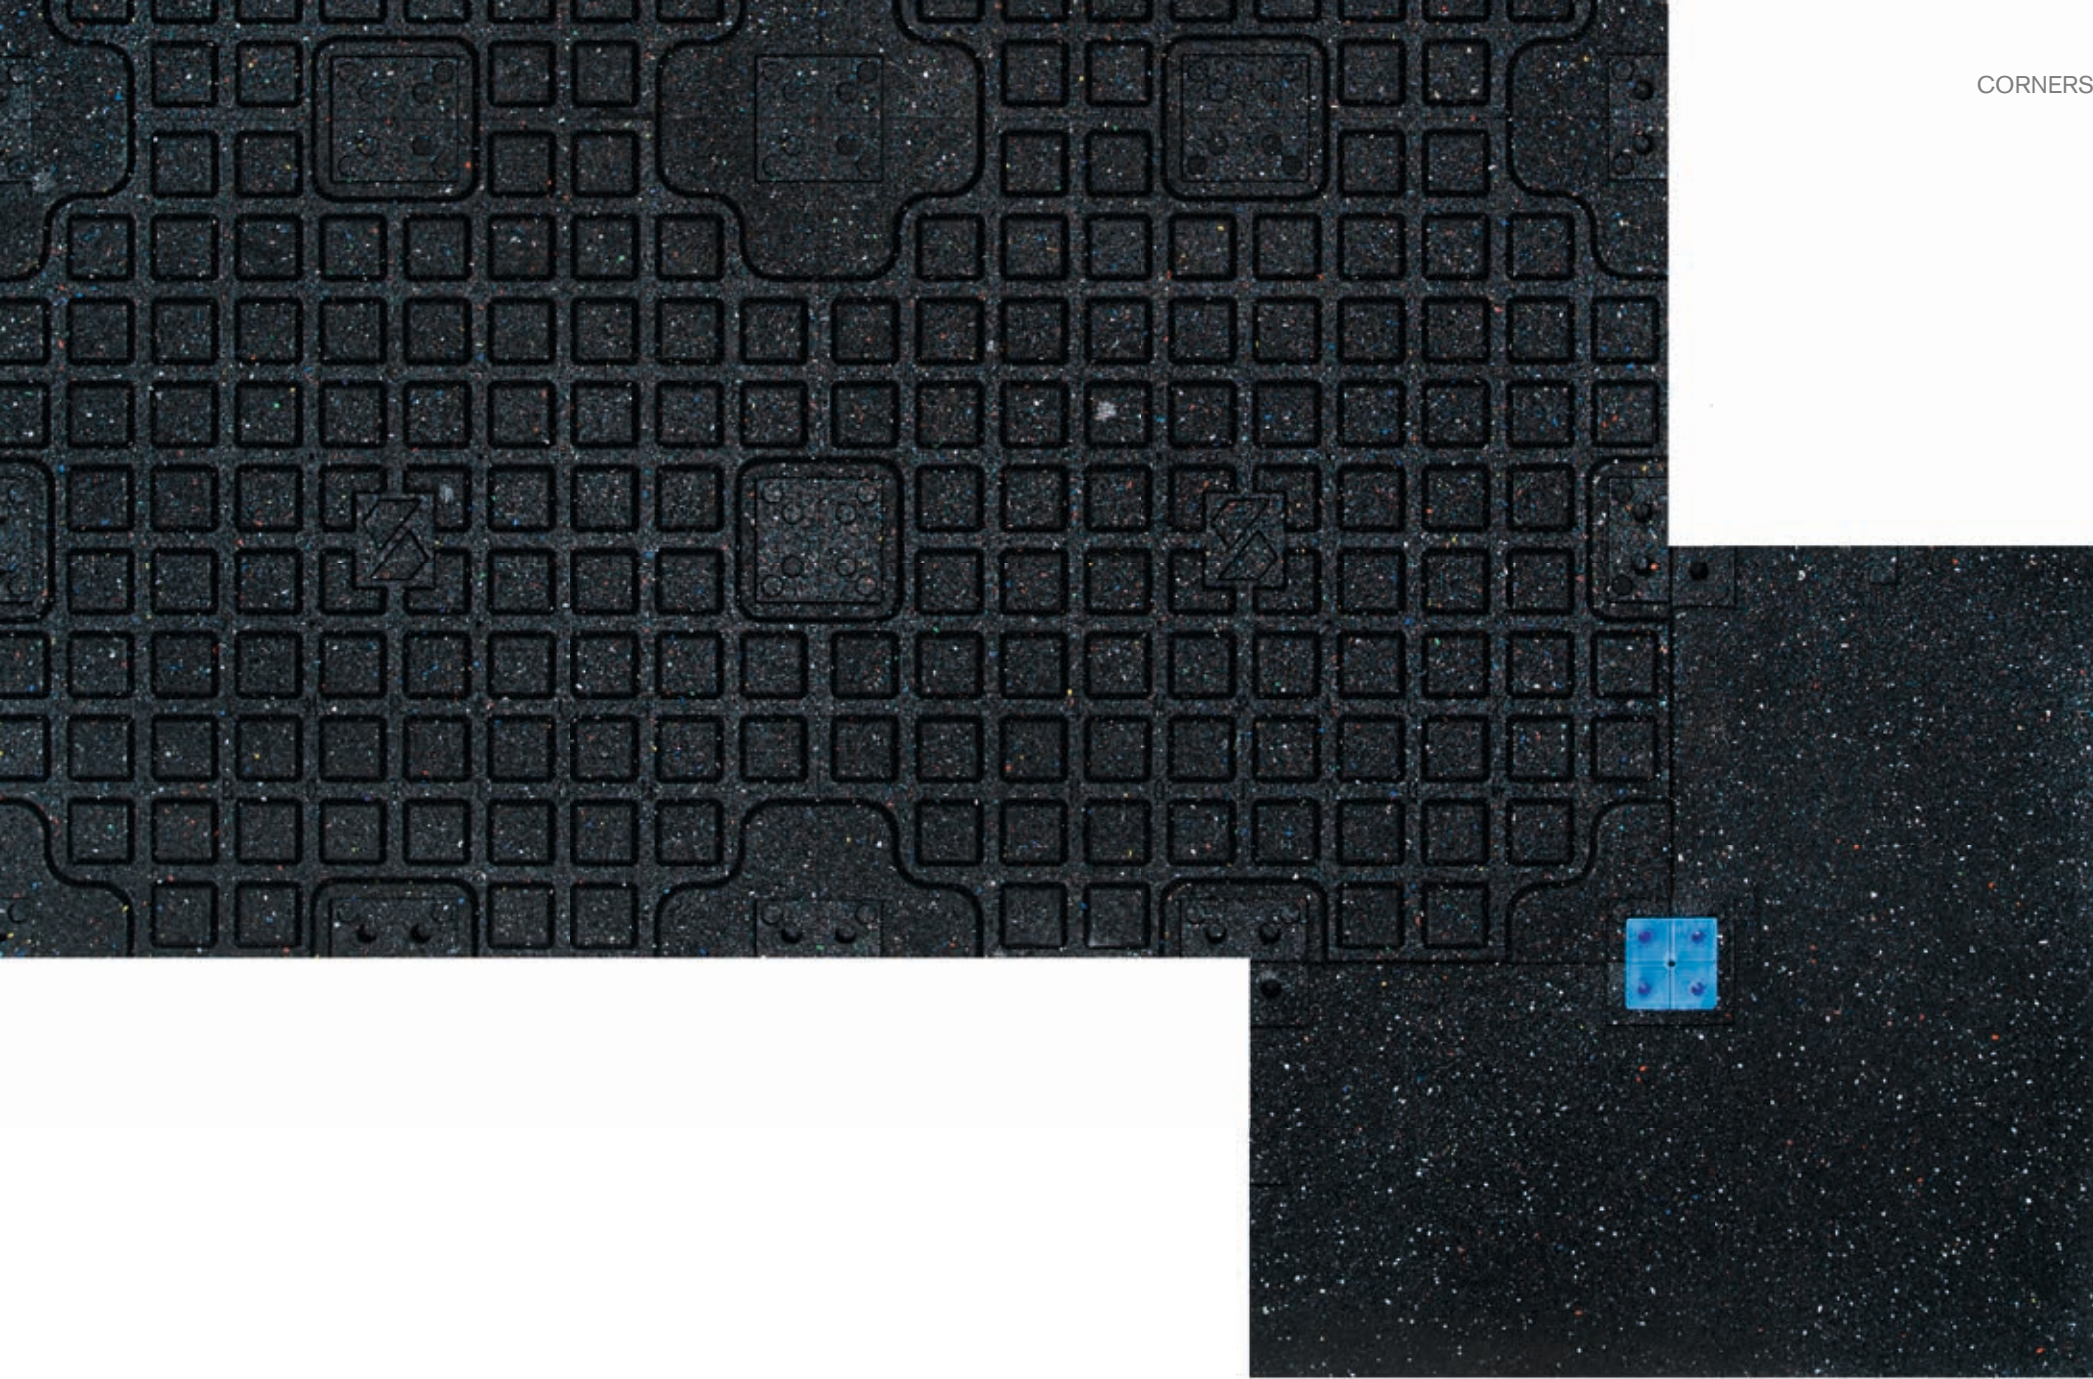

06. CORNERS











The Fitness Tile Connect CORNERS are available in **100% pure black** and with **15% coloured EPDM**.



SPECIFICATIONS

Bulk density toplayer	From approx. 1.050 kg/m³ up to 1.450 kg/m³	
Bulk density sublayer	Approx. 1.000 kg/m³	
Tolerances	+/- 1,5 %	
Sound insulation Certified Noise Reducing	20mm	21dB reduction
	30mm	24d dB reduction
	40mm	not specified
Shock Absorption	EN 14808	61%
Vertical deformation	EN 14809	5 mm
Head injury criteria (HIC) test	EN 1177	1,5 m at 50 mm thickness
EU fire classification	EF1	
Dynamic coefficient of friction	Dry slip resistance	
Thermal resistance	0,16 m². K/W	
Additional	Compliance with content of pentachlorophenol Antistatic floor covering	

COLOURS

Dimensions & Thickness

Dimension		500 x 500 mm					
20 mm							
		pure black	15% light grey	15% dark grey	15% blue	15% green	15% red
30 mm							
		15% yellow	stone	granite	beach	desert	
40 mm							
		100% pure black	15% light grey	15% dark grey	stone		
40 mm							
		100% pure black	15% light grey	stone	15% orange		

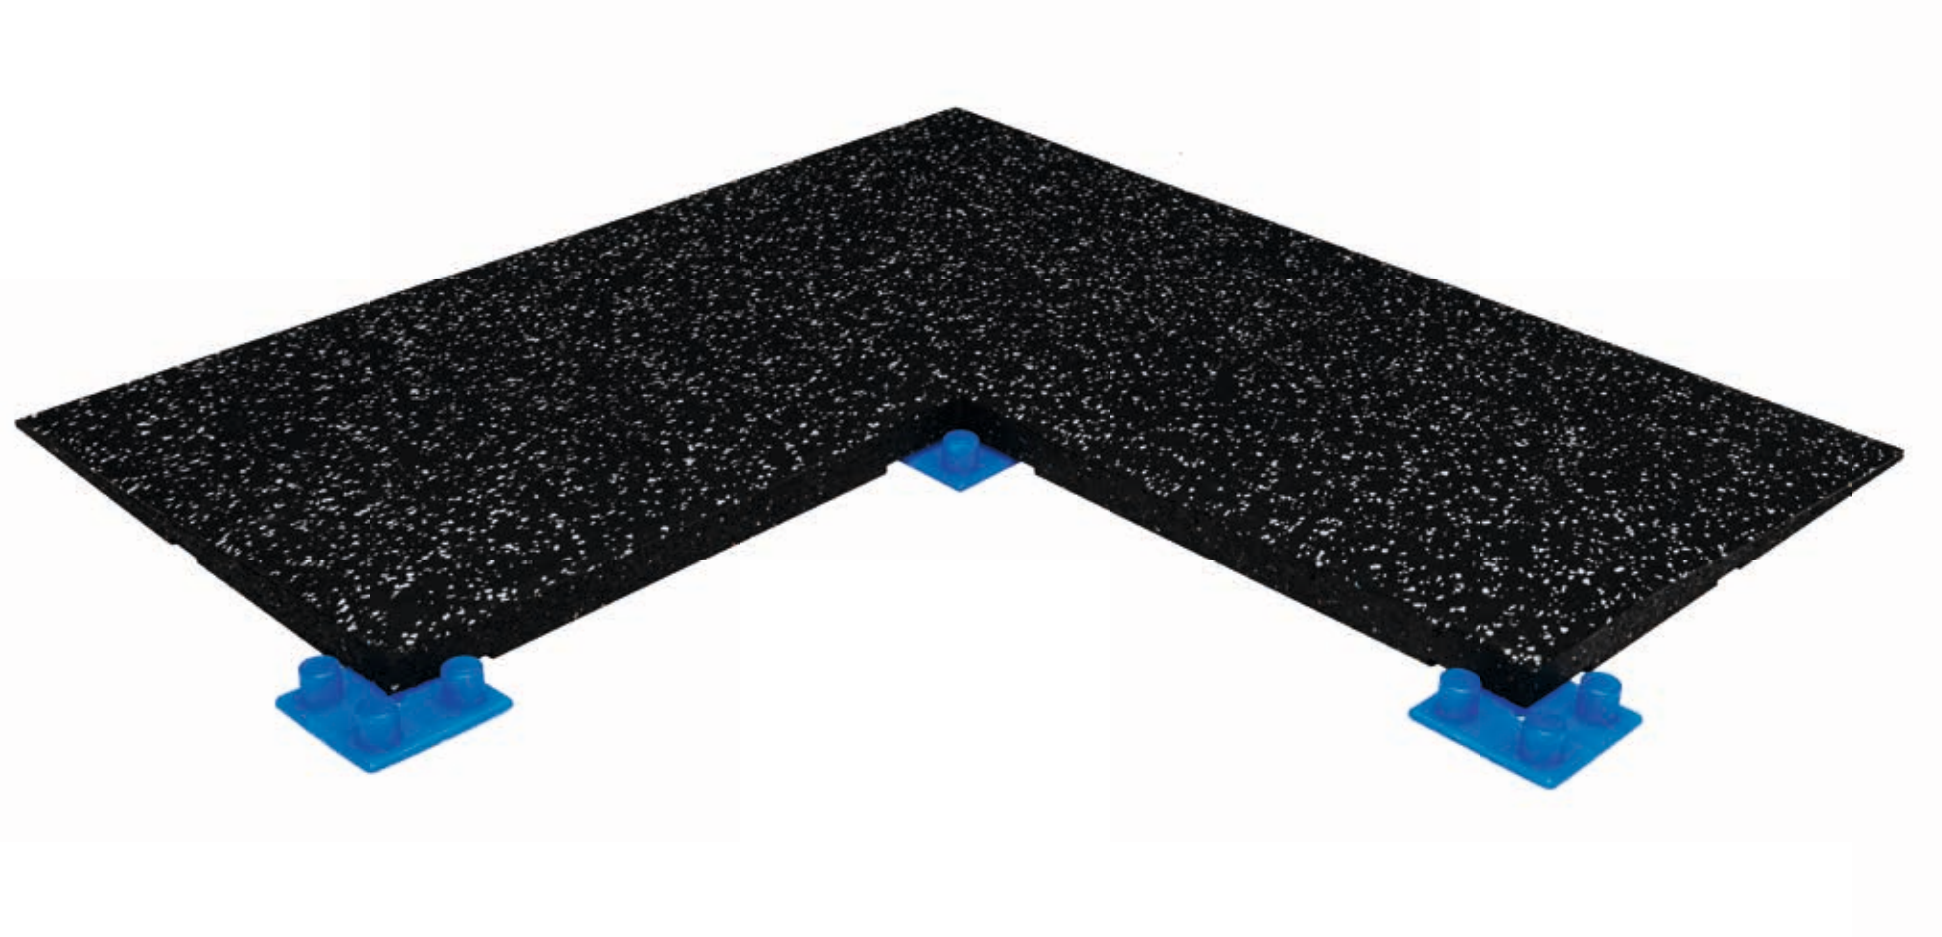



Evolve (Sweden)
100% pure black



THANK YOU