

VRUT11F




Flood Light **11mm Ultra-Thin Magnetic Track**



VRUT11F12W

CODE	VRUT11F12W
Dimension(mm)	231.3x22.2x33.3mm
System power (W)	12W
Input Voltage(V)	DC 48V
Light Source	Osram
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	85lm/w
CRI	Ra≥85
Beam Angle (°)	110°
LED Driver	External
Dimming Option	On-off / 1-10v / DAL / Triac
IP Rating	IP20
Product Colour	White ,Silver, Black
Materials	Aluminum 6063-T5,
Lifetime (hr)	50,000h
Operating Temp.	-20°C~+45°C

Code	CCT	COLOR
VRUT11F12WC3WH	3000K	White
VRUT11F12WC4WH	4000K	White
VRUT11F12WC3BL	3000K	Black
VRUT11F12WC4BL	4000K	Black
VRUT11F12WC3SI	3000K	Silver
VRUT11F12WC4SI	4000K	Silver

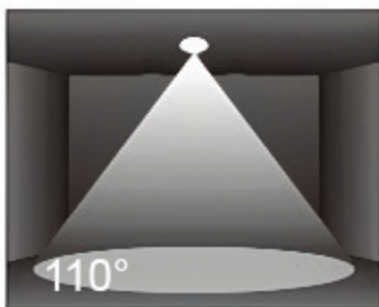




VRUT11F18W

CODE	VRUT11F18W
Dimension(mm)	345.2x22.2x33.3mm
System power (W)	18W
Input Voltage(V)	DC 48V
Light Source	Osram
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	85lm/w
CRI	Ra≥85
Beam Angle (°)	110°
LED Driver	External
Dimming Option	On-off / 1-10v / DAL / Triac
IP Rating	IP20
Product Colour	White ,Silver, Black
Materials	Aluminum 6063-T5,
Lifetime (hr)	50,000h
Operating Temp.	-20°C~+45°C

Code	CCT	COLOR
VRUT11F18WC3WH	3000K	White
VRUT11F18WC4WH	4000K	White
VRUT11F18WC3BL	3000K	Black
VRUT11F18WC4BL	4000K	Black
VRUT11F18WC3SI	3000K	Silver
VRUT11F18WC4SI	4000K	Silver

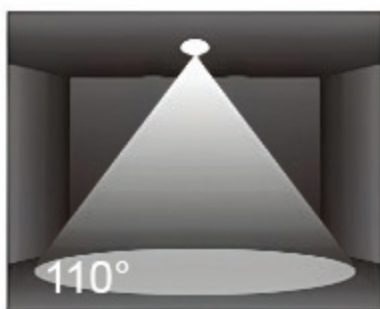

VRUT11G




Grille Light 11mm Ultra-Thin Magnetic Track



VRUT11G12W

CODE	VRUT11G12W
Dimension(mm)	231.3x22.2x33.3mm
System power (W)	12W
Input Voltage(V)	DC 48V
Light Source	Osram
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	85lm/w
CRI	Ra≥85
Beam Angle (°)	24°
LED Driver	External
Dimming Option	On-off / 1-10v / DAL / Triac
IP Rating	IP20
Product Colour	White ,Silver, Black
Materials	Aluminum 6063-T5,
Lifetime (hr)	50,000h
Operating Temp.	-20°C~+45°C

Code	CCT	COLOR
VRUT11G12WC3WH	3000K	White
VRUT11G12WC4WH	4000K	White
VRUT11G12WC3BL	3000K	Black
VRUT11G12WC4BL	4000K	Black
VRUT11G12WC3SI	3000K	Silver
VRUT11G12WC4SI	4000K	Silver

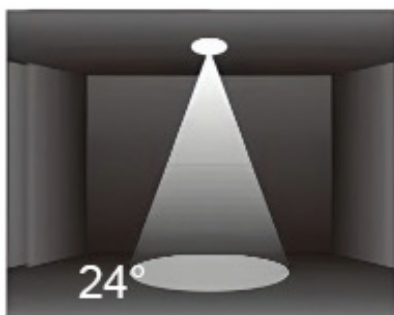




VRUT11G18W

CODE	VRUT11G18W
Dimension(mm)	345.2x22.2x33.3mm
System power (W)	18W
Input Voltage(V)	DC 48V
Light Source	Osram
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	85lm/w
CRI	Ra≥85
Beam Angle (°)	24°
LED Driver	External
Dimming Option	On-off / 1-10v / DAL / Triac
IP Rating	IP20
Product Colour	White ,Silver, Black
Materials	Aluminum 6063-T5,
Lifetime (hr)	50,000h
Operating Temp.	-20°C~+45°C


Code	CCT	COLOR
VRUT11G18WC3WH	3000K	White
VRUT11G18WC4WH	4000K	White
VRUT11G18WC3BL	3000K	Black
VRUT11G18WC4BL	4000K	Black
VRUT11G18WC3SI	3000K	Silver
VRUT11G18WC4SI	4000K	Silver

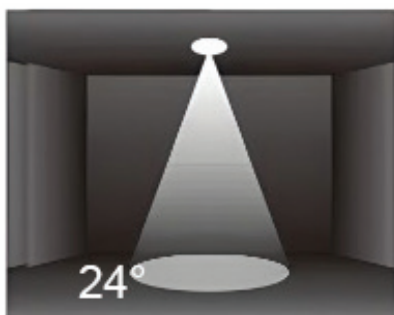

VRUT11G



Grille Light 11mm Ultra-Thin Magnetic Track

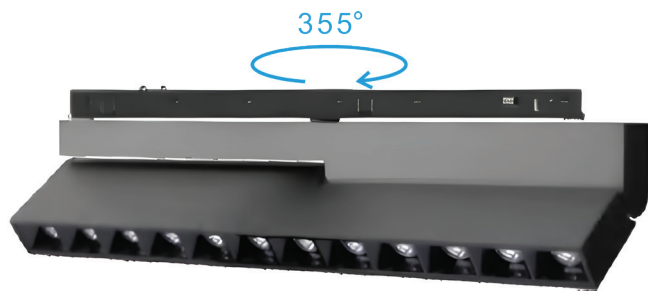

VRUT11GT

CODE	VRUT11GT12W
Dimension(mm)	230.6x15.6x64.9mm
System power (W)	12W
Input Voltage(V)	DC 48V
Light Source	Osram
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	85lm/w
CRI	Ra≥85
Beam Angle (°)	24°
LED Driver	External
Dimming Option	On-off / 1-10v / DAL / Triac
IP Rating	IP20
Product Colour	White ,Silver, Black
Materials	Aluminum 6063-T5,
Lifetime (hr)	50,000h
Operating Temp.	-20°C~+45°C

Code	CCT	COLOR
VRUT11GT12WC3WH	3000K	White
VRUT11GT12WC4WH	4000K	White
VRUT11GT12WC3BL	3000K	Black
VRUT11GT12WC4BL	4000K	Black
VRUT11GT12WC3SI	3000K	Silver
VRUT11GT12WC4SI	4000K	Silver

