

VRUT11S




Spot Light 11mm Ultra-Thin Magnetic Track



VRUT11S5W

CODE	VRUT11S5W
Dimension(mm)	Φ30.5*57
System power (W)	5W
Input Voltage(V)	DC 48V
Light Source	Osram
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	85lm/w
CRI	Ra≥85
Beam Angle (°)	24°
LED Driver	External
Dimming Option	On-off / 1-10v / DAL / Triac
IP Rating	IP20
Product Colour	White ,Silver, Black
Materials	Aluminum 6063-T5,
Lifetime (hr)	50,000h
Operating Temp.	-20°C~+45°C

Code	CCT	COLOR
VRUT11S5WC3WH	3000K	White
VRUT11S5WC4WH	4000K	White
VRUT11S5WC3BL	3000K	Black
VRUT11S5WC4BL	4000K	Black
VRUT11S5WC3SI	3000K	Silver
VRUT11S5WC4SI	4000K	Silver

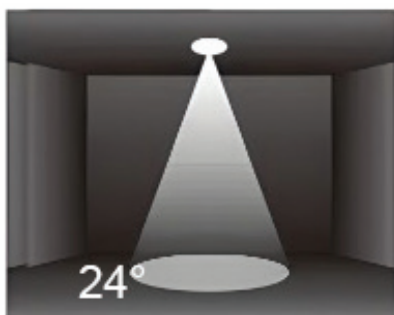




VRUT11S8W

CODE	VRUT11S8W
Dimension(mm)	Φ40.5*57
System power (W)	8W
Input Voltage(V)	DC 48V
Light Source	Osram
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	85lm/w
CRI	Ra≥85
Beam Angle (°)	24°
LED Driver	External
Dimming Option	On-off / 1-10v / DAL / Triac
IP Rating	IP20
Product Colour	White ,Silver, Black
Materials	Aluminum 6063-T5,
Lifetime (hr)	50,000h
Operating Temp.	-20°C~+45°C

Code	CCT	COLOR
VRUT11S8WC3WH	3000K	White
VRUT11S8WC4WH	4000K	White
VRUT11S8WC3BL	3000K	Black
VRUT11S8WC4BL	4000K	Black
VRUT11S8WC3SI	3000K	Silver
VRUT11S8WC4SI	4000K	Silver

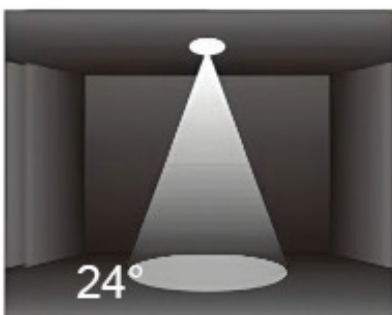



VRUT11S12W

CODE	VRUT11S12W
Dimension(mm)	Φ50.5*57
System power (W)	12W
Input Voltage(V)	DC 48V
Light Source	Osram
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	85lm/w
CRI	Ra≥85
Beam Angle (°)	24°
LED Driver	External
Dimming Option	On-off / 1-10v / DAL / Triac
IP Rating	IP20
Product Colour	White ,Silver, Black
Materials	Aluminum 6063-T5,
Lifetime (hr)	50,000h
Operating Temp.	-20°C~+45°C

Code	CCT	COLOR
VRUT11S12WC3WH	3000K	White
VRUT11S12WC4WH	4000K	White
VRUT11S12WC3BL	3000K	Black
VRUT11S12WC4BL	4000K	Black
VRUT11S12WC3SI	3000K	Silver
VRUT11S12WC4SI	4000K	Silver

