


VR312






Recessed Downlight

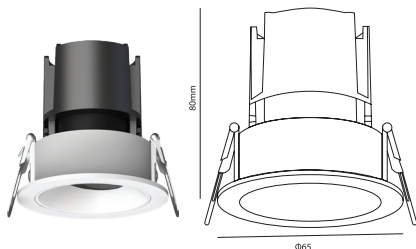


VR3127W

CODE	VR3127W
Dimension(mm)	Φ65x80mm
Cutout (mm)	Φ55mm
System power (W)	7W
Input Voltage(V)	220-240VAC 50/60Hz
Light Source	Osram COB
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	140 lm/W
CRI	Ra>80
Beam Angle (°)	15°/24°/38°/55°
LED Driver	External LED drivers: constant-current
Dimming Option	On-off / 1-10v / Triac / Dali
UGR	<19
IP Rating	IP20
Product Colour	Black
Front Ring Colour	Matt Black / Matt White / Silver
Materials	Aluminum Die-casting
Lifetime (hr)	50,000h
Operating Temp.	-20°~50°

	CCT	BEAM
VR3127WC3B15	3000K	15°
VR3127WC4B15	4000K	15°
VR3127WC3B24	3000K	24°
VR3127WC4B24	4000K	24°
VR3127WC3B38	3000K	38°
VR3127WC4B38	4000K	38°
VR3127WC3B55	3000K	55°
VR3127WC4B55	4000K	55°






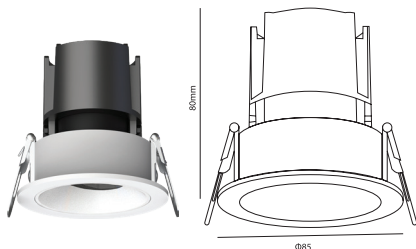


VR31210W

CODE	VR31210W
Dimension(mm)	Φ85x80mm
Cutout (mm)	Φ75mm
System power (W)	9W
Input Voltage(V)	220-240VAC 50/60Hz
Light Source	Osram COB
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	140 lm/W
CRI	Ra>80
Beam Angle (°)	15°/24°/38°/55°
LED Driver	External LED drivers: constant-current
Dimming Option	On-off / 1-10v / Triac / Dali
UGR	<19
IP Rating	IP20
Product Colour	Black
Front Ring Colour	Matt Black / Matt White / Silver
Materials	Aluminum Die-casting
Lifetime (hr)	50,000h
Operating Temp.	-20°~50°

	CCT	BEAM
VR31210WC3B15	3000K	15°
VR31210WC4B15	4000K	15°
VR31210WC3B24	3000K	24°
VR31210WC4B24	4000K	24°
VR31210WC3B38	3000K	38°
VR31210WC4B38	4000K	38°
VR31210WC3B55	3000K	55°
VR31210WC4B55	4000K	55°






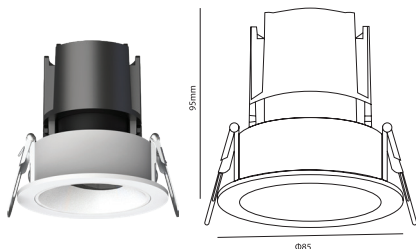


VR31218W

CODE	VR31218W
Dimension(mm)	Φ85x95mm
Cutout (mm)	Φ75mm
System power (W)	18W
Input Voltage(V)	220-240VAC 50/60Hz
Light Source	Osram COB
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	140 lm/W
CRI	Ra>80
Beam Angle (°)	15°/24°/38°/55°
LED Driver	External LED drivers: constant-current
Dimming Option	On-off / 1-10v / Triac / Dali
UGR	<19
IP Rating	IP20
Product Colour	Black
Front Ring Colour	Matt Black / Matt White / Silver
Materials	Aluminum Die-casting
Lifetime (hr)	50,000h
Operating Temp.	-20°~50°

	CCT	BEAM
VR31218WC3B15	3000K	15°
VR31218WC4B15	4000K	15°
VR31218WC3B24	3000K	24°
VR31218WC4B24	4000K	24°
VR31218WC3B38	3000K	38°
VR31218WC4B38	4000K	38°
VR31218WC3B55	3000K	55°
VR31218WC4B55	4000K	55°



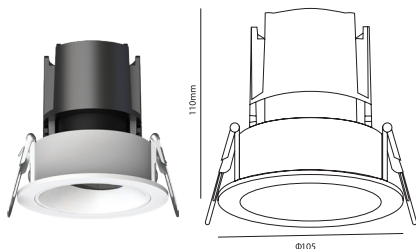

VR31221W

CODE	VR31221W
Dimension(mm)	Φ105x110mm
Cutout (mm)	Φ95mm
System power (W)	21.6W
Input Voltage(V)	220-240VAC 50/60Hz
Light Source	Osram COB
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	140 lm/W
CRI	Ra>80
Beam Angle (°)	15°/24°/38°/55°
LED Driver	External LED drivers: constant-current
Dimming Option	On-off / 1-10v / Triac / Dali
UGR	<19
IP Rating	IP20
Product Colour	Black
Front Ring Colour	Matt Black / Matt White / Silver
Materials	Aluminum Die-casting
Lifetime (hr)	50,000h
Operating Temp.	-20°~50°

	CCT	BEAM
VR31221WC3B15	3000K	15°
VR31221WC4B15	4000K	15°
VR31221WC3B24	3000K	24°
VR31221WC4B24	4000K	24°
VR31221WC3B38	3000K	38°
VR31221WC4B38	4000K	38°
VR31221WC3B55	3000K	55°
VR31221WC4B55	4000K	55°

