

INSTALLATION MANUAL

VR312S2 TILTABLE RECESSED DOWNLIGHT

VR312S27W
2X7W
220-240VAC
IP20

VR312S210W
2X10W
220-240VAC
IP20

VR312S218W
2X18W
220-240VAC
IP20


IP20

50000 HOURS







CRI ≥ 80

RoHS

CE



VR312S27W VR312S210W VR312S218W

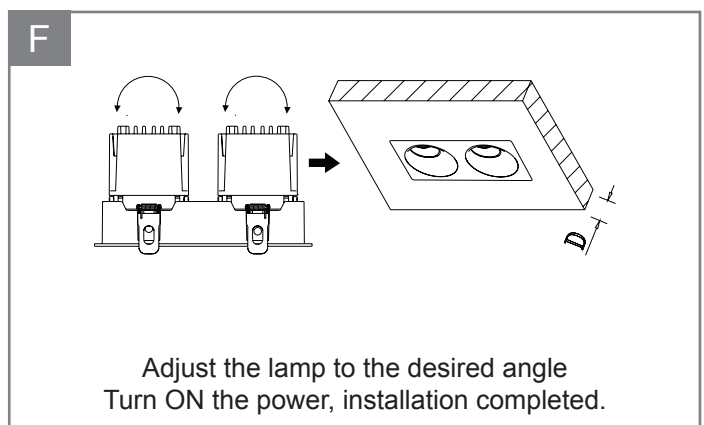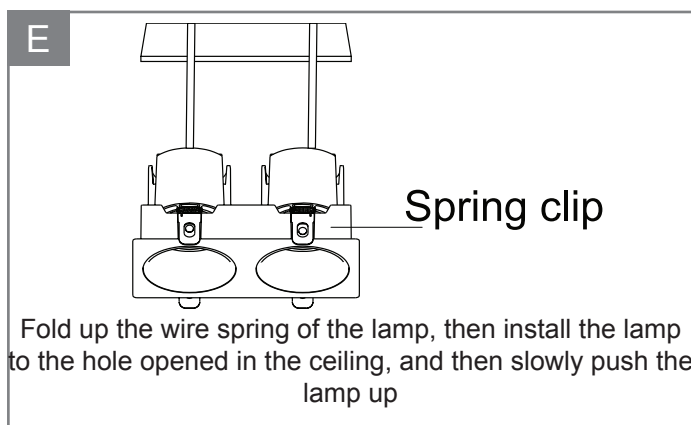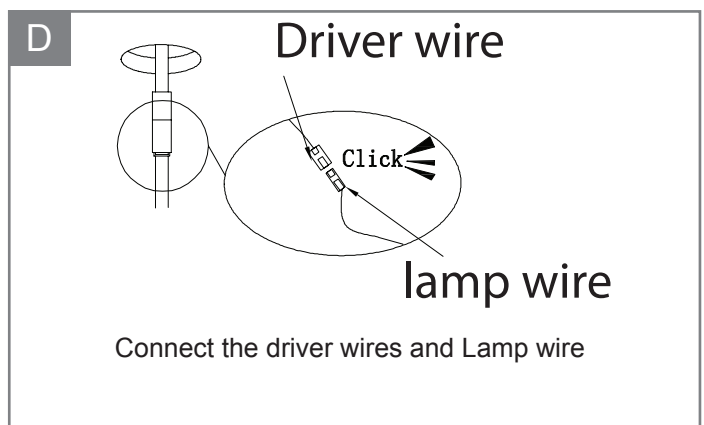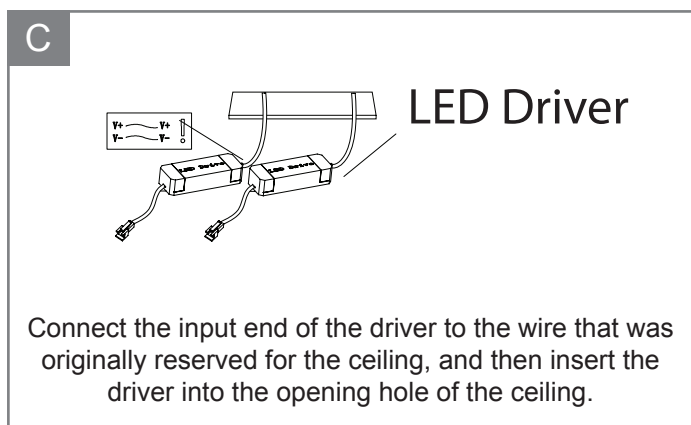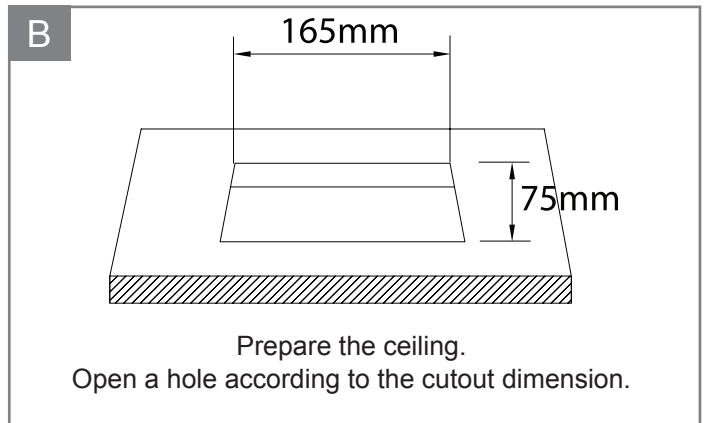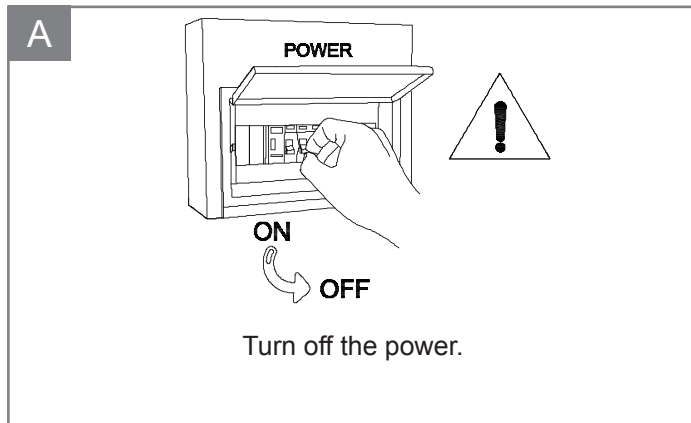

- Always disconnect the power supply before installing or performing any maintenance operations.
- Installation should be carried out by a suitably qualified person in accordance with good electrical practice and the appropriate national wiring regulations.
- These luminaires are widely used in commercial lighting, home decoration lighting, art gallery and museums.
- Only can be touched after 3 minutes later when power off, so as to avoid burns.
- Dismantling and refit are forbidden
- Installation on inflammables is forbidden.

If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.