





VR312S3 Tilttable

Recessed Downlight



CODE	VR312S37W	VR312S310W	VR312S318W
Dimension(mm)	255x85x80mm	255x85x80mm	255x85x95mm
Cutout (mm)	250x75mm	250x75mm	250x75mm
System power (W)	3x7W	3x10W	3x18W
Input Voltage(V)	220-240VAC 50/60Hz		
Light Source	Osram COB		
SDCM	<5		
CCT(K)	3000K/4000K standard. Different CCT upon request.		
Luminous (lm) ±5%	140 lm/W		
CRI	Ra>80		
Beam Angle (°)	15°/24°/38°/55°		
LED Driver	External LED driver		
Dimming Option	On-off / 1-10v / Triac / Dali		
UGR	<19		
IP Rating	IP20		
Product Colour	Black		
Baffle Colour	Matt Black / Matt White / Silver		
Materials	Aluminum Die-casting		
Lifetime (hr)	50,000h		
Operating Temp.	-20°~50°		

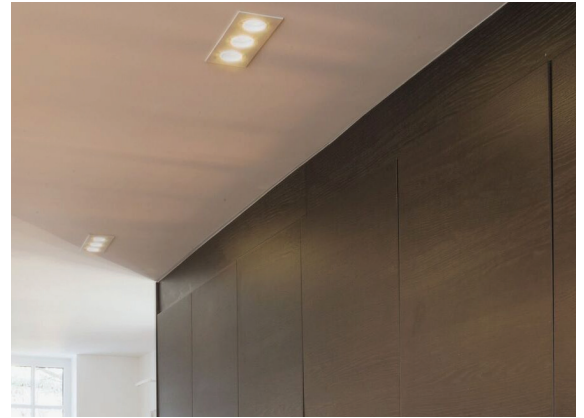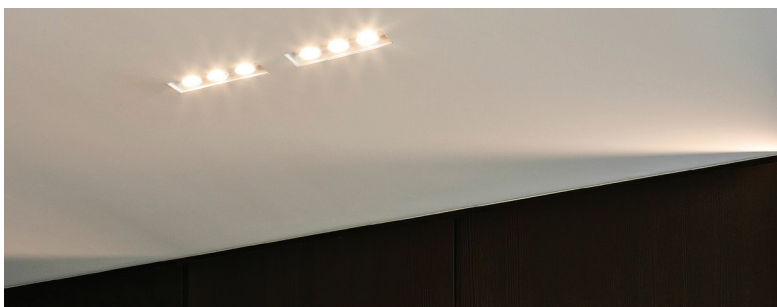

Matt White Baffle Matt Black Baffle Silver Baffle

Code	VR312S37W	
	CCT	BEAM
VR312S37WC3B15	3000K	15°
VR312S37WC4B15	4000K	15°
VR312S37WC3B24	3000K	24°
VR312S37WC4B24	4000K	24°
VR312S37WC3B38	3000K	38°
VR312S37WC4B38	4000K	38°
VR312S37WC3B55	3000K	55°
VR312S37WC4B55	4000K	55°

Code	VR312S310W	
	CCT	BEAM
VR312S310WC3B15	3000K	15°
VR312S310WC4B15	4000K	15°
VR312S310WC3B24	3000K	24°
VR312S310WC4B24	4000K	24°
VR312S310WC3B38	3000K	38°
VR312S310WC4B38	4000K	38°
VR312S310WC3B55	3000K	55°
VR312S310WC4B55	4000K	55°

Code	VR312S318W	
	CCT	BEAM
VR312S318WC3B15	3000K	15°
VR312S318WC4B15	4000K	15°
VR312S318WC3B24	3000K	24°
VR312S318WC4B24	4000K	24°
VR312S318WC3B38	3000K	38°
VR312S318WC4B38	4000K	38°
VR312S318WC3B55	3000K	55°
VR312S318WC4B55	4000K	55°