



VR312S3

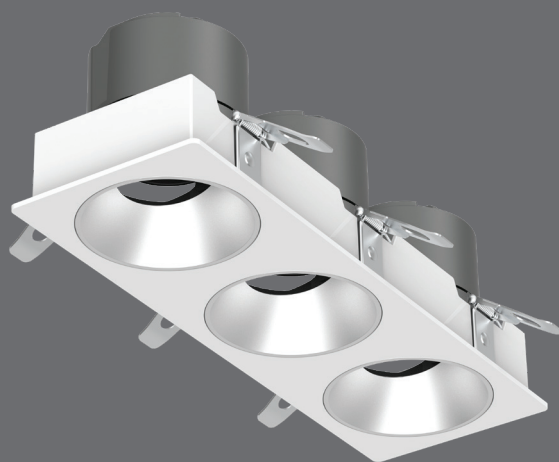



Recessed Downlight

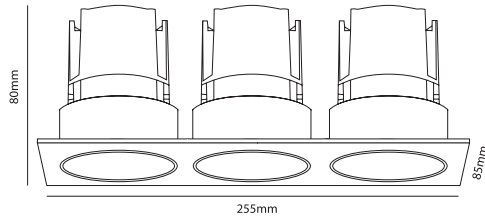


VR312S37W

CODE	VR312S37W
Dimension(mm)	255x85x80mm
Cutout (mm)	250x75mm
System power (W)	3x7W
Input Voltage(V)	220-240VAC 50/60Hz
Light Source	Osram COB
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	140 lm/W
CRI	Ra>80
Beam Angle (°)	15°/24°/38°/55°
LED Driver	External LED drivers: constant-current
Dimming Option	On-off / 1-10v / Triac / Dali
UGR	<19
IP Rating	IP20
Product Colour	Black
Front Ring Colour	Matt Black / Matt White / Silver
Materials	Aluminum Die-casting
Lifetime (hr)	50,000h
Operating Temp.	-20°~50°

Code	CCT	BEAM
VR312S37WC3B15	3000K	15°
VR312S37WC4B15	4000K	15°
VR312S37WC3B24	3000K	24°
VR312S37WC4B24	4000K	24°
VR312S37WC3B38	3000K	38°
VR312S37WC4B38	4000K	38°
VR312S37WC3B55	3000K	55°
VR312S37WC4B55	4000K	55°






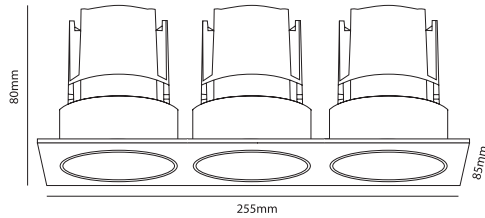


VR312S310W

CODE	VR312S310W
Dimension(mm)	255x85x80mm
Cutout (mm)	250x75mm
System power (W)	3x10W
Input Voltage(V)	220-240VAC 50/60Hz
Light Source	Osram COB
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	140 lm/W
CRI	Ra>80
Beam Angle (°)	15°/24°/38°/55°
LED Driver	External LED drivers: constant-current
Dimming Option	On-off / 1-10v / Triac / Dali
UGR	<19
IP Rating	IP20
Product Colour	Black
Front Ring Colour	Matt Black / Matt White / Silver
Materials	Aluminum Die-casting
Lifetime (hr)	50,000h
Operating Temp.	-20°~50°

Code	CCT	BEAM
VR312S310WC3B15	3000K	15°
VR312S310WC4B15	4000K	15°
VR312S310WC3B24	3000K	24°
VR312S310WC4B24	4000K	24°
VR312S310WC3B38	3000K	38°
VR312S310WC4B38	4000K	38°
VR312S310WC3B55	3000K	55°
VR312S310WC4B55	4000K	55°



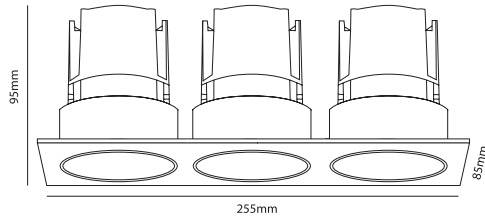

VR312S318W

CODE	VR312S318W
Dimension(mm)	255x85x95mm
Cutout (mm)	250x75mm
System power (W)	3x18W
Input Voltage(V)	220-240VAC 50/60Hz
Light Source	Osram COB
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	140 lm/W
CRI	Ra>80
Beam Angle (°)	15°/24°/38°/55°
LED Driver	External LED drivers: constant-current
Dimming Option	On-off / 1-10v / Triac / Dali
UGR	<19
IP Rating	IP20
Product Colour	Black
Front Ring Colour	Matt Black / Matt White / Silver
Materials	Aluminum Die-casting
Lifetime (hr)	50,000h
Operating Temp.	-20°~50°

Code	CCT	BEAM
VR312S318WC3B15	3000K	15°
VR312S318WC4B15	4000K	15°
VR312S318WC3B24	3000K	24°
VR312S318WC4B24	4000K	24°
VR312S318WC3B38	3000K	38°
VR312S318WC4B38	4000K	38°
VR312S318WC3B55	3000K	55°
VR312S318WC4B55	4000K	55°

