





VR312S4 Tilttable Recessed Downlight

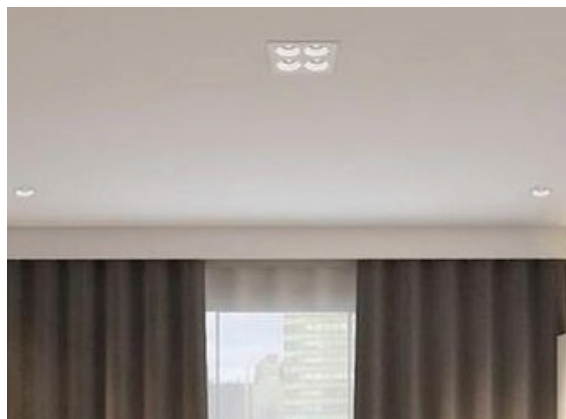

CODE	VR312S47W	VR312S410W	VR312S418W
Dimension(mm)	170x170x80mm	170x170x80mm	170x170x95mm
Cutout (mm)	165x165mm	165x165mm	165x165mm
System power (W)	4x7W	4x10W	4x18W
Input Voltage(V)	220-240VAC 50/60Hz		
Light Source	Osram COB		
SDCM	<5		
CCT(K)	3000K/4000K standard. Different CCT upon request.		
Luminous (lm) ±5%	140 lm/W		
CRI	Ra>80		
Beam Angle (°)	15°/24°/38°/55°		
LED Driver	External LED driver		
Dimming Option	On-off / 1-10v / Triac / Dali		
UGR	<19		
IP Rating	IP20		
Product Colour	Black		
Baffle Colour	Matt Black / Matt White / Silver		
Materials	Aluminum Die-casting		
Lifetime (hr)	50,000h		
Operating Temp.	-20°~50°		

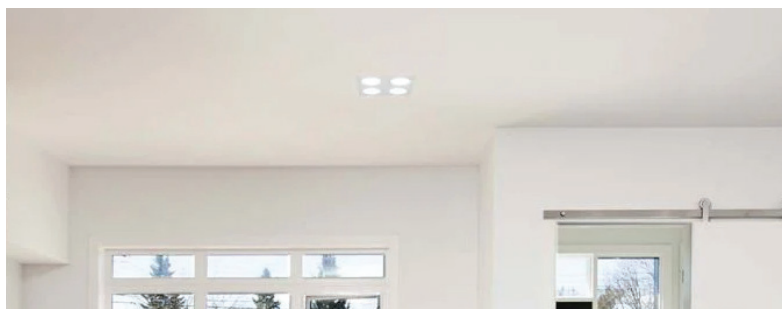

Matt White Baffle Matt Black Baffle Sliver Baffle

Code	VR312S47W	
	CCT	BEAM
VR312S47WC3B15	3000K	15°
VR312S47WC4B15	4000K	15°
VR312S47WC3B24	3000K	24°
VR312S47WC4B24	4000K	24°
VR312S47WC3B38	3000K	38°
VR312S47WC4B38	4000K	38°
VR312S47WC3B55	3000K	55°
VR312S47WC4B55	4000K	55°

Code	VR312S410W	
	CCT	BEAM
VR312S410WC3B15	3000K	15°
VR312S410WC4B15	4000K	15°
VR312S410WC3B24	3000K	24°
VR312S410WC4B24	4000K	24°
VR312S410WC3B38	3000K	38°
VR312S410WC4B38	4000K	38°
VR312S410WC3B55	3000K	55°
VR312S410WC4B55	4000K	55°

Code	VR312S418W	
	CCT	BEAM
VR312S418WC3B15	3000K	15°
VR312S418WC4B15	4000K	15°
VR312S418WC3B24	3000K	24°
VR312S418WC4B24	4000K	24°
VR312S418WC3B38	3000K	38°
VR312S418WC4B38	4000K	38°
VR312S418WC3B55	3000K	55°
VR312S418WC4B55	4000K	55°