INSTALLATION MANUAL

VR312S4 TILTABLE RECESSED DOWNLIGHT

VR312S47W	VR312S410W	VR312S418W
4X7W	4X10W	4X18W
220-240VAC	220-240VAC	220-240VAC
IP20	IP20	IP20

IP20 | 50000 HOURS | CRI≥80 | RoHS | CE



VR312S47W VR312S410W VR312S418W

VIRMA LIGHTING

A

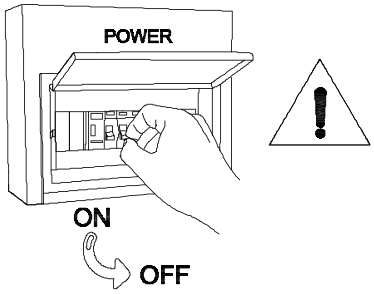

Turn off the power.

B

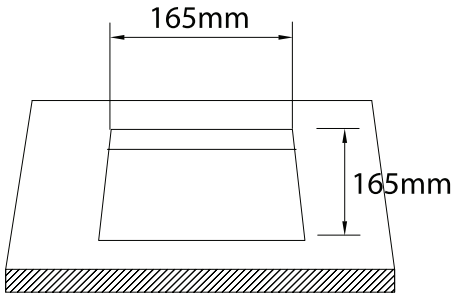

Prepare the ceiling.
Open a hole according to the cutout dimension.

C

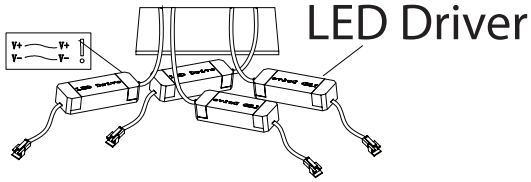

Connect the input end of the driver to the wire that was originally reserved for the ceiling, and then insert the driver into the opening hole of the ceiling.

D

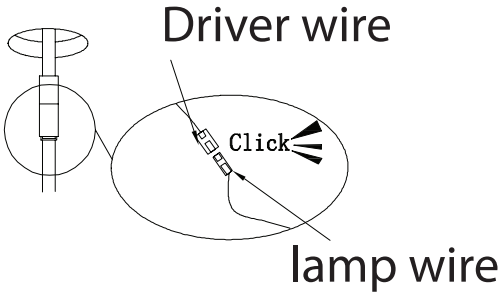

Connect the driver wires and Lamp wire

E

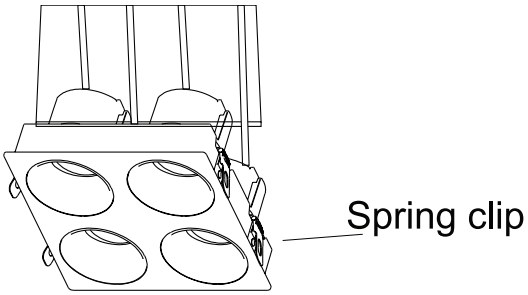

Fold up the wire spring of the lamp, then install the lamp to the hole opened in the ceiling, and then slowly push the lamp up

F

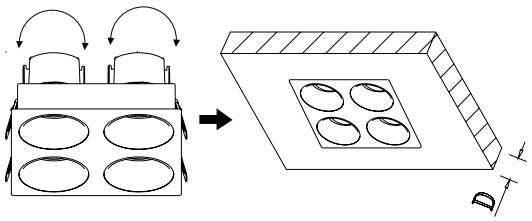

Adjust the lamp to the desired angle
Turn ON the power, installation completed.

- Always disconnect the power supply before installing or performing any maintenance operations.
- Installation should be carried out by a suitably qualified person in accordance with good electrical practice and the appropriate national wiring regulations.
- These luminaires are widely used in commercial lighting, home decoration lighting, art gallery and museums.
- Only can be touched after 3 minutes later when power off, so as to avoid burns.
- Dismantling and refit are forbidden
- Installation on inflammables is forbidden.

If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.