



## VR390S Fixed Trimless Downlight



Matt White Baffle

Matt Black Baffle


Sliver Baffle



| CODE              | VR390S5W                                          | VR390S8W |
|-------------------|---------------------------------------------------|----------|
| Dimension(mm)     | Φ74x70mm                                          |          |
| Cutout (mm)       | Φ55mm                                             |          |
| System power (W)  | 5W                                                | 8W       |
| Input Voltage(V)  | 220-240VAC 50/60Hz                                |          |
| Light Source      | Osram COB                                         |          |
| SDCM              | <5                                                |          |
| CCT(K)            | 3000K/4000K standard. Different CCT upon request. |          |
| Luminous (lm) ±5% | 140 lm/W                                          |          |
| CRI               | Ra>80                                             |          |
| Beam Angle (°)    | 8°/15°/24°/38°/55°                                |          |
| LED Driver        | External LED driver                               |          |
| Dimming Option    | On-off / 1-10v / Triac / Dali                     |          |
| UGR               | <19                                               |          |
| IP Rating         | IP20                                              |          |
| Product Colour    | Black                                             |          |
| Baffle Colour     | Matt Black / Matt White / Silver                  |          |
| Materials         | Aluminum Die-casting                              |          |
| Lifetime (hr)     | 50,000h                                           |          |
| Operating Temp.   | -20°~50°                                          |          |

| Code          | VR390S5W |      |
|---------------|----------|------|
|               | CCT      | BEAM |
| VR390S5WC3B8  | 3000K    | 8°   |
| VR390S5WC4B8  | 4000K    | 8°   |
| VR390S5WC3B15 | 3000K    | 15°  |
| VR390S5WC4B15 | 4000K    | 15°  |
| VR390S5WC3B24 | 3000K    | 24°  |
| VR390S5WC4B24 | 4000K    | 24°  |
| VR390S5WC3B38 | 3000K    | 38°  |
| VR390S5WC4B38 | 4000K    | 38°  |
| VR390S5WC3B55 | 3000K    | 55°  |
| VR390S5WC4B55 | 4000K    | 55°  |

| Code          | VR390S8W |      |
|---------------|----------|------|
|               | CCT      | BEAM |
| VR390S8WC3B8  | 3000K    | 8°   |
| VR390S8WC4B8  | 4000K    | 8°   |
| VR390S8WC3B15 | 3000K    | 15°  |
| VR390S8WC4B15 | 4000K    | 15°  |
| VR390S8WC3B24 | 3000K    | 24°  |
| VR390S8WC4B24 | 4000K    | 24°  |
| VR390S8WC3B38 | 3000K    | 38°  |
| VR390S8WC4B38 | 4000K    | 38°  |
| VR390S8WC3B55 | 3000K    | 55°  |
| VR390S8WC4B55 | 4000K    | 55°  |

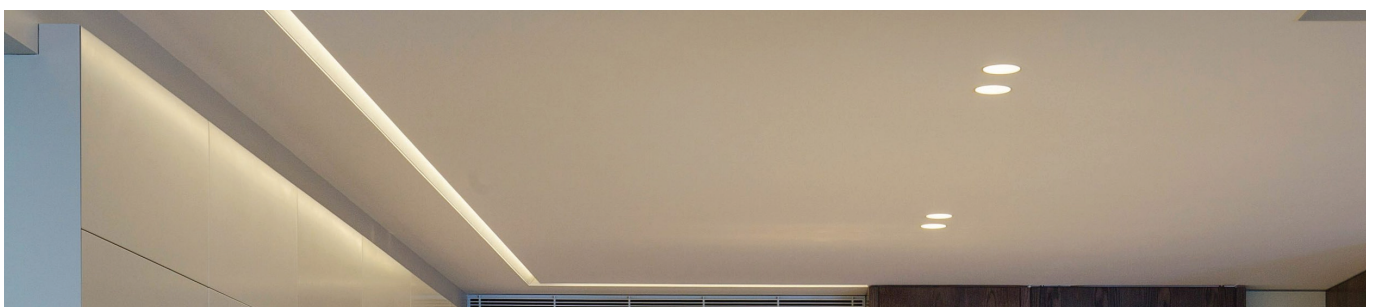



## VR390M Fixed Trimless Downlight




| CODE              | VR390M10W                                         | VR390M18W |
|-------------------|---------------------------------------------------|-----------|
| Dimension(mm)     | Φ99x80mm                                          |           |
| Cutout (mm)       | Φ75mm                                             |           |
| System power (W)  | 10W                                               | 18W       |
| Input Voltage(V)  | 220-240VAC 50/60Hz                                |           |
| Light Source      | Osram COB                                         |           |
| SDCM              | <5                                                |           |
| CCT(K)            | 3000K/4000K standard. Different CCT upon request. |           |
| Luminous (lm) ±5% | 140 lm/W                                          |           |
| CRI               | Ra>80                                             |           |
| Beam Angle (°)    | 8°/15°/24°/38°/55°                                |           |
| LED Driver        | External LED driver                               |           |
| Dimming Option    | On-off / 1-10v / Triac / Dali                     |           |
| UGR               | <19                                               |           |
| IP Rating         | IP20                                              |           |
| Product Colour    | Black                                             |           |
| Baffle Colour     | Matt Black / Matt White / Silver                  |           |
| Materials         | Aluminum Die-casting                              |           |
| Lifetime (hr)     | 50,000h                                           |           |
| Operating Temp.   | -20°~50°                                          |           |



Matt White Baffle    Matt Black Baffle    Silver Baffle

| Code           | VR390M10W |      |
|----------------|-----------|------|
|                | CCT       | BEAM |
| VR390M10WC3B8  | 3000K     | 8°   |
| VR390M10WC4B8  | 4000K     | 8°   |
| VR390M10WC3B15 | 3000K     | 15°  |
| VR390M10WC4B15 | 4000K     | 15°  |
| VR390M10WC3B24 | 3000K     | 24°  |
| VR390M10WC4B24 | 4000K     | 24°  |
| VR390M10WC3B38 | 3000K     | 38°  |
| VR390M10WC4B38 | 4000K     | 38°  |
| VR390M10WC3B55 | 3000K     | 55°  |
| VR390M10WC4B55 | 4000K     | 55°  |

| Code           | VR390M18W |      |
|----------------|-----------|------|
|                | CCT       | BEAM |
| VR390M18WC3B8  | 3000K     | 8°   |
| VR390M18WC4B8  | 4000K     | 8°   |
| VR390M18WC3B15 | 3000K     | 15°  |
| VR390M18WC4B15 | 4000K     | 15°  |
| VR390M18WC3B24 | 3000K     | 24°  |
| VR390M18WC4B24 | 4000K     | 24°  |
| VR390M18WC3B38 | 3000K     | 38°  |
| VR390M18WC4B38 | 4000K     | 38°  |
| VR390M18WC3B55 | 3000K     | 55°  |
| VR390M18WC4B55 | 4000K     | 55°  |

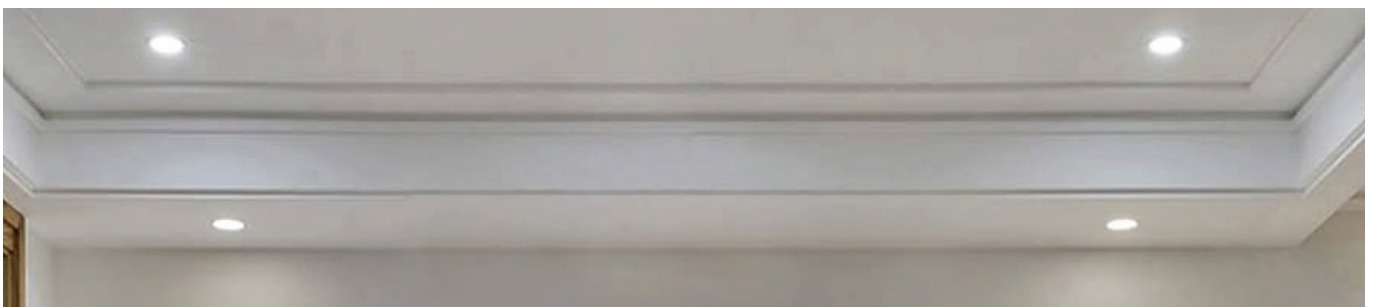

Downlight

# Trimless Downlight


Seamless Aesthetic,  
Fixed Trimless  
Downlight.

The perfect lighting  
solution for modern and  
minimalist interiors





## VR390L Fixed Trimless Downlight

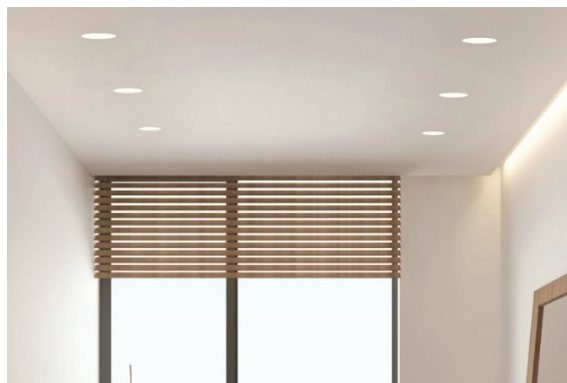

Matt White Baffle    Matt Black Baffle    Silver Baffle



| CODE              | VR390L18W                                         | VR390L24W |
|-------------------|---------------------------------------------------|-----------|
| Dimension(mm)     | Φ114x100mm                                        |           |
| Cutout (mm)       | Φ95mm                                             |           |
| System power (W)  | 18W                                               | 24.5W     |
| Input Voltage(V)  | 220-240VAC 50/60Hz                                |           |
| Light Source      | Osram COB                                         |           |
| SDCM              | <5                                                |           |
| CCT(K)            | 3000K/4000K standard. Different CCT upon request. |           |
| Luminous (lm) ±5% | 140 lm/W                                          |           |
| CRI               | Ra>80                                             |           |
| Beam Angle (°)    | 8°/15°/24°/38°/55°                                |           |
| LED Driver        | External LED driver                               |           |
| Dimming Option    | On-off / 1-10v / Triac / Dali                     |           |
| UGR               | <19                                               |           |
| IP Rating         | IP20                                              |           |
| Product Colour    | Black                                             |           |
| Baffle Colour     | Matt Black / Matt White / Silver                  |           |
| Materials         | Aluminum Die-casting                              |           |
| Lifetime (hr)     | 50,000h                                           |           |
| Operating Temp.   | -20°~50°                                          |           |

| Code           | VR390L18W |      |
|----------------|-----------|------|
|                | CCT       | BEAM |
| VR390L18WC3B8  | 3000K     | 8°   |
| VR390L18WC4B8  | 4000K     | 8°   |
| VR390L18WC3B15 | 3000K     | 15°  |
| VR390L18WC4B15 | 4000K     | 15°  |
| VR390L18WC3B24 | 3000K     | 24°  |
| VR390L18WC4B24 | 4000K     | 24°  |
| VR390L18WC3B38 | 3000K     | 38°  |
| VR390L18WC4B38 | 4000K     | 38°  |
| VR390L18WC3B55 | 3000K     | 55°  |
| VR390L18WC4B55 | 4000K     | 55°  |

| Code           | VR390L24W |      |
|----------------|-----------|------|
|                | CCT       | BEAM |
| VR390L24WC3B8  | 3000K     | 8°   |
| VR390L24WC4B8  | 4000K     | 8°   |
| VR390L24WC3B15 | 3000K     | 15°  |
| VR390L24WC4B15 | 4000K     | 15°  |
| VR390L24WC3B24 | 3000K     | 24°  |
| VR390L24WC4B24 | 4000K     | 24°  |
| VR390L24WC3B38 | 3000K     | 38°  |
| VR390L24WC4B38 | 4000K     | 38°  |
| VR390L24WC3B55 | 3000K     | 55°  |
| VR390L24WC4B55 | 4000K     | 55°  |

