


VR90S





Tiltable Recessed Downlight




VR90S10W

CODE	VR90S10W
Dimension(mm)	Ø115x84mm
Cutout (mm)	Ø100mm
System power (W)	10W
Input Voltage(V)	220-240VAC 50/60Hz
Light Source	Osram COB
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	140 lm/W
CRI	Ra>80
Beam Angle (°)	15°/ 24°/36°
LED Driver	External LED drivers
Dimming Option	On-off / 1-10v / Triac / Dali
UGR	<19
IP Rating	IP20
Product Colour	Matt Black / Matt White / Silver
Materials	Aluminum Die-casting
Lifetime (hr)	50,000h
Operating Temp.	-20°~50°

Code	CCT	BEAM
VR90S10WC3B15	3000K	15°
VR90S10WC4B15	4000K	15°
VR90S10WC3B24	3000K	24°
VR90S10WC4B24	4000K	24°
VR90S10WC3B36	3000K	36°
VR90S10WC4B36	4000K	36°

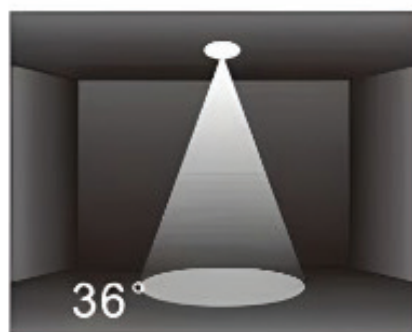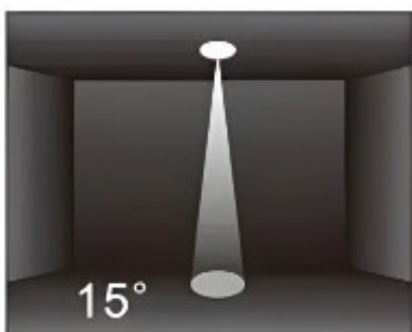



VR90S30W

CODE	VR90S30W
Dimension(mm)	Φ19x124.5mm
Cutout (mm)	Φ170mm
System power (W)	30W
Input Voltage(V)	220-240VAC 50/60Hz
Light Source	Osram COB
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	140 lm/W
CRI	Ra>80
Beam Angle (°)	15°/ 24°/36°
LED Driver	External LED drivers
Dimming Option	On-off / 1-10v / Triac / Dali
UGR	<19
IP Rating	IP20
Product Colour	Matt Black / Matt White / Silver
Materials	Aluminum Die-casting
Lifetime (hr)	50,000h
Operating Temp.	-20°~50°

Code	CCT	BEAM
VR90S30WC3B15	3000K	15°
VR90S30WC4B15	4000K	15°
VR90S30WC3B24	3000K	24°
VR90S30WC4B24	4000K	24°
VR90S30WC3B36	3000K	36°
VR90S30WC4B36	4000K	36°

