


VRAD



Tilttable TRIMLESS DOWNLIGHT


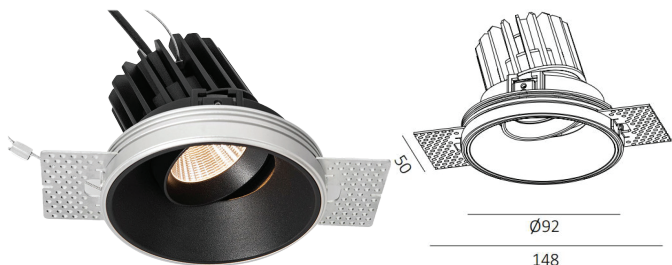



18

VRADR

CODE	VRADR
Dimension(mm)	Ø92x81
Cutout (mm)	Ø92
System power (W)	10W
Input Voltage(V)	220-240VAC 50/60Hz
Light Source	Citizen
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	884-947 lm
CRI	Ra>80
Beam Angle (°)	15° / 24°/38°/60°
LED Driver	External LED drivers: constant-current
Dimming Option	On-off / 1-10v / Triac / Dali
UGR	<19
IP Rating	IP54
Product Colour	Black
Front Ring Colour	Black / White
Materials	Aluminum Die-casting
Lifetime (hr)	50,000h
Operating Temp.	-20°~45°

Code	CCT	BEAM
VRADRC3B15	3000K	15°
VRADRC4B15	4000K	15°
VRADRC3B24	3000K	24°
VRADRC4B24	4000K	24°
VRADRC3B38	3000K	38°
VRADRC4B38	4000K	38°
VRADRC3B60	3000K	60°
VRADRC4B60	4000K	60°





18

VRADS

CODE	VRADS
Dimension(mm)	92.5x92.5x81
Cutout (mm)	92.5x92.5
System power (W)	10W
Input Voltage(V)	220-240VAC 50/60Hz
Light Source	Citizen
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	884-947 lm
CRI	Ra>80
Beam Angle (°)	15° / 24°/38°/60°
LED Driver	External LED drivers: constant-current
Dimming Option	On-off / 1-10v / Triac / Dali
UGR	<19
IP Rating	IP54
Product Colour	Black
Front Ring Colour	Black / White
Materials	Aluminum Die-casting
Lifetime (hr)	50,000h
Operating Temp.	-20°~45°

Code	CCT	BEAM
VRADSC3B15	3000K	15°
VRADSC4B15	4000K	15°
VRADSC3B24	3000K	24°
VRADSC4B24	4000K	24°
VRADSC3B38	3000K	38°
VRADSC4B38	4000K	38°
VRADSC3B60	3000K	60°
VRADSC4B60	4000K	60°

