


VRL4266 Linear Profile Downlight

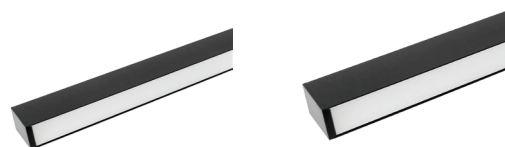

CODE	VRL4266F4	VRL4266F8
Dimension(mm)	1236x42x66	2455x42x66mm
System power (W)	32W	64W
Input Voltage(V)	AC 100-277V 50/60hz	
Light Source	SMD2835	
SDCM	<5	
CCT(K)	3000K/4000K standard. Different CCT upon request.	
Luminous (lm) ±5%	2669-2830lm	5339-5662lm
CRI	Ra>85	
Beam Angle (°)	105°	
LED Driver	Built-in Power supply	
Dimming Option	On-off / 1-10v / DAL / Triac	
IP Rating	IP20	
Product Colour	White /Black/ Silver	
Materials	Aluminum 6063-T5,	
Lifetime (hr)	50,000h	
Operating Temp.	-20°C~+45°C	

VRL4266F4

VRL4266F8

4ft Surface Mounted Code	VRL4266F4S	
	CCT	COLOR
VRL4266F4SC3WH	3000K	White
VRL4266F4SC4WH	4000K	White
VRL4266F4SC3BL	3000K	Black
VRL4266F4SC4BL	4000K	Black
VRL4266F4SC3SI	3000K	Silver
VRL4266F4SC4SI	4000K	Silver

4ft Pendant Code	VRL4266F4P	
	CCT	COLOR
VRL4266F4PC3WH	3000K	White
VRL4266F4PC4WH	4000K	White
VRL4266F4PC3BL	3000K	Black
VRL4266F4PC4BL	4000K	Black
VRL4266F4PC3SI	3000K	Silver
VRL4266F4PC4SI	4000K	Silver

8ft Surface Mounted Code	VRL4266F8S	
	CCT	COLOR
VRL4266F8SC3WH	3000K	White
VRL4266F8SC4WH	4000K	White
VRL4266F8SC3BL	3000K	Black
VRL4266F8SC4BL	4000K	Black
VRL4266F8SC3SI	3000K	Silver
VRL4266F8SC4SI	4000K	Silver

8ft Pendant Code	VRL4266F8P	
	CCT	COLOR
VRL4266F8PC3WH	3000K	White
VRL4266F8PC4WH	4000K	White
VRL4266F8PC3BL	3000K	Black
VRL4266F8PC4BL	4000K	Black
VRL4266F8PC3SI	3000K	Silver
VRL4266F8PC4SI	4000K	Silver

