

INSTALLATION MANUAL

VRL5570 LINEAR PROFILE DOWNLIGHT

VRL5570F4
31W
220-240VAC
IP66

VRL5570F8
61W
220-240VAC
IP66

IP20

50000 HOURS

CRI ≥ 80

RoHS

CE






VRL5570F4





VRL5570F8



CEILING MOUNTED

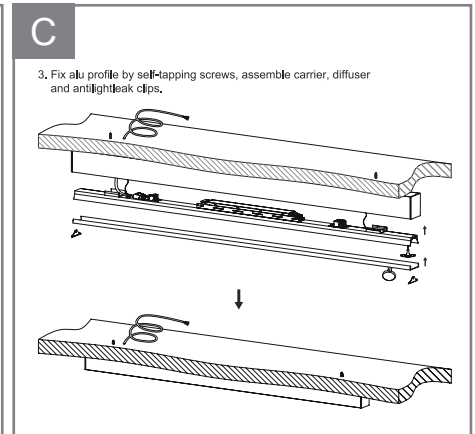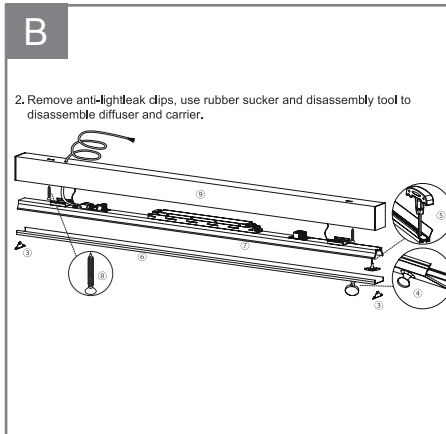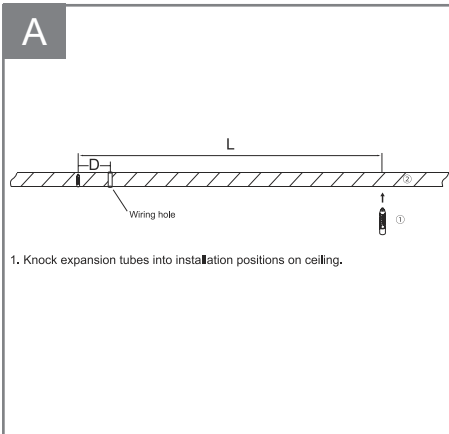

PENDANT

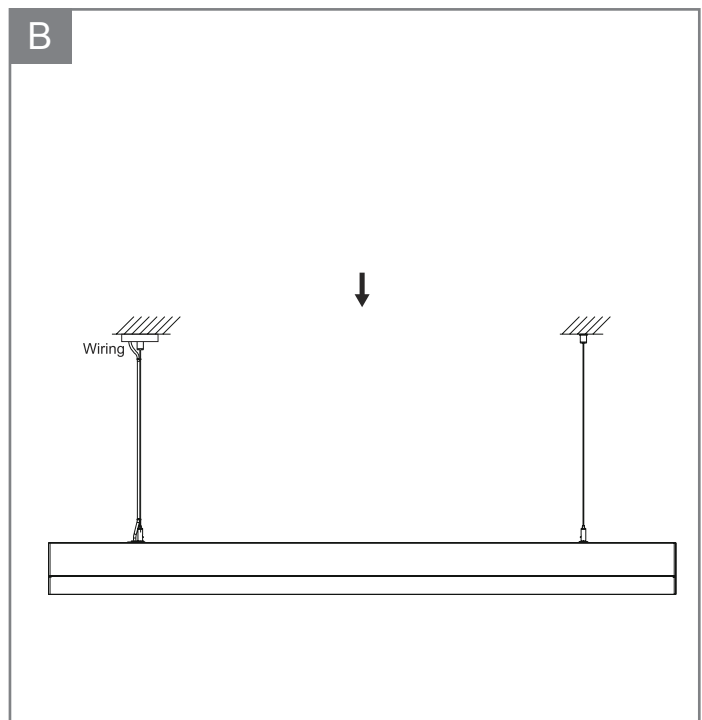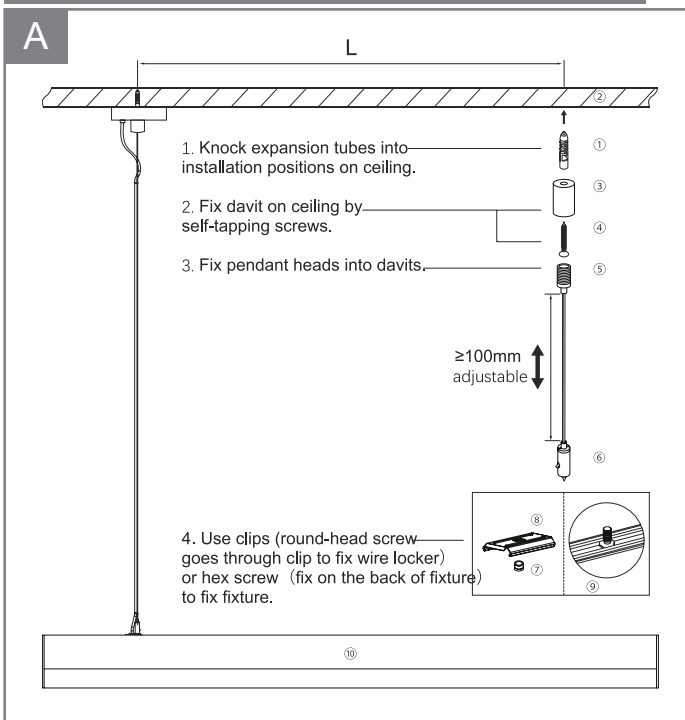

- Always disconnect the power supply before installing or performing any maintenance operations.
- Installation should be carried out by a suitably qualified person in accordance with good electrical practice and the appropriate national wiring regulations.
- These luminaires are widely used in commercial lighting, home decoration lighting, art gallery and museums.
- Only can be touched after 3 minutes later when power off, so as to avoid burns.
- Dismantling and refit are forbidden
- Installation on inflammables is forbidden.

If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.